

Low-energy light bulbs, computers, tablets and the blue light hazard

JB O'Hagan, M Khazova and LLA Price

Abstract

The introduction of low energy lighting and the widespread use of computer and mobile technologies have changed the exposure of human eyes to light. Occasional claims that the light sources with emissions containing blue light may cause eye damage raise concerns in the media. The aim of the study was to determine if it was appropriate to issue advice on the public health concerns. A number of sources were assessed and the exposure conditions were compared with international exposure limits, and the exposure likely to be received from staring at a blue sky. None of the sources assessed approached the exposure limits, even for extended viewing times.

Eye (2016) 30, 230–233; doi:10.1038/eye.2015.261; published online 15 January 2016

Introduction

Humans evolved under light from the sun. For ~100 years reliable artificial light was available from incandescent lamps: a source of light that was similar in spectrum to that received from the sun. The pressure to use less energy has resulted in the phase-out of incandescent lighting, which is being replaced by so-called low energy devices, such as compact fluorescent lamps (CFLs) and light emitting diodes (LEDs). In parallel, incandescent indicator lamps in electrical and electronic products have been replaced with LEDs.

During the evolution of the lighting industry, many lessons have been learned in terms of the positioning of lamps in relation to the eye. For example, if a high luminance source is in the field of view, even if the exposure condition is not harmful, the exposure may result in glare,

dazzle, and compromise the ability to carry out visual tasks. Therefore, traditional sources tend to be shielded from direct viewing when the direction of gaze is horizontal or below. Staring directly up into a light source would be considered unusual behaviour. However, studies have been published¹ that imply risks of adverse health effects under extreme exposure conditions, which are then highlighted by the media.

The development of handheld computer-based technology has provided the opportunity for long-term viewing of illuminated screens. From a practical perspective, the luminance of the sources has to be low to be comfortable to view. However, it is recognised that many people are using laptop or tablet computers, or mobile phone technology, for many hours per day.

Blue light has been known to be phototoxic for the retina for many years.² The biological evidence is reviewed periodically by organisations, such as the International Commission on Non-ionising Radiation Protection (ICNIRP), resulting in the publication of guidelines.³ The guidelines represent levels below which adverse health effects are unlikely. In terms of retinal exposure to light, some wavelengths are more effective at causing harm than others. This is recognised by an action spectrum for the blue light hazard, which is shown graphically in Figure 1. To assess an exposure condition, the spectrum of light at a specific location is measured and the value at each wavelength is weighted by the relevant factor at that wavelength. Finally, the weighted values are summed to give a weighted radiance or irradiance for comparison with the guideline exposure limit.

ICNIRP has proposed a 'rule of thumb' luminance trigger level for white light sources, suggesting that detailed assessments are not required for luminance values below 10^4 cd m^{-2} .⁴ This rule takes account of the proportion of blue light likely to be contained in the total luminance of the source.

Centre for Radiation,
Chemical and
Environmental Hazards,
Public Health England,
Chilton, Didcot, Oxfordshire,
UK

Correspondence:
JB O'Hagan, Public Health
England, Group Leader,
Laser and Optical Radiation
Dosimetry Group, CRCE,
Chilton, Didcot,
Oxfordshire, OX11 0RQ, UK
Tel: 01235 825061;
Fax: 01235 822650.
E-mail: john.ohagan@phe.
gov.uk

Received: 17 November 2015
Accepted: 18 November 2015
Published online:
15 January 2016

The ICNIRP guidelines from 1997⁴ were incorporated into the Artificial Optical Radiation Directive,⁵ which limits the level of optical radiation exposure to workers.

This study does not address the implications of exposure to light for effects other than retinal damage.

Materials and methods

To provide a comparison with natural exposures to blue light, the spectral irradiance incident on the earth in southern UK (Chilton, 51.5750° N, 1.3177° W) was assessed from a clear blue sky in summer and for a cloudy day in winter. The radiance was determined using a charged coupled device (CCD) array spectrometer (QE65000, Ocean Optics, Inc., Dunedin, FL, USA), fibre coupled to a diffuser (Bentham Instruments, Reading, UK). A collimating tube mounting on top of the diffuser, 10 mm diameter and 200 mm long, limited the field of view.

A range of lamps (CFL and LED), computer screens, tablet computers, laptops, and smartphones were assessed for comparison with the blue light hazard exposure limit. In addition, an HDMI computer display switch with blue LED indicator lamps was assessed owing to concern from an ophthalmologist. Measurements were made using an Exemplar Plus CCD array spectroradiometer (B&W Tek Inc., Newark, DE, USA), S/N 655, coupled by a metal jacketed QP600-2-SR/BX optical fibre (Ocean Optics, Inc., Dunedin, FL, USA) to a D7-H diffuser, S/N 10083 (Bentham Instruments, Reading, UK). The system was calibrated using 1000 W tungsten-halogen lamps, calibrated for spectral irradiance to the Physikalisch-Technische Bundesanstalt traceable reference standards, S/N 548.

To assess worst case exposure conditions for someone staring at a screen for extended periods of time, images of various colours were generated using the Microsoft RGB colour gamut. The spectral irradiance incident on a person viewing the screen with the different colours was assessed.

Measurements were carried out with an open field of view to maximise the amount of light collected. If the exposure limit was not exceeded under these

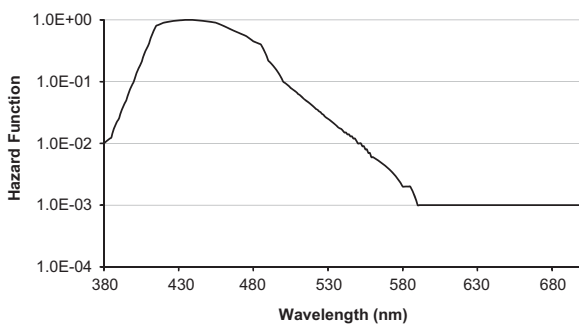


Figure 1 Blue light hazard action spectrum.

conditions then it would not be exceeded with a restricted field of view.

Results

The spectral irradiance from an incandescent lamp and a retrofit LED lamp are shown in Figure 2. Applying the blue light hazard weighting (Figure 1) emphasises the blue part of the spectrum, as shown in Figure 3. The blue light weighted radiance is summed and then compared with the radiance limit. A similar process was carried out for each source described below.

The blue sky spectral radiance, assessed for a typical clear day in June and a cloudy day in December was weighted with the blue light hazard weighting function to determine the blue light hazard. The weighted radiance was 10.4 W m⁻² sr⁻¹ and 3.4 W m⁻² sr⁻¹ in June and December, respectively. The ICNIRP exposure limit² for long-term viewing (that is, staring at the sky) is 100 W m⁻² sr⁻¹. Therefore, it can be seen that these exposures represent 10.4% and 3.4% of the exposure limit. The luminance of the sky was also determined and the ratio of blue light hazard to luminance

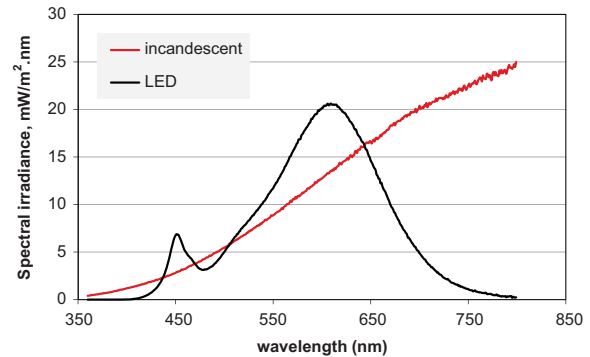


Figure 2 Spectral irradiance from an incandescent lamp and an LED lamp.

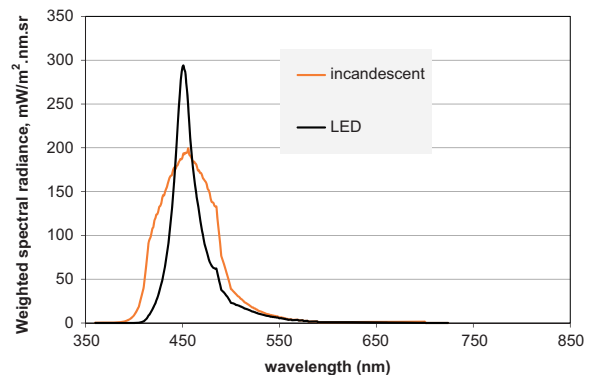


Figure 3 Blue light weighted spectral radiance from the lamps in Figure 2.

calculated. For the summer and winter exposures, the hazard ratio was 1.09×10^{-3} and $1.46 \times 10^{-3} \text{ W lm}^{-1}$, respectively ($\text{W m}^{-2} \text{ sr}^{-1} / \text{cd m}^{-2} = \text{W lm}^{-2}$, where $1 \text{ cd} = 1 \text{ lm sr}^{-1}$). This parameter is useful for assessing similar sources that may vary in luminance, but have identical emission spectra: it permits an assessment of the blue light hazard by measuring the luminance.

The blue light hazard from an incandescent lamp was compared with two LED and one CFL retrofit domestic lamps and with a 600 mm square panel intended for office lighting. Apart from the panel lamp, all sources exceeded the ICNIRP rule of thumb luminance value of 10^4 cd m^{-2} by factors of between four and eight times. As the panel was an extended source, the luminance was lower and was 35% of 10^4 cd m^{-2} . In terms of blue light hazard the domestic lamps ranged from 10 to 20% of the exposure limit, assuming intentional long-term viewing ($> 10\,000 \text{ s}$ per day). It was notable that the incandescent lamp was towards the middle of the range (14%). The panel

lamp was 1.7% of the blue light exposure limit. The blue light to luminance hazard ratios were similar for the domestic lamps, ranging from 2.3×10^{-4} to $2.9 \times 10^{-4} \text{ W lm}^{-1}$. The panel lamp had a ratio of $5.0 \times 10^{-4} \text{ W lm}^{-1}$.

Screens were divided into computer monitors, laptop screens, tablet computers, and smartphones. All devices were set to maximum brightness. After the first batch of measurements, it was clear that the highest luminance and blue light spectral irradiance occurred from a white screen. Any other colours were generated by removing part of the emission from the device. Therefore, only the worst case, white screen results are presented in Table 1.

Following concerns from an ophthalmologist, an HDMI computer display switch with three blue LED indicators was assessed at a worst case viewing distance of 100 mm. As the LEDs were not white light sources, the rule of thumb of 10^4 cd m^{-2} was not appropriate. However, the luminance of the LEDs was over twice this value. The blue light weighted radiance limit for

Table 1 Luminance and blue light hazard from computer screens, laptops, tablet computers, and smartphones

| ID | Luminance, cd m^{-2} | % of ICNIRP 10^4 cd m^{-2} rule of thumb (%) | Blue light weighted radiance, $\text{W m}^{-2} \text{ sr}^{-1}$ | % of ICNIRP blue light exposure limit (%) | Hazard ratio, W lm^{-1} |
|--------------------------------|-------------------------------|--|---|---|----------------------------------|
| <i>Computer monitors</i> | | | | | |
| 1 | 126 | 1.26 | 0.110 | 0.11 | 8.73×10^{-4} |
| 24 | 71 | 0.71 | 0.054 | 0.05 | 7.61×10^{-4} |
| <i>Laptop screens</i> | | | | | |
| 9 | 152 | 1.52 | 0.130 | 0.13 | 8.55×10^{-4} |
| 10 | 63 | 0.63 | 0.048 | 0.05 | 7.61×10^{-4} |
| 11 | 101 | 1.01 | 0.084 | 0.08 | 8.32×10^{-4} |
| 12 | 88 | 0.88 | 0.072 | 0.07 | 8.18×10^{-4} |
| 14 | 148 | 1.48 | 0.120 | 0.12 | 8.11×10^{-4} |
| 15 | 137 | 1.37 | 0.110 | 0.11 | 8.03×10^{-4} |
| 20 | 104 | 1.04 | 0.082 | 0.08 | 7.88×10^{-4} |
| 22 | 184 | 1.84 | 0.150 | 0.15 | 8.15×10^{-4} |
| 23 | 197 | 1.97 | 0.170 | 0.17 | 8.63×10^{-4} |
| <i>Tablet computer screens</i> | | | | | |
| 3 | 175 | 1.75 | 0.150 | 0.15 | 8.57×10^{-4} |
| 4 | 94 | 0.94 | 0.084 | 0.08 | 8.94×10^{-4} |
| 5 | 63 | 0.63 | 0.053 | 0.05 | 8.41×10^{-4} |
| 6 | 43 | 0.43 | 0.034 | 0.03 | 7.91×10^{-4} |
| 7 | 142 | 1.42 | 0.131 | 0.13 | 9.23×10^{-4} |
| 17 | 238 | 2.38 | 0.214 | 0.21 | 8.99×10^{-4} |
| 18 | 140 | 1.40 | 0.120 | 0.12 | 8.57×10^{-4} |
| 19 | 191 | 1.91 | 0.176 | 0.18 | 9.21×10^{-4} |
| 26 | 203 | 2.03 | 0.180 | 0.18 | 8.87×10^{-4} |
| <i>Smartphone screens</i> | | | | | |
| 2 | 294 | 2.94 | 0.280 | 0.28 | 9.52×10^{-4} |
| 8 | 178 | 1.78 | 0.150 | 0.15 | 8.43×10^{-4} |
| 13 | 367 | 3.67 | 0.310 | 0.31 | 8.45×10^{-4} |
| 16 | 409 | 4.09 | 0.380 | 0.38 | 9.29×10^{-4} |
| 25 | 215 | 2.15 | 0.190 | 0.19 | 8.84×10^{-4} |

long-term viewing was exceeded by a factor of up to three. Therefore, it was necessary to determine the maximum intended exposure duration before the integrated radiance limit ($10^6 \text{ J m}^{-2} \text{ sr}^{-1}$)³ for exposure durations between 0.25 and 10 000 s was exceeded. This maximum exposure duration was ~60 min for each LED.

Discussion

Humans have evolved under natural light from the sun. Intentional staring at the sun causes eye injuries, as is reported after solar eclipses.^{6,7} However, continuous viewing of the blue sky, certainly in the UK, does not present a risk of eye injuries. Comparing natural exposures with the reasonably foreseeable exposure to optical radiation from lamps, computer screens and mobile devices, such as smartphones shows that the actual spectrally weighted irradiance is lower than the natural exposures.

For sources with similar emission spectra, it is possible to measure the luminance and predict the blue light hazard, as the ratio of blue light weighted irradiance to luminance is approximately constant for a given type of source.

In conclusion, under even extreme long-term viewing conditions, none of the assessed sources suggested cause for concern for public health. The worst assessed source consisted of three indicator LEDs, which were unlikely to be viewed close up for long enough to cause concern. However, these sources were representative of indicator lamps that did not require the assessed luminance for their intended function. The percentage transmission of blue light from the corneal surface to the retina is age related, with the transmission for children higher than for

adults.⁸ Therefore, where such sources are uncomfortable to view for adults, they could be distressing for children.

The impact of the blue light from the studied sources on circadian rhythm and sleep quality was outside of the scope of this study.

Conflict of interest

The authors declare no conflict of interest.

References

- 1 Chamorro E, Carralero SF, Bonnin-Arias C, Pérez-Carrasco MJ, de Luna JM *et al*. Photoprotective effects of blue light absorbing filter against LED light exposure on human retinal pigment epithelial cells in vitro. *J Carcinog Mutagen* 2013 S6: 00810.4172/2157-2518.
- 2 Ham WT, Mueller HA. Retinal sensitivity to damage from short wavelength light. *Nature* 1976; **260**: 153–155.
- 3 International Commission on Non-ionizing Radiation Protection. Guidelines on limits of exposure to incoherent visible and infrared radiation. *Health Phys* 2013; **105**: 74–96.
- 4 International Commission on Non-ionizing Radiation Protection. Guidelines on limits of exposure to incoherent optical radiation (0.38–3 μm). *Health Phys* 1997; **73**: 539–554.
- 5 European Union. Directive 2006/25/EC of the European Parliament and of the Council of 5 April 2006 on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation) (19th individual Directive within the meaning of Article 16(1) of Directive 89/391/EEC). *Official Journal of the European Union* 2006; **L 114**: 38–59.
- 6 Michaelides M, Rajendram R, Marshall J, Keightley S. Eclipse retinopathy. *Eye* 2001; **15**: 148–151.
- 7 Doyle E, Sahu D, Ong G. Solar retinopathy after the 1999 solar eclipse in East Sussex. *Eye* 2002; **16**: 203–206.
- 8 International Commission on Illumination (CIE). A Computerized Approach to Transmission and Absorption Characteristics of the Human Eye, CIE 203:2012 incl. Erratum 1: Vienna, Austria, 2012.