

SCIENTIFIC REPORTS



OPEN

Biogas generation in anaerobic wastewater treatment under tetracycline antibiotic pressure

Meiqing Lu^{1,2}, Xiaojun Niu^{1,2,3}, Wei Liu^{1,2}, Jun Zhang^{1,2}, Jie Wang^{1,2}, Jia Yang^{1,2}, Wenqi Wang^{1,2} & Zhiqun Yang^{1,2}

Received: 18 January 2016

Accepted: 01 June 2016

Published: 24 June 2016

The effect of tetracycline (TC) antibiotic on biogas generation in anaerobic wastewater treatment was studied. A lab-scale Anaerobic Baffled Reactor (ABR) with three compartments was used. The reactor was operated with synthetic wastewater in the absence of TC and in the presence of 250 $\mu\text{g/L}$ TC for 90 days, respectively. The removal rate of TC, volatile fatty acids (VFAs), biogas compositions (hydrogen (H_2), methane (CH_4), carbon dioxide (CO_2)), and total biogas production in each compartment were monitored in the two operational conditions. Results showed that the removal rate of TC was 14.97–67.97% in the reactor. The presence of TC had a large negative effect on CH_4 and CO_2 generation, but appeared to have a positive effect on H_2 production and VFAs accumulation. This response indicated that the methanogenesis process was sensitive to TC presence, but the acidogenesis process was insensitive. This suggested that the presence of TC had less influence on the degradation of organic matter but had a strong influence on biogas generation. Additionally, the decrease of CH_4 and CO_2 generation and the increase of H_2 and VFAs accumulation suggest a promising strategy to help alleviate global warming and improve resource recovery in an environmentally friendly approach.

Wastewater treatment plants (WWTPs) have become an essential component to ensure necessary water supplies. However, the operation of WWTPs requires a large amount of electricity, up to 0.3–0.8 kWh/m^3 ¹. It has been estimated that wastewater treatment accounts for about 3% of the total US electrical energy load², whereas the corresponding figure in China is 0.3% on average¹. Consequently, a large amount of fossil fuels are used to produce power to meet this need for electricity, which depletes fossil fuels resources and causes environmental pollution³. Therefore, it is necessary to implement energy-saving in wastewater treatment⁴. Anaerobic wastewater treatment is a technology that can meet this goal. With the characteristics of lower power consumption⁵ and great potential to recover renewable energy^{6,7}, anaerobic wastewater treatment has developed to be a leading suggestion in wastewater treatment⁵.

Though anaerobic wastewater treatment has many advantages compared with other techniques, its adverse environmental impact is inevitable. In the process of anaerobic wastewater treatment, both intermediates and end-products of substrates have a significant impact on the environment. VFAs are intermediates of substrates in anaerobic wastewater treatment. VFAs are good carbon resources for microbes and can be used as raw materials to produce high value-added products in fermentation industry⁸. Additionally, VFAs can enhance electricity generation in microbial fuel cell (MFC)^{9,10}. The biogas, such as hydrogen(H_2), methane(CH_4), and carbon dioxide(CO_2), are the end-products of substrates in anaerobic wastewater treatment. H_2 is a clean, recyclable, and efficient energy carrier without adverse environmental impact and potentially plays a key role in sustainable energy usage¹¹. Studies have been conducted to improve H_2 production to generate power to counter part of the power consumption in wastewater treatment^{12–14}. CH_4 is also a renewable energy fuel form¹⁵, which can be recovered to replace the use of fossil fuels so that fossil fuels resources depletion and environmental pollution can be relieved to some extent¹⁶. But CH_4 is also a greenhouse gas. It has been reported that each molecule of CH_4 causes about 25 times more global warming than a molecule of CO_2 ¹⁷. The emissions of CH_4 into the atmosphere will have an adverse effect on the environment. Though CH_4 recovery has been started up in wastewater treatment⁶, its emissions is still large. A recent study reported that the emissions of CH_4 in wastewater treatment is a major

¹School of Environment and Energy, South China University of Technology, Guangzhou, 510006, PR China.

²Guangdong Provincial Key Laboratory of Atmospheric Environment and Pollution Control, Guangzhou, 510640, PR China. ³State Key Laboratory of Pollution Control and Resource Reuse, Nanjing, 210093, PR China. Correspondence and requests for materials should be addressed to X.N. (email: xjniu@scut.edu.cn)

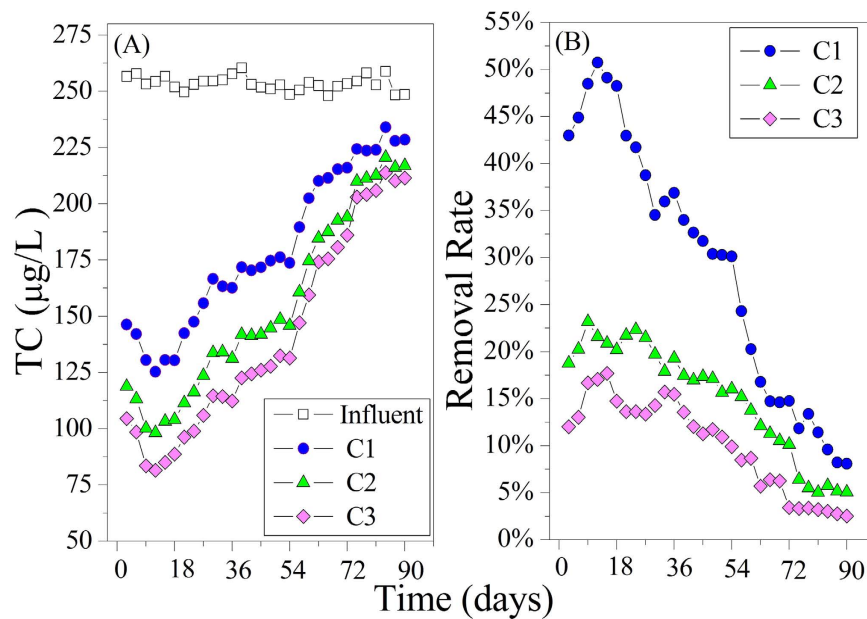


Figure 1. (A) Tetracycline concentration in the effluent of each compartment of the reactor. (B) The removal rate of TC in each compartment.

source of CH_4 in the atmosphere¹⁸. CO_2 is another major biogas produced in anaerobic wastewater treatment. It is a well-accepted greenhouse gas and is widely considered to be the main cause of global warming^{19,20}. A report showed that the CO_2 emission of a wastewater treatment plant with a daily treatment capacity of 100000 tons almost equals to total annual CO_2 emissions of 3856 households and 2603 medium-sized cars²¹. In this point of view, the emission of CO_2 in wastewater treatment greatly contributes to the global warming. Overall, the emission of biogas (H_2 , CH_4 , and CO_2) in anaerobic wastewater treatment has a significant environmental impact. Therefore, evaluation of the possible biogas generation (H_2 , CH_4 , and CO_2) in anaerobic wastewater treatment is of great significance.

However, contaminant antibiotics has been frequently detected in aquatic environment²². The concentrations of antibiotics range from ng/L to a few $\mu\text{g/L}$ in WWTPs²² and a higher level of mg/L can be detected in certain point sources such as hospital and pharmaceutical industry effluents²³. The tetracycline (TC) group is one of the most frequently detected antibiotics²⁴. It is a broad-spectrum active compound, and can inhibit bacterial protein synthesis by binding the 30S ribosomal subunit to prevent the association of the aminoacyl-tRNA to the ribosomal acceptor-A site resulting in a structural change of 16S rRNA²⁵. TC is highly sorbable onto clay materials, soil and sediments^{26,27}. Since TC is easily sorbed onto sewage sludge, it can inhibit the microbes in sludge and alter biogas generation. Therefore, evaluation of the effect of TC on biogas generation in anaerobic wastewater treatment will help to determine the potential bioresource for reuse and the environmental impact of anaerobic wastewater treatment under TC pressure. To date, most studies of TC in wastewater focused on its removal efficiency^{27–30} and its sorption in sewage sludge^{31,32}, but there has not been a comprehensive evaluation of biogas generation (H_2 , CH_4 , and CO_2) in anaerobic wastewater treatment under TC pressure.

As a high-rate anaerobic reactors, the anaerobic baffled reactor (ABR) has become an attractive option for anaerobic wastewater treatment due to its multiple advantages^{33–36}. ABR is compartmentalized with baffles allowing the partial separation of the processes of acidogenesis and methanogenesis longitudinally down the reactor so these processes occur under their favorable conditions³⁷, and biogas is efficiently generated.

The purpose of this study was to investigate the biogas generation under 250 $\mu\text{g/L}$ TC in an ABR for a long-term assessment of 90 days. The removal rate of TC, the levels of volatile fatty acids (VFAs), biogas compositions (H_2 , CH_4 , and CO_2) and total biogas production in each compartment were monitored, and the environmental impact of TC on anaerobic wastewater treatment was evaluated.

Results

Fate of tetracycline (TC) during the operation. TC was measured in the effluent and influent in each compartment in order to ascertain its removal in the reactor. Measurement indicated that TC concentrations in the effluent were always significantly lower than the corresponding influent as seen in Fig. 1. In C1, the removal rate of TC ranged from 8.10–50.74% during operation, and it increased at the beginning of TC exposure. The maximum TC removal rate (50.74%) occurred in the 12th day after TC addition, then it decreased. The rate of this decrease slowed with time. In C2, the removal rate of TC ranged from 5.05–23.18% during operation. This rate also increased in the first few after TC exposure. The maximum TC removal rate (23.18%) occurred the 9th day after TC addition and then it slowly decreased and flattened out by the final 18 days of operation. In C3, the removal rate of TC ranged from 2.52–17.71%, It reached the maximum level (17.71%) on the 15th day, plateaued

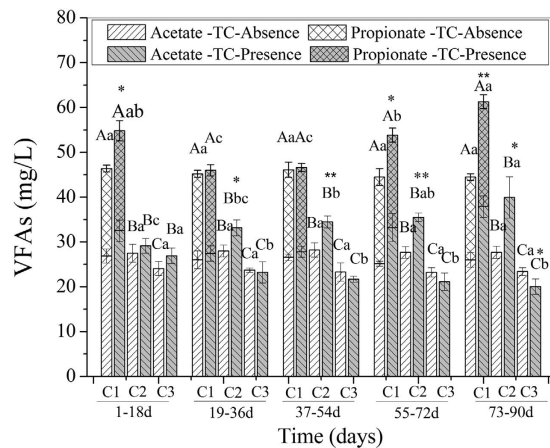


Figure 2. Responses of VFAs in each compartment of the reactor. The data are presented as means \pm SD from triplicates for each determination, ANOVA significant at $P \leq 0.05$. Separate test the significant value in TC-absence and TC-presence wastewater condition. Different capital letters indicate significantly different values among compartments at each monitored time, and different small letters indicate significantly different values among exposure times in a particular compartment (DMRT, $P \leq 0.05$). * and ** indicate the significant value of T-test between TC-absence and TC-presence wastewater operation at $P \leq 0.05$ and $P \leq 0.01$.

for a few days, increased slightly days 21–33, and then decreased and flattened out by the final 18 days of operation. Overall, the removal rate of TC was 14.97–67.97% in the reactor.

Effects of TC on volatile fatty acids (VFAs) in the ABR. The performance of volatile fatty acids (VFAs) under the two conditions is shown in Fig. 2. The detected VFAs were acetate and propionate, and propionate was detected only in C1. The average concentrations of VFAs in C1, C2, and C3 were 45.33 mg/L, 27.81 mg/L, and 23.53 mg/L, respectively, in the TC-absence wastewater.

The concentration of VFAs were at higher levels with TC exposure than in the absence of TC in C1 and C2: 45.99–54.80 mg/L (C1) and 29.12–39.93 mg/L (C2), corresponding to 1.01–1.35 times and 1.05–1.44 times the average in the TC-absence wastewater. In C3, the response of VFAs was quite different from C1 and C2. In the initial 18 days with TC exposure, the concentration of VFAs was slightly higher than the average in the TC-absence wastewater, and then showed a slight decrease during the operation. The corresponding averages of VFAs were 20.02–26.91 mg/L, which was 85.08–114.36% of the average in the TC-absence wastewater. T-test results showed that TC has a significant effect on VFAs in days 1–18 and days 55–72 in C1, in days 19–36 and days 73–90 in C2, and in days 73–90 in C3, and a very significant effect on VFAs in days 73–90 in C1, and in days 37–54 and days 55–72 in C2.

Effects of TC on biogas compositions (H_2 , CH_4 , CO_2) in the ABR. The performances of gas compositions (H_2 , CH_4 , CO_2) are shown in Fig. 3. The monitored gases were H_2 , CH_4 , CO_2 , which are the dominant biogas produced in anaerobic wastewater treatment process.

H_2 was only detected in C1 (Fig. 3A). The generation average of H_2 in C1 was 0.0102 L/(g MLSS \cdot d) in the TC-absence wastewater. With TC exposure, the generation of H_2 in C1 showed a sharply increase. The averages H_2 generation was 0.0413–0.0703 L/(g MLSS \cdot d), which corresponded to 4.05–6.89 times that of the average in the TC-absence wastewater. T-test results showed that TC had a very significant effect on H_2 generation in C1 during the exposure.

CH_4 (Fig. 3B) was produced in all compartments in the reactor. In the TC-absence wastewater operation, the average generation of CH_4 was 0.3204 L/(g MLSS \cdot d), 0.1462 L/(g MLSS \cdot d), and 0.881 L/(g MLSS \cdot d) in C1, C2, and C3, respectively. With TC addition, levels decreased to different extents in the different compartments. The generation of CH_4 was 0.1407–0.2570 L/(g MLSS d), 0.0398–0.1167 L/(g MLSS d), and 0.0337–0.0737 L/(g MLSS d) in C1, C2, and C3 with TC exposure, which corresponded to 43.90–80.20%, 27.18–79.79%, and 38.24–83.70% of the average in the TC-absence wastewater. T-test results showed that TC had a very significant effect on CH_4 generation in all compartments during TC exposure except for days 1–18 in C3 (a significant effect).

For CO_2 (Fig. 3C), the average generation of CO_2 was 0.3970 L/(g MLSS \cdot d), 0.1364 L/(g MLSS \cdot d), and 0.0823 L/(g MLSS \cdot d) in C1, C2, and C3 respectively in the operation of TC-absence wastewater. With TC exposure, the generation of CO_2 decreased to 0.1592–0.3095 L/(g MLSS \cdot d), 0.0349–0.0943 L/(g MLSS \cdot d), and 0.0330–0.0472 L/(g MLSS \cdot d) with TC exposure. That corresponded to 40.10–77.95%, 25.61–69.18%, and 40.07–57.39% of the average in the TC-absence wastewater. T-test results showed that TC had a very significant effect on CO_2 generation in all compartments during TC exposure.

Obviously, TC enhanced H_2 production and reduced CH_4 and CO_2 production, and the reduction of CH_4 production was smaller than the effect on CO_2 production.

Effects of TC on the total biogas generation in the ABR. The average total biogas generation in ABR was 31.23 L/d (18.62 L/d, 8.06 L/d, and 4.55 L/d in C1, C2, and C3, respectively) in the TC-absence wastewater

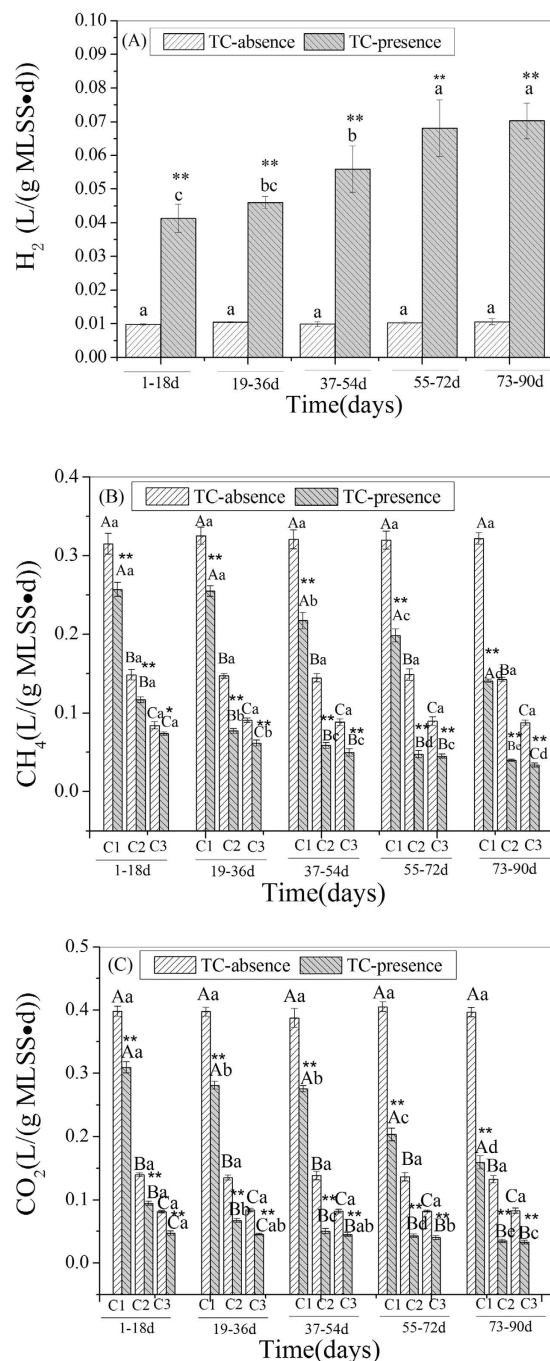


Figure 3. Responses of biogas compositions (H_2 , CH_4 , CO_2) in each compartment of the reactor: (A) H_2 ; (B) CH_4 ; (C) CO_2 . The data are presented as means \pm SD from triplicates for each determination, ANOVA significant at $P \leq 0.05$. Separate test the significant value in TC-absence and TC-presence wastewater condition. Different capital letters indicate significantly different values among compartments at each monitored time, and different small letters indicate significantly different values among exposure times in a particular compartment (DMRT, $P \leq 0.05$). * and ** indicate the significant value of T-test between TC-absence and TC-presence wastewater operation at $P \leq 0.05$ and $P \leq 0.01$.

while the corresponding average levels were 18.98 L/d (11.54 L/d, 4.81 L/d, and 2.63 L/d in C1, C2, and C3, respectively) in the TC-presence wastewater (Fig. 4). Obviously, TC showed a negative effect on the biogas generation in our study. The total biogas decline rate was 39.23%, a combination of the increased H_2 production and decreased CH_4 and CO_2 production.

Discussion

Quite different removal rate of TC either in WWTPs^{27,30} or Lab-scale experiments have been reported^{25,31,38,39}. For instance, a TC removal rate of 67.9–100% was reported by Karthikeyan and Meyer⁴⁰ after secondary

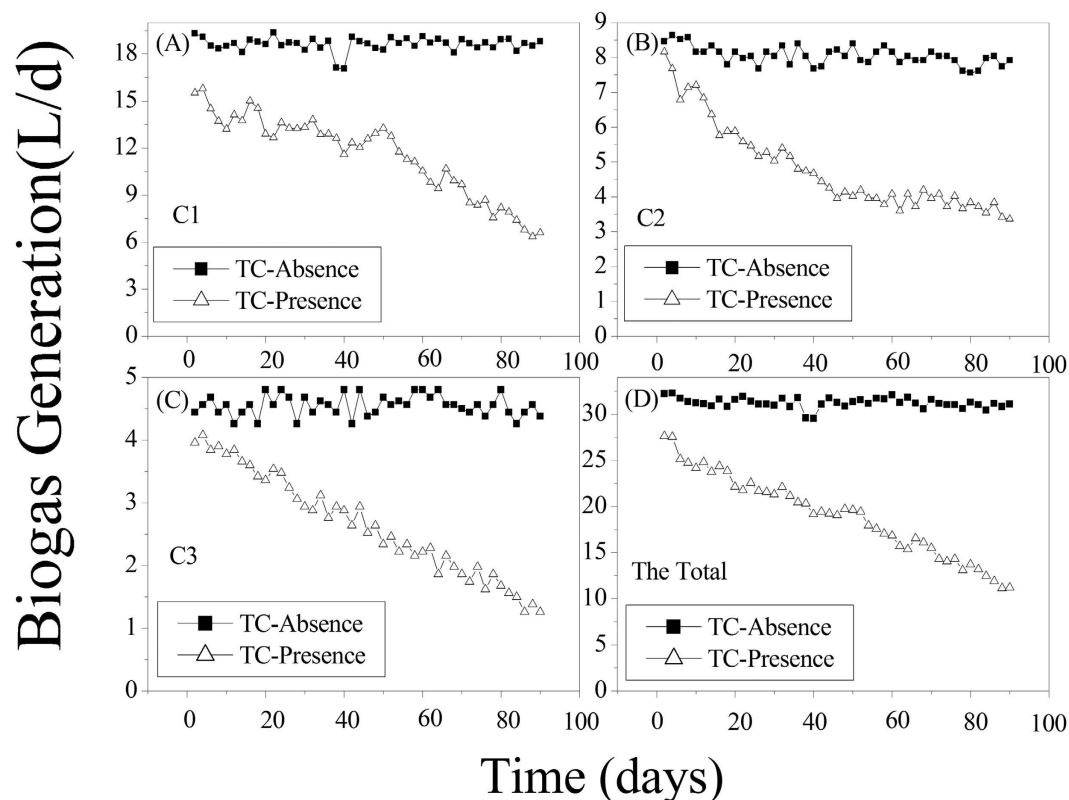


Figure 4. Responses of biogas generation in each compartment of the reactor: (A) C1; (B) C2; (C) C3; (D) Total biogas generation in the reactor.

wastewater treatment in a WWTP. In the lab-scale experiments, Cetecioglu *et al.*²⁵ measured the removal rate of TC as 40–90% in different phases in a anaerobic sequencing batch reactor before metabolic activities practically declined and nearly ceased. Aydin *et al.*³⁹ found that TC removal efficiency ranged from 60–95%, and this rate was lower than 3% when the COD removal efficiency and biogas production significantly decline after dosing with an antibiotic mixture (containing TC). Kim *et al.*³¹ reported a TC removal rate of 78.4% in a sequencing batch reactor spiked with 250 µg/L TC, and Matos *et al.*³⁸ observed a 28% TC removal rate in a sequencing batch biofilm reactor. In our present study, the overall TC removal rate was 14.97–67.97% in the reactor: 8.10–50.74% of C1, 5.05–23.18% of C2, and 2.52–17.71% of C3. The different results in these studies could be attributed to variations in the anaerobic reactor types, the cultivation and operating conditions or antibiotic combinations and concentrations used in the studies. In our present study, the increase in the TC removal rate at the beginning of TC exposure in all compartments and the temporary fluctuations of TC removal rate in C2 and C3 could be explained by sorption mechanism. When sludge-solution equilibrium was reached, the TC removal rate in the relatively balanced state could be explained by the biodegradation mechanism. As shown in Fig. 1, the TC removal rate in all compartments increased at the beginning of TC exposure because the adsorption capacity of sludge was high and the TC was easily sorbed onto sludge. As sorption continued, the adsorption capacity of sludge decreased, resulting in a decrease in the TC removal rate. The TC removal rate in C2 and C3 declined slower than in C1. This was probably due to the delay of reaching sludge-solution equilibrium in subsequent compartments due to the influenced of the effluent from the prior compartment. The slight increase of TC removal rate in C3 during days 21–33 resulted because the increase of effluent TC concentration from front compartment forced the sludge to absorb a lot of TC to reach a new sludge-solution equilibrium. With longer processing time, TC tended to reach sludge-solution equilibrium in all compartments, and then TC removal rate reached a relatively balanced state. During this time, sorption was in a dynamic balance and had very little to do with TC removal, so biodegradation was responsible for the TC removal in this period. In general, sorption and biodegradation could explain the TC removal rate in our study, and sorption was the main factor, which is consistent with most previous studies²⁶.

VFAs were intermediate of substrates in the acidification processes of anaerobic biodegradation, and resulting in the eventual production of H₂, CH₄ and CO₂. The determination of VFAs is an essential prerequisite to determine the impact of TC on metabolic activities under anaerobic conditions. In our present study, the detected VFAs were acetate and propionate, and propionate was only detected in C1. This indicated that the fermentation pattern in the reactor was typical of propionic-type fermentation, and the conversions of propionate to acetate was more efficient in C2 and C3. As seen in Fig. 2, the concentrations of VFAs in C1, C2, and C3 on average were 45.33 mg/L, 27.81 mg/L, and 23.53 mg/L, respectively, in the TC-absence wastewater. Obviously, VFAs concentration decreased longitudinally down the reactor due to the compartmentalization of the active processes of acidification and methanogenesis, VFAs were produced during the acidification, so the front compartment

would likely generate more VFAs. Additionally, the available substrates for acidification decreased and the efficient conversions of VFAs to CH_4 and CO_2 increased longitudinally down the reactor. That is consistent with the previous studies^{33,36}. With TC exposure, the concentration of VFAs in C1 and C2 corresponded to 1.01–1.35 times and 1.05–1.44 times higher than that of the average in the TC-absence wastewater. Similar findings were reported by Aydin *et al.*⁴¹ who found that feeding an antibiotic mixture (containing TC) feeding in an anaerobic sequencing batch reactor showed a greater accumulation of VFAs during anaerobic digestion compared with a no-antimicrobial control. Stone *et al.*⁴² also reported that the concentration of VFAs increased in the presence of oxytetracycline (a kind of TC antibiotic) during operation of an anaerobic digester. The accumulation of VFAs resulted from change in the dynamic balance of generation from glucose acidification by acetogens and H_2/CO_2 conversion by homoacetogenic bacteria, and the utilization of acetate by aceticlastic methanogens to produce CH_4 under anaerobic conditions¹⁶. There are three reasons for the increased VFAs accumulation observed in our study. First, acetate conversion would be inhibited because the presence of the antibiotic could have a dramatic effect on aceticlastic methanogens^{43,44}, this is consistent with the decrease of CH_4 production shown in Fig. 3B. Second, the conversion of H_2/CO_2 by homoacetogenic bacteria to acetate might be promoted because more H_2 (Fig. 3A) was available with TC exposure, but this process required certain conditions and thus only made a small contribution¹⁵. Third, COD degradation efficiency was promoted in the TC-presence wastewater (see Supplementary Information Figure S1), which indicated increased VFAs generation. That further suggested that acetogens could survive and proliferate under these conditions because sensitive species were inhibited, as demonstrated by faster growth kinetics and a better adaptation rate of antibiotics⁴⁵. Additionally, the temporary fluctuations of VFAs concentration matched the fluctuations of COD degradation (see Supplementary Information Figure S1), suggesting which illustrated that glucose acidification played a role in the observed change in VFAs concentration. In C3, the response of VFAs was quite different from that of C1 and C2 and the concentration of VFAs in the TC-presence wastewater was 85.08–114.36% of the average in the TC-absence wastewater. Except for the initial 18 days of TC exposure, the concentration of VFAs was lower than the average in the TC-absence wastewater during operation. The reasons were illustrated as follows. Glucose acidification was promoted in the initial 18 days (see Supplementary Information Figure S1), which could explain the temporarily higher level of VFAs concentration in the TC-presence wastewater than in the TC-absence wastewater during that time. With time increased, glucose acidification was inhibited (see Supplementary Information Figure S1) and the VFAs generation was decreased, which was mainly due to the inhibition of acetogens. C3 was a weak zone of acidification and acetogens were vulnerable to TC inhibition under its continuous stress. Though VFAs accumulation can be enhanced by the inhibition of the conversion of VFAs to CH_4 by aceticlastic methanogens, the inhibition generation from glucose acidification by acetogens caused a decrease in VFAs, resulting in a lower concentration of VFAs in TC-presence wastewater treatment.

H_2 was measured in C1, but it was not detected in C2 and C3. A similar was reported by Ban *et al.*³³ who detected H_2 only in the front few compartments of ABR. In the ABR, the active zone of acidogenesis and methanogenesis are longitudinally down the reactor. C1 was an active acidification zone and H_2 was effectively produced. C2 and C3 show increasing active methanogenesis, in which H_2 can effectively transfer to CH_4 by hydrogenotrophic methanogens. The measured H_2 was significantly promoted in C1 with TC exposure (Fig. 3A), reaching levels 4.05–6.89 times of the average in TC-absence wastewater. H_2 is generated from glucose acidification by acetogens, and homoacetogenic bacteria or hydrogenotrophic methanogens can utilize H_2 to convert acetate or CH_4 . As discussed in the VFAs section, glucose acidification was more efficient in the presence of TC in C1 (see Supplementary Information Figure S1), which could enhance H_2 generation. Additionally, hydrogenotrophic methanogens were inhibited under TC pressure⁴⁴, which reduced H_2 consumption and thus resulting in an increase in H_2 accumulation.

CH_4 is the terminal end-product of glucose anaerobic digestion. Aceticlastic methanogens and hydrogenotrophic methanogens are primarily responsible for this process. Aceticlastic methanogens transform acetate to CH_4 (about 70% of the total CH_4) and hydrogenotrophic methanogens can utilize H_2/CO_2 to produce CH_4 (about 30% of the total CH_4)^{46,47}. The production of CH_4 in the TC-presence wastewater in C1, C2, and C3 corresponded to 43.90–80.20%, 27.18–79.79%, and 38.24–83.70%, respectively, that of the average in the TC-absence wastewater. TC reduced the production of CH_4 in all compartments. Similarly, a 25% reduction in CH_4 generation by the presence of TC was reported in swine manure sequencing batch reactors⁴⁸ and a 50% reduction in CH_4 generation was reported in an anaerobic digestion in the presence of chlortetracycline (a kind of tetracycline antibiotic)⁴⁹. The inhibition of both aceticlastic methanogens and hydrogenotrophic methanogens under TC pressure likely explains the decrease of CH_4 production and the increase in VFAs (Fig. 2) and H_2 (Fig. 3A) accumulation in our study resulted from this inhibition. This is consistent previous studies which suggested that methanogens are more sensitive to changes than other microorganisms under antibiotic pressure in anaerobic digestion^{50,51}.

Glucose acidification by acetogens and acetate conversion by aceticlastic methanogens are the two pathways for CO_2 generation in anaerobic condition. The utilization of CO_2 (by combining with H_2) to convert CH_4 (hydrogenotrophic methanogens) or acetate (homoacetogenic bacteria) also affect the CO_2 accumulation. In our study, CO_2 production in C1, C2, and C3 in the TC-presence wastewater corresponded to 40.10–77.95%, 25.61–69.18%, and 40.07–57.39% of the average in the TC-absence wastewater. Obviously, TC reduced CO_2 production, similar to the findings of Stone *et al.*³² who reported that chlortetracycline (a kind of tetracycline antibiotic) resulted in a 28.4% reduction of CO_2 production during batch anaerobic swine manure digestion. Aceticlastic methanogens and hydrogenotrophic methanogens were both inhibited under TC pressure, but inhibition of these organisms showed different effects on CO_2 generation^{50,51}. The inhibition of aceticlastic methanogens resulted in the decreased CO_2 generation but the inhibition of hydrogenotrophic methanogens exerted a positive effect on CO_2 accumulation (reduced CO_2 consumption). Overall, hydrogenotrophic methanogens were less sensitive than aceticlastic methanogens^{52,53} and the accumulation of CO_2 from the inhibited H_2/CO_2 conversion (hydrogenotrophic methanogens) made a smaller to CO_2 accumulation¹³. The process of H_2/CO_2 conversion to acetate

(homoacetogenic bacteria) only occurred under certain conditions similarly played only a small part in CO₂ accumulation¹⁵. As the changes of hydrogenotrophic methanogens and homoacetogenic bacteria groups only modestly affect CO₂ consumption. Therefore, the inhibition of aceticlastic methanogens was the best explanation for the decrease in CO₂ production.

Overall, the TC removal rate was 14.97–67.97% in the reactor. TC had a large negative effect on CH₄ and CO₂ generation, which caused a large decrease of total biogas production. However, the presence of TC apparently had a positive effect on H₂ and VFAs accumulation. All this responses indicated that the methanogenesis process was sensitive to TC presence, but the acidogenesis process was insensitive. This suggests that the presence of TC had less influence on the degradation of organic matter but had a strong influence on CH₄ and CO₂ generation. The reduced CH₄ and CO₂ production is beneficial for emission reduction in anaerobic wastewater treatment, which can alleviate the greenhouse effect and global warming. Additionally, additional electricity can be produced from the additional H₂ and VFAs accumulation, which can help reduce the use of fossil fuels. Also, VFAs can be used as raw materials for production of higher added value fermentation products. Overall, the promoted H₂ and VFAs accumulation can provide higher added values for resource recovery^{54–57}, which is good for energy-saving. Regardless of the inhibition of mechanism, the presence of TC in wastewater provides a new point of view for energy-saving and emission reduction in anaerobic wastewater treatment. Therefore, methods can be used in anaerobic wastewater treatment to avoid the negative effects of TC and benefit from TC's positive effects.

Methods

Bioreactor System. A lab-scale Anaerobic Baffled Reactor (ABR) (455 × 150 × 400 mm, LWH) with a working volume of 21.0 L was employed for the investigation. It was separated into three compartments (named as C1, C2, C3 in sequence) with a volume ratio of 1.5:1:1, and each compartment was further divided into down-flow and up-flow sections, with a volume ratio of 1:3 by vertical baffles. A bottom edge slanted at 45° produced effective mixing and intimate contact between the wastewater and anaerobic sludge. Each compartment was set with two sample outlets (the upper one for water sample collection and the bottom one for sludge sample collection) on the side of up-flow section and one gas collection outlet on the center of the upper section. The reactor operated at 35(±1) °C in a dark environment in a calorstat and the feed was pumped into the reactor by a peristaltic pump. The evolved biogas was collected from the gas collection outlet of each compartment and was daily measured by wet gas meters (Model LML-1, Changchun Filter Co, Ltd).

Seed sludge. The reactor was seeded with anaerobically sewage sludge taken from the anaerobic reactor of Lijiao municipal sewage treatment plant (Guangzhou, China), which applied anaerobic-anoxic-oxic technology to the treatment. It was sieved (0.3 mm) to remove debris and large particles at first, and then introduced into compartments of one third volume of each compartment. The characteristics of inoculated sludge are described as follow: MLSS (g·L⁻¹), 24.67, MLVSS/MLSS (%), 61.33, pH, 6.58, moisture content (%), 97.3%.

After seeding, the reactor was sealed, and the head space above each compartment was flushed with nitrogen gas to remove residual air from the system³⁶.

Reactor started up and operating conditions. The system was started up at a hydraulic retention time of 24 h with an initial influent COD of 500 mg·L⁻¹ and then was increased to 2,000 mg·L⁻¹ stepwise. And the system was fed by synthetic wastewater composed of glucose, ammonium chloride and a number of nutrients and trace elements in order to provide a balanced feed to the reactors. The composition of synthetic wastewater was as follows (in g·L⁻¹): Glucose, 2; NH₄Cl, 0.032; KH₂PO₄, 0.1316, FeSO₄·7H₂O, 0.014, MgSO₄, 0.248. Additionally, trace elements solution were used 1 milliliter per litre of synthetic wastewater, the composition of trace elements solution were as follows (in mg·L⁻¹): CaCl₂·2H₂O, 330, CoCl₂·6H₂O, 240, MnCl₂·4H₂O, 990, NH₄MoO₄·4H₂O, 9, NiCl₂·6H₂O, 190, EDTA, 5000, H₃BO₃, 14, ZnSO₄·7H₂O, 430, CuSO₄·5H₂O, 250³⁵. NaHCO₃ was added to make an influent pH value of 7.5 ± 0.1. During an initial start-up period of 56 days, the ABR got stabilized. After stabilization, the reactor was operated in the synthetic wastewater in the presence and absence of TC for 90 days, respectively.

Analytical methods. The reactor was monitored daily for total biogas generation, COD (chemical oxygen demand). Gas compositions (H₂, CH₄, CO₂), volatile fatty acids (VFAs), MLSS (mixed liquor suspended solids) were measured every 6 days, and the soluble TC concentration were measured every 3 days.

Total biogas generation was measured by the wet gas meter (Model LML-1, Changchun Filter Co, Ltd). COD, and MLSS were determined according to the Standard Methods⁵⁸.

Biogas compositions (H₂, CH₄, CO₂) and VFAs were analyzed by a gas chromatograph (Agilent Technologies 7820 A, USA) equipped with a thermal conductivity detector (TCD) and a flame ionization detector (FID). Biogas compositions (H₂, CH₄, CO₂) were determined by the thermal conductivity detector (TCD) equipped with stainless steel column (2 m × 3.2 mm) packed with TDX-01 (80/100 mesh)⁵⁹, the operational temperatures of injector, oven and detector were kept at 100, 100, and 200 °C, respectively. N₂ was used as a carrier gas at a flow rate of 35 mL/min. The sample injection volume was 1 mL. Volatile fatty acids (VFAs) were analyzed in the soluble phase by using the flame ionization detector (FID) equipped with a HP-FFAP capillary column (30 m × 0.32 mm internal diameter)⁶⁰. The operational temperatures of injector and detector were kept at 220 °C and 250 °C, respectively. The oven temperature programme started at 90 °C and after 3 min was increased by 20 °C/min to 120 °C and then held for 6 min. N₂ was used as a carrier gas at a flow rate of 40 mL/min. The sample injection volume was 1 μL.

SPE (Oasis HLB cartridge, 500 mg, 6 mL, Waters, Milford, MA) and HPLC-MS/MS (Agilent 1200 Series, Agilent QQQ 6410, USA) were used to analyze soluble concentrations of TC. An Agilent XDB-C18 analytical column (2.1 × 150 mm, 3.5 μm) was used, and the column temperature was 23 °C. Solvents B and C were acetonitrile

and 0.2% formic acid in nanopure water, and the flow rate was 0.4 mL/min. The percentage of solvent B and C were 15% and 85%, respectively. The sample injection volume was 3 μ L. TC were ionized in the positive ionization mode and analyzed with the following parameters: capillary voltage 4000 V; nebulizer pressure 35 psi; drying gas, N₂, 8 L/min; gas temperature 350 °C.

Statistical analysis. Average and standard deviation values were calculated according to standard procedures. Two-way analysis of variance (ANOVA), i.e. Duncan's multiple range test (DMRT) and T-test, were used to compare mean values and to assess the significance of the differences between mean values. All statistical analyses were carried out using the SPSS statistical software, version 19.0.

References

- Hao, X., Liu, R. & Huang, X. Evaluation of the potential for operating carbon neutral WWTPs in China. *Water Res.* **87**, 424–431 (2015).
- USEPA. Wastewater Management Fact Sheet: Energy Conservation. Office of Water. (2006). Available at: <http://www.docin.com/p-513193224.html>. (Accessed: 4th November 2015).
- Shafiee, S. & Topal, E. When will fossil fuel reserves be diminished? *Energ Policy* **37**, 181–189 (2009).
- Wang, K. & Liu Y. N. Prospect of China's energy conservation and emission reduction during the remaining years of the 12th Five-Year Plan period. *International Journal of Global Energy Issues* **39**, 18–34 (2016).
- Tauseef, S. M., Abbasi, T. & Abbasi, S. A. Energy recovery from wastewaters with high-rate anaerobic digesters. *Renew. Sust. Energ. Rev.* **19**, 704–741 (2013).
- McCarty, P. L., Bae, J. & Kim, J. Domestic wastewater treatment as a net energy producer—can this be achieved? *Environ Sci Technol.* **45**, 7100–7106 (2011).
- Zang, Y. *et al.* Towards more accurate life cycle assessment of biological wastewater treatment plants: a review. *Journal of Cleaner Production* **107**, 676–692 (2015).
- Kim, H., Kim, J. & Shin, S. G. Continuous fermentation of food waste leachate for the production of volatile fatty acids and potential as a denitrification carbon source. *Bioresour. Technol.* **207**, 440–445 (2016).
- Liu, H., Cheng, S. & Logan, B. E. Production of electricity from acetate or butyrate using a single-chamber microbial fuel cell. *Environ Sci Technol.* **39**, 658–662 (2005).
- Min, B. & Logan, B. E. Continuous electricity generation from domestic wastewater and organic substrates in a flat plate microbial fuel cell. *Environ Sci Technol.* **38**, 5809–5814 (2004).
- De Gioannis, G., Muntoni, A., Poletti, A. & Pomi, R. A review of dark fermentative hydrogen production from biodegradable municipal waste fractions. *Waste Manag* **33**, 1345–1361 (2013).
- Ismail, I., Hassan, M. A., Rahman, N. A. A. & Soon, C. S. Thermophilic biohydrogen production from palm oil mill effluent (POME) using suspended mixed culture. *Biomass Bioenergy* **34**, 42–47 (2010).
- Kim, D. H., Lee, M. K., Jung, K. W. & Kim, M. S. Alkali-treated sewage sludge as a seeding source for hydrogen fermentation of food waste leachate. *Int. J. Hydrogen Energy* **38**, 15751–15756 (2013).
- Sydney, E. B. *et al.* Economic process to produce biohydrogen and volatile fatty acids by a mixed culture using vinasse from sugarcane ethanol industry as nutrient source. *Bioresour. Technol.* **159**, 5140–5144 (2014).
- Demirel, B. & Scherer, P. The roles of acetotrophic and hydrogenotrophic methanogens during anaerobic conversion of biomass to methane: a review. *Rev. Environ. Sci. Bio/Technol* **7**, 173–190 (2008).
- Chynoweth D. P., Owens J. M. & Legrand R. Renewable methane from anaerobic digestion of biomass. *Renew Energy* **22**, 1–8 (2001).
- IPCC (Intergovernmental Panel on Climate Change). Climate change 2007: working group III: mitigation of climate change. IPCC, Paris (2007).
- Abbasi, T., Tauseef S. M. & Abbasi S. A. Anaerobic digestion for global warming control and energy generation—An overview. *Renew. Sust. Energ. Rev.* **16**, 3228–3242 (2012).
- Galagan, J. E. *et al.* The genome of *M. acetivorans* reveals extensive metabolic and physiological diversity. *Genome Res.* **12**, 532–542 (2002).
- Royer, D. L., Berner R. A. & Park J. Climate sensitivity constrained by CO₂ concentrations over the past 420 million years. *Nature* **446**, 530–532 (2007).
- Huang H. The Significance and prospects of water treatment technology in sewage processing. *China New Technologies and Products* **08**, 57 (2011) (in Chinese).
- Kümmerer, K. Antibiotics in the aquatic environment – a Review – Part I. *Chemosphere* **75**, 417–434 (2009).
- Marathe, N. P. *et al.* A treatment plant receiving waste water from multiple bulk drug manufacturers is a reservoir for highly multi-drug resistant integron-bearing bacteria. *PLoS One* **8**, e77310 (2013).
- Watkinson, A. J., Murby, E. J. & Costanzo, S. D. Removal of antibiotics in conventional and advanced wastewater treatment: implications for environmental discharge and wastewater recycling. *Water Res.* **41**, 4164–4176 (2007).
- Cetecioglu, Z. *et al.* Chronic impact of tetracycline on the biodegradation of an organic substrate mixture under anaerobic conditions. *Water Res.* **47**, 2959–2969 (2013).
- Li, B. & Zhang, T. Biodegradation and adsorption of antibiotics in the activated sludge process. *Environ Sci Technol.* **44**, 3468–3473 (2010).
- Michael, I. *et al.* Urban wastewater treatment plants as hotspots for the release of antibiotics in the environment: a review. *Water Res.* **47**, 957–995 (2013).
- Verlicchi, P., Al Aukidy, M. & Zambello, E. Occurrence of pharmaceutical compounds in urban wastewater: removal, mass load and environmental risk after a secondary treatment—a review. *Sci Total Environ.* **429**, 123–155 (2012).
- Li, B. & Zhang T. Mass flows and removal of antibiotics in two municipal wastewater treatment plants. *Chemosphere* **83**, 1284–1289 (2011).
- Le-Minh, N., Khan, S. J., Drewes, J. E. & Stuetz, R. M. Fate of antibiotics during municipal water recycling treatment processes. *Water Res.* **44**, 4295–4323 (2010).
- Kim, S. *et al.* Removal of antibiotics in wastewater: effect of hydraulic and solid retention times on the fate of tetracycline in the activated sludge process. *Environ Sci Technol.* **39**, 5816–5823 (2005).
- Prado, N., Ochoa, J. & Amrane, A. Biodegradation and biosorption of tetracycline and tylosin antibiotics in activated sludge system. *Process Biochem.* **44**, 1302–1306 (2009).
- Ban, Q. *et al.* Linking performance with microbial community characteristics in an anaerobic baffled reactor. *Appl Biochem Biotech.* **169**, 1822–1836 (2013).
- Bodkhe, S. Y. A modified anaerobic baffled reactor for municipal wastewater treatment. *J Environ Manage* **90**, 2488–2493 (2009).
- Gopala Krishna, G. V. T., Kumar, P. & Kumar, P. Treatment of low-strength soluble wastewater using an anaerobic baffled reactor (ABR). *J Environ Manage* **90**, 166–176 (2009).

36. Uyanik, S., Sallis, P. J. & Anderson, G. K. The effect of polymer addition on granulation in an anaerobic baffled reactor (ABR). Part I: process performance. *Water Res.* **36**, 933–943 (2002).
37. Barber, W. P. & Stuckey, D. C. The use of the anaerobic baffled reactor (ABR) for wastewater treatment: a review. *Water Res.* **33**, 1559–1578 (1999).
38. Matos, M. *et al.* Influence of tetracycline on the microbial community composition and activity of nitrifying biofilms. *Chemosphere* **117**, 295–302 (2014).
39. Aydin, S. *et al.* Combined effect of erythromycin, tetracycline and sulfamethoxazole on performance of anaerobic sequencing batch reactors. *Bioresour. Technol.* **186**, 207–214 (2015).
40. Karthikeyan, K. G. & Meyer, M. T. Occurrence of antibiotics in wastewater treatment facilities in Wisconsin, USA. *Sci Total Environ.* **361**, 196–207 (2006).
41. Aydin, S. *et al.* Inhibitory effects of antibiotic combinations on syntrophic bacteria, homoacetogens and methanogens. *Chemosphere* **120**, 515–520 (2015).
42. Stone, J. J. *et al.* Effect of antimicrobial compounds tylosin and chlortetracycline during batch anaerobic swine manure digestion. *Water Res.* **43**, 4740–4750 (2009).
43. Aydin, S. *et al.* Use of PCR-DGGE based molecular methods to assessment of microbial diversity during anaerobic treatment of antibiotic combinations. *Bioresour. Technol.* **192**, 735–740 (2015).
44. Aydin, S., Ince, B. & Ince, O. Application of Real-Time PCR to determination of combined effect of antibiotics on Bacteria, Methanogenic Archaea, Archaea in anaerobic sequencing batch reactors. *Water Res.* **76**, 88–98 (2015).
45. Ma, J. *et al.* A simple methodology for rate-limiting step determination for anaerobic digestion of complex substrates and effect of microbial community ratio. *Bioresour. Technol.* **134**, 391–395 (2013).
46. Ince, B. *et al.* Inhibition effect of isopropanol on acetyl-CoA synthetase expression level of acetoclastic methanogen, *Methanosaeta concilii*. *J. Biotechnol.* **156**, 95–99 (2011).
47. Kim, J., Lim, J. & Lee, C. Quantitative real-time PCR approaches for microbial community studies in wastewater treatment systems: applications and considerations. *Biotechnol. Adv.* **31**, 1358–1373 (2013).
48. Masse, D. I. & Droste, R. L. Comprehensive model of anaerobic digestion of swine manure slurry in a sequencing batch reactor. *Water Res.* **34**, 3087–3106 (2000).
49. Sanz, J. L., Rodriguez, N. & Amils, R. The action of antibiotics on the anaerobic digestion process. *Appl Microbiol Biot.* **46**, 587–592 (1996).
50. Yu, Y., Kim, J. & Hwang, S. Use of real-time PCR for group specific quantification of acetoclastic methanogens in anaerobic processes: population dynamics and community structures. *Biotechnol. Bioeng.* **93**, 424–433 (2006).
51. Ozbayram, E. G. *et al.* Acute effects of various antibiotic combinations on acetoclastic methanogenic activity. *Environ. Sci. Pollut. Res.* **22**, 6230–6235 (2014).
52. Leaphart, A. B. & Lovell, C. R. Recovery and analysis of formyltetrahydrofolate synthetase gene sequences from natural populations of acetogenic bacteria. *Appl. Environ. Microbiol.* **67**, 1392–1395 (2001).
53. Xu, K., Liu, H., Du, G., Chen, J. & Real-time, P. C. R. assays targeting formyltetrahydrofolate synthetase gene to enumerate acetogens in natural and engineered environments. *Anaerobe* **15**, 204–213 (2009).
54. Anderson, R. C. *et al.* Effect of oral nitroethane and 2-nitropropanol administration on methane-producing activity and volatile fatty acid production in the ovine rumen. *Bioresour. Technol.* **97**, 2421–2426 (2006).
55. Božić, A. K. *et al.* Effects of the methane-Inhibitors nitrate, nitroethane, lauric acid, Lauricidin and the Hawaiian marine algae *Chaetoceros* on ruminal fermentation in vitro. *Bioresour. Technol.* **100**, 4017–4025 (2009).
56. Xu, K., Liu, H. & Chen, J. Effect of classic methanogenic inhibitors on the quantity and diversity of archaeal community and the reductive homoacetogenic activity during the process of anaerobic sludge digestion. *Bioresour. Technol.* **101**, 2600–2607 (2010).
57. Michael K. R. Production of acetic acid from waste biomass. [Ph.D. Thesis]. Texas A&M University (1998).
58. APHA, USA. Standard Methods for the Examination of Water and Wastewater (twenty first ed.). American Public Health Association/American Water Works Association/Water Environment Federation, Washington, DC (2005).
59. Liu, Q. *et al.* Phosphate enhancing fermentative hydrogen production from substrate with municipal solid waste composting leachate as a nutrient. *Bioresour. Technol.* **190**, 431–437 (2015).
60. Zhang, F. *et al.* Fatty acids production from hydrogen and carbon dioxide by mixed culture in the membrane biofilm reactor. *Water Res.* **47**, 6122–6129 (2013).

Acknowledgements

This work was supported by the National Natural Science Foundation of China, Grant (No. 41071305), Student Research Project of South China University (2015), State Key Laboratory of Pollution Control and Resource Reuse (No. PCRRF14006) and State Key Lab of Subtropical Building Science, South China University of Technology (2014KB13).

Author Contributions

M.L. designed the experiments, carried out the experiments, analyzed the data, and wrote the paper; X.N. analyzed the data, and wrote the paper; W.L. and Z.Y. carried out the experiments; J.Z., J.W., J.Y. and W.Q.W. analyzed the data, and wrote the paper.

Additional Information

Supplementary information accompanies this paper at <http://www.nature.com/srep>

Competing financial interests: The authors declare no competing financial interests.

How to cite this article: Lu, M. *et al.* Biogas generation in anaerobic wastewater treatment under tetracycline antibiotic pressure. *Sci. Rep.* **6**, 28336; doi: 10.1038/srep28336 (2016).



This work is licensed under a Creative Commons Attribution 4.0 International License. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in the credit line; if the material is not included under the Creative Commons license, users will need to obtain permission from the license holder to reproduce the material. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>