

ARTICLE

Open Access

Dirac-vortex topological photonic crystal fibre

Hao Lin^{1,2} and Ling Lu^{1,3}

Abstract

The success of photonic crystal fibres relies largely on the endless variety of two-dimensional photonic crystals in the cross-section. Here, we propose a topological bandgap fibre whose bandgaps along in-plane directions are opened by generalised Kekulé modulation of a Dirac lattice with a vortex phase. Then, the existence of mid-gap defect modes is guaranteed to guide light at the core of this Dirac-vortex fibre, where the number of guiding modes equals the winding number of the spatial vortex. The single-vortex design provides a single-polarisation single-mode for a bandwidth as large as one octave.

Introduction

Topological photonics^{1–3}, initiated with the idea of robust waveguiding, is inspiring novel fibre concepts, such as a one-way fibre inside a magnetic three-dimensional photonic crystal⁴ and a Bragg fibre with nontrivial edge modes⁵. In this article, we introduce the topological photonic crystal fibre (PCF) whose invariant cross-section resembles the recent Dirac-vortex topological cavity⁶ in two-dimensional photonic crystals. Such a topological bound state can be traced back to the Jackiw-Rossi zero mode in the two-dimensional (2D) Dirac equation⁷ and has been realised in honeycomb lattices^{8,9} in a couple of systems^{10–13}. This Dirac-vortex silica fibre can support an *arbitrary* number of nearly degenerate guiding modes by varying the winding number (w) of the spatial vortex. When $w = \pm 1$, the fibre can support a single-polarisation single-mode (SPSM) with a large bandwidth.

The SPSM fibre supports truly one mode, while traditional single-mode fibres and polarisation-maintaining fibres both support two polarisations, either degenerate or nondegenerate, respectively. Such fibre birefringence (dual polarisation) broadens the optical pulses being transmitted, known as polarisation-mode dispersion. To solve this limitation, SPSM fibres have been designed to

separate the degenerate cutoff frequencies by lowering the symmetry of the fibre cross-section, which can be achieved by structural asymmetry or nonuniform stress. This dominant asymmetric approach is applied mostly to the lowest-frequency index-guided fundamental modes (polarisation-degenerate)^{14–19} but also works for the nonfundamental degenerate modes inside a bandgap^{20–22}.

The SPSM bandwidth is very limited due to the amount of asymmetry that can be applied; the best experimental value is $\sim 30\%$ (frequency span over central frequency), which is achieved in a stressed PCF¹⁸ (In integrated waveguides, an SPSM bandwidth over one octave [66.67%] has been demonstrated²³). For example, in Fig. 1a, the SPSM bandwidth is bounded from above by the cutoff frequency of the other polarisation (blue) and bounded from below by the confinement loss, even if this guiding mode (red line) has no cutoff frequency. However, there exists a symmetric approach to an SPSM by operating at a singly degenerate mode inside a bandgap so that the fibre cross-section can remain highly symmetric. Shown in Fig. 1b, this symmetric approach has thus far only been proposed theoretically in a hollow-core Bragg fibre^{24,25}, in which many other guided modes (blue line) can be made much lossier than the TE₀₁ mode (red line). The SPSM bandwidth of this design is even more limited.

The Dirac-vortex fibre is an ideal design for an ultra-broadband SPSM by ensuring singlet mid-gap dispersion inside the bandgap (the symmetric approach), as illustrated in Fig. 1c. Without the topological mechanism of the Dirac-vortex, it is generally difficult to stabilise a

Correspondence: Ling Lu (linglu@iphy.ac.cn)

¹Institute of Physics, Chinese Academy of Sciences/Beijing National Laboratory for Condensed Matter Physics, Beijing 100190, China


²School of Physical Sciences, University of Chinese Academy of Sciences, Beijing 100049, China

Full list of author information is available at the end of the article

© The Author(s) 2020



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

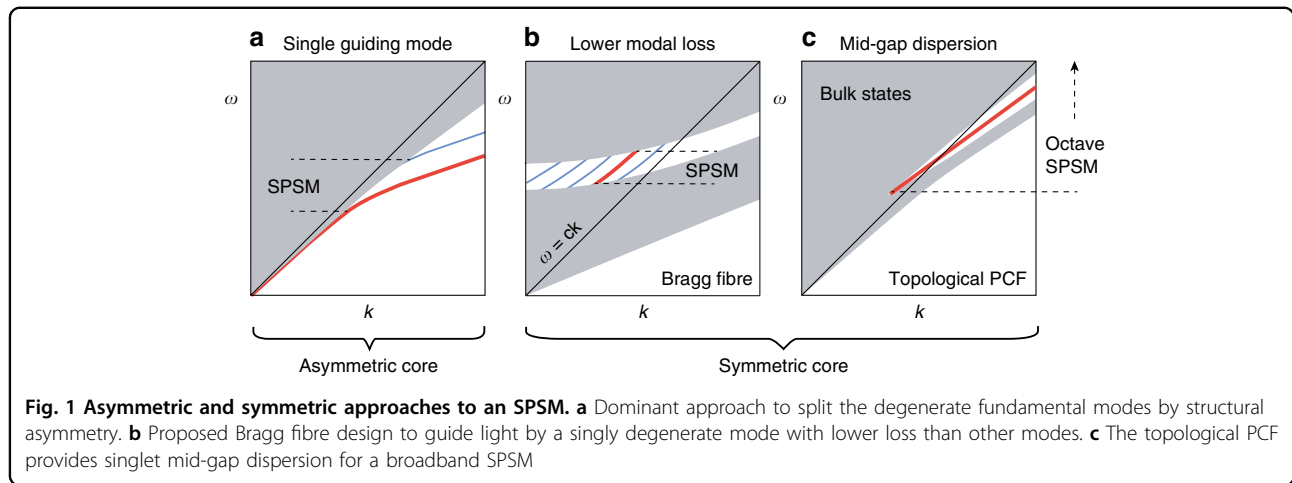

defect mode at the middle of the bandgap for every wave vector.

In the rest of the article, we first show how to gap the nodal-line without leaving residual Weyl points. Such a supercell Kekulé modulation^{6,8} is generalised to continuous 2π phase angles that are used to construct a vortex gap around the fibre core that can confine any number of fibre modes. To ease the fabrication, a simplified design of only four capillary silica tubes is introduced. Finally, we enlarge the vortex size to eliminate the index-guided modes and achieve an octave-spanning SPSM.

Results

Nodal lines and Weyl points in a PCF

We start with the most common PCF structure^{26,27}, a silica photonic crystal with a triangular lattice of air holes, shown in Fig. 2a. There are two nodal lines of 2D Dirac points^{28,29} at the $\pm K$ points in the Brillouin zone. The Dirac points are frequency isolated in the in-plane 2D band structure for $k_z a / 2\pi > 1.6$. Each nodal-line gaps into Weyl points³⁰ if we break the inversion symmetry by adding an extra small air hole in the primitive cell, as shown in Fig. 2b. Since this PCF structure has mirror symmetry along z , the Weyl surface state does not have handedness propagating along the z axis, unlike that observed in coupled spiral waveguide arrays^{31,32} containing similar type-II Weyl points. To gap the entire nodal-line, without leaving Weyl degeneracies, we apply supercell modulations.

Generalised Kekulé modulation

As shown in Fig. 3a–d, we perturb the nodal-line lattice with the generalised Kekulé pattern discussed in ref. ⁶. The idea is to couple the two nodal lines (of Dirac points) together in an enlarged supercell and annihilate them into a bandgap through supercell modulation. Since each supercell has three primitive cells, we label each primitive

cell [Fig. 2a inset] as an artificial “atom” consisting of three struts [Fig. 3a]. In practice, we shift the three “atoms” in the supercell with identical amplitude and constant phase difference (120°) between each two “atoms”. To move each “atom”, we can shift its centre of mass $\delta(\phi)$, in any direction ϕ , by adjusting the thickness of the three struts (t_1, t_2, t_3) without changing the total mass of the “atom” ($\propto 3t_0$). Therefore, the strut thickness for any modulation vector $\delta(\phi)$ can be determined by the following equation:


$$\sum_{i=1}^3 t_i \mathbf{R}_i = \delta(\phi) \sum_{i=1}^3 t_i = \delta(\phi) 3t_0 \quad (1)$$

where \mathbf{R}_i ($|\mathbf{R}_i| = \sqrt{3}/6a$) is the position vector of the centre of mass of each strut. Examples of the lattices before and after the Kekulé modulations are drawn in Fig. 3b1–d1, and their corresponding band structures are plotted in (b2–d2).

After the generalised modulation ($|\delta(\phi)| \neq 0$), the entire nodal lines gap out for arbitrary $\phi \in (0, 2\pi)$, and the bandgaps share a common frequency range, which is eventually determined by the band edges of the two most symmetric supercells of $\phi = 60^\circ$ and 120° . The lattices of the rest of the modulation phases can be understood as interpolations between the two. Note that the modulation phase ϕ of each supercell is labelled by the shift angle of “atom” A1 in Fig. 3c1.

Continuous modulation

As shown in Fig. 3e, we arrange the series of Kekulé-modulated 2D lattices angularly around a chosen core point in the fibre cross-section as a function of their modulation phase ϕ . As a result, a single defect mode appears in the middle of the bandgap and is spatially localised at the fibre core, as shown in Fig. 3f. This result is expected from the Dirac-vortex cavity result⁶ because a PCF can be regarded

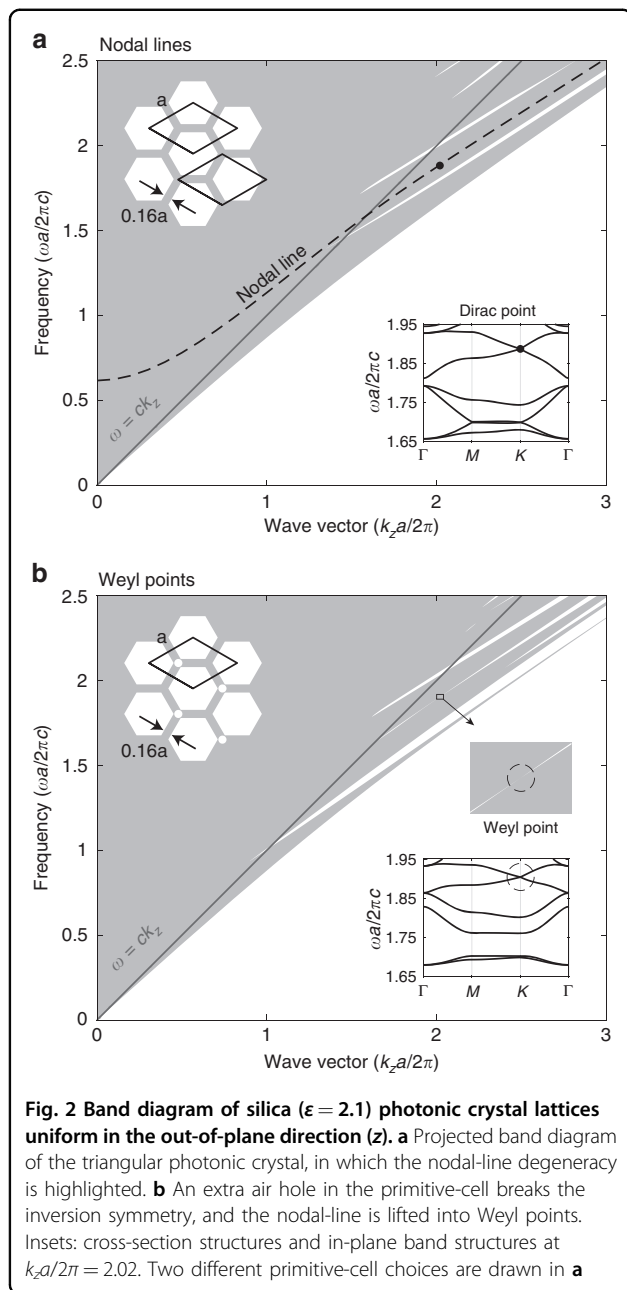

as a 2D cavity for every propagation constant (k_z). Since the fibre is C_{3v} symmetric, one-sixth of the structure is sufficient to study this topological mode.

The large momentum ($k_z a/2\pi > 5$), or short-wavelength, behaviour of the fibre band diagram in Fig. 3f is worth discussion. First, the common bandgap frequency is lower than that of the nodal-line (central dashed line in the figure) at short wavelengths because the short-wavelength modes can localise preferentially at struts that are thicker than t_0 (rather than at those that are thinner) in the modulated lattice, resulting in lowering of the overall band frequencies. Second, the topological mode is very

sensitive to the central three struts, where the modal intensity peaks. In this case, the three central red struts are the thickest, and consequently, the fibre mode cuts off, in the short-wavelength region, at a frequency lower than the bandgap. Third, although we “continuously” vary the modulation angle ϕ in the surrounding lattice, the discretization is still limited to a single strut in our design. A consequence of the strut-discrete vortex is that a set of extra modes is trapped very close to the spectral edges of the bandgap. We call them local-defect modes, shaded in grey colour in the figure. These modes tend to arise at short wavelengths and are more prominent for large modulation amplitudes (large bandgaps), as shown in the example in Fig. 3f. Since these local-defect modes are located near the bulk band edges with an extended mode profile, their confinement losses are at least one order of magnitude higher than that of the guided topological mode with $w = +1$.

Arbitrary degenerate modes

One main topological feature of the Dirac-vortex fibre is the ease of creating multiple near-degenerate modes by simply increasing the winding number (w) of the vortex⁶. We demonstrate this in Fig. 4 for $w = +1, +2, +3$, where w is the topological invariant of the system and can be an arbitrary integer. The sign of w determines where the field peaks around one of the two sublattices of a honeycomb lattice. The two sublattices can be viewed as the two joints, each having three struts, in the primitive cell of Fig. 2a. An example of $w = -1$ is presented in Supplementary Part I.

In these multimode examples, we decrease the modulation amplitude (as well as the bandgap size) to eliminate the local-defect modes in the momentum range plotted. Additionally, we keep the core centre at the C_{3v} centre of the $w = +1$ vortex. If we choose a w -dependent centre, then any vortex can be C_{3v} symmetric, so some pairs of fibre dispersions will be rigorously degenerate due to the doublet representation of the point group.

In principle, a continuous, single-mode or multimode, Dirac-vortex PCF can be fabricated either from three-dimensional (3D)-printed preforms or by the stack-and-draw method with over a hundred tubes with different tube thicknesses. Neither of the two solutions are convenient. Therefore, we present the discrete version of the fibre design.

Discrete modulation with four tubes

We discretize the continuous vortex design [Fig. 3e] into six discrete modulation phase angles (ϕ). Owing to the C_{3v} symmetry of the cross-section, only two phases of the six have distinct structures. The three phases that differ by 120° are actually identical in the unit-cell structure (but with different origins and orientations). As a result, we only need four tubes to stack-and-draw the

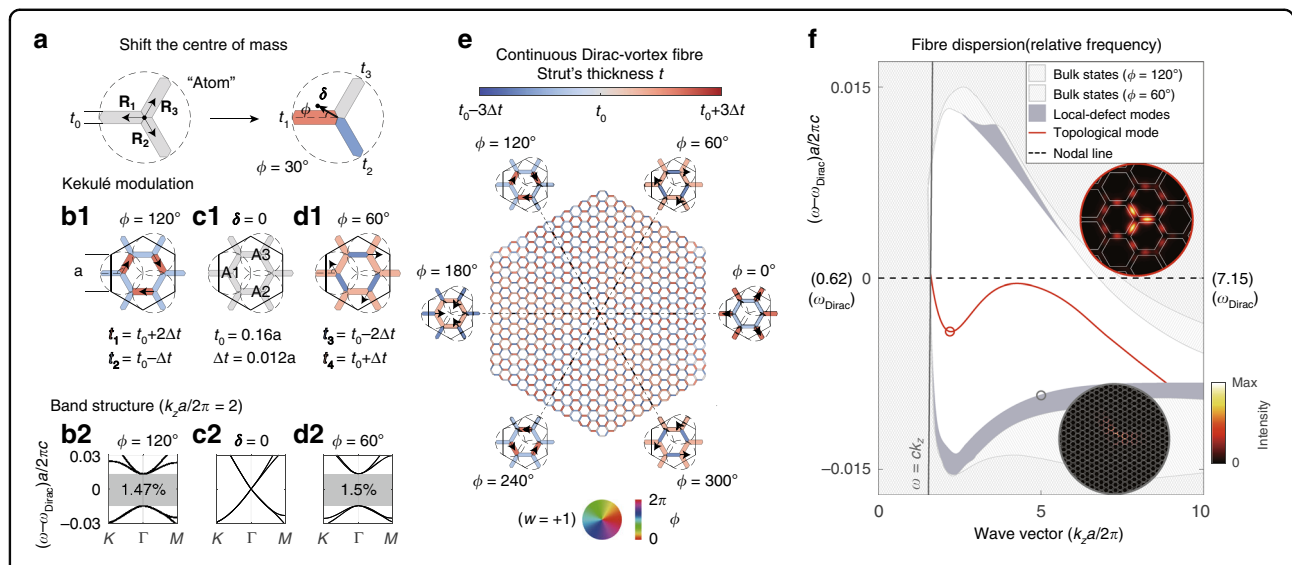


Fig. 3 Dirac-vortex fibre obtained by continuous Kekulé modulations. **a** Example of how an “atom” can be shifted in any direction ($\arg[\delta] = \phi$) with finite amplitude ($|\delta|$) by changing the widths of the three struts. **(b1)**, **(c1)**, **(d1)** Supercell examples of three coordinated atoms (A_1 , A_2 , and A_3) with $|\delta| = \sqrt{3}a/80$, $\phi = 120^\circ$; $|\delta| = 0$; and $|\delta| = \sqrt{3}a/80$, $\phi = 60^\circ$, respectively. $\Delta t = 2\sqrt{3}|\delta|t_0/a = 0.012a$. The corresponding band structures are plotted in **(b2)**, **(c2)**, and **(d2)**, respectively. **e** Structure of a continuous Dirac-vortex PCF, in which every strut is coloured according to its width. **f** Band diagram of the fibre plotted in reference to the frequency of the original nodal-line (central dashed line). The inset shows the intensity patterns ($\hat{\mathbf{z}} \cdot \text{Re}[\mathbf{E}^* \times \mathbf{H}]$) of the topological mode and one local-defect mode. The single-polarisation topological mode (red line) spans over two octaves

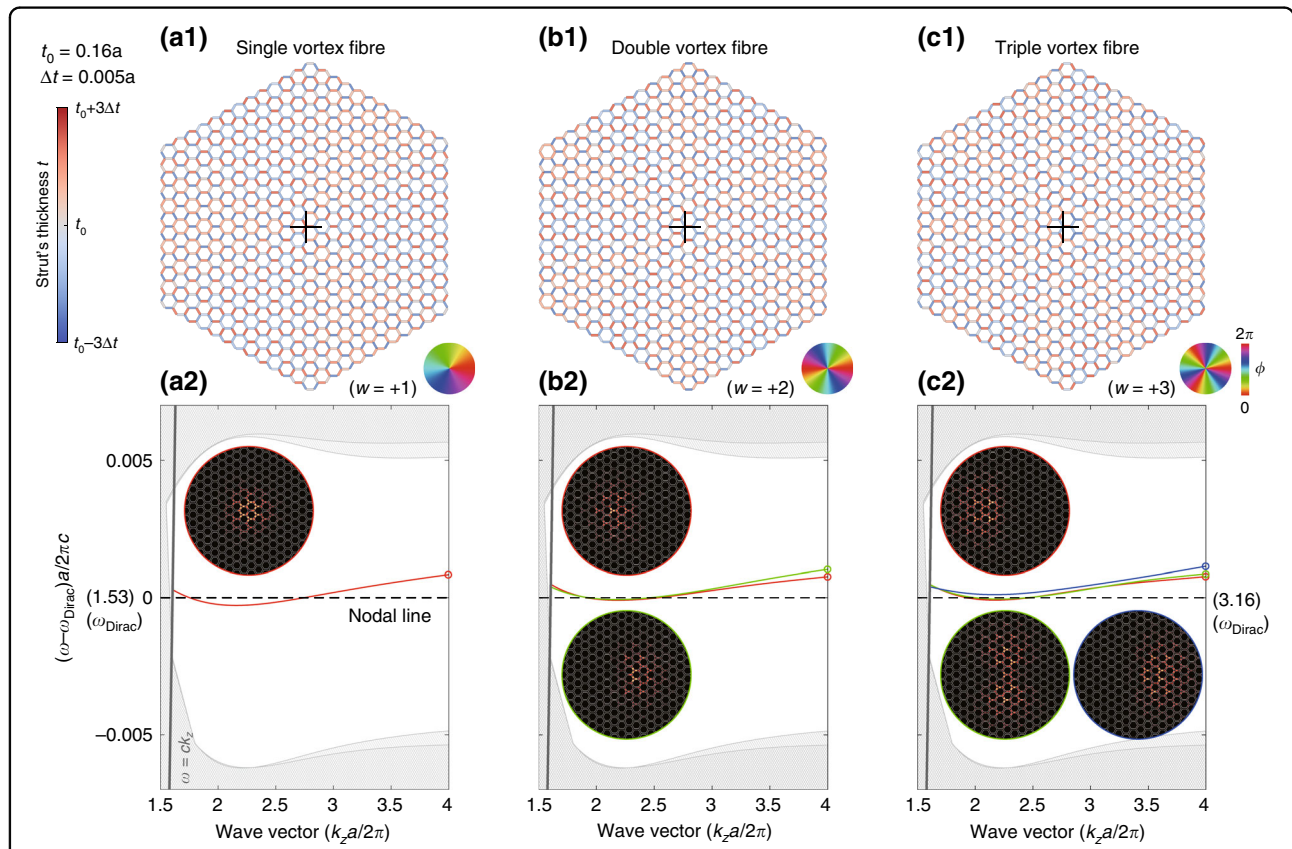


Fig. 4 Continuous Dirac-vortex fibres with winding number $w = +1, +2, +3$. **(a1)**, **(b1)**, and **(c1)** are the fibre structures. The colour wheels show the corresponding phases of the generalised Kekulé modulation. **(a2)**, **(b2)**, and **(c2)** are the corresponding band diagrams, and the insets show the mode profiles ($\hat{\mathbf{z}} \cdot \text{Re}[\mathbf{E}^* \times \mathbf{H}]$) of modes at $k_x a/2\pi = 4$

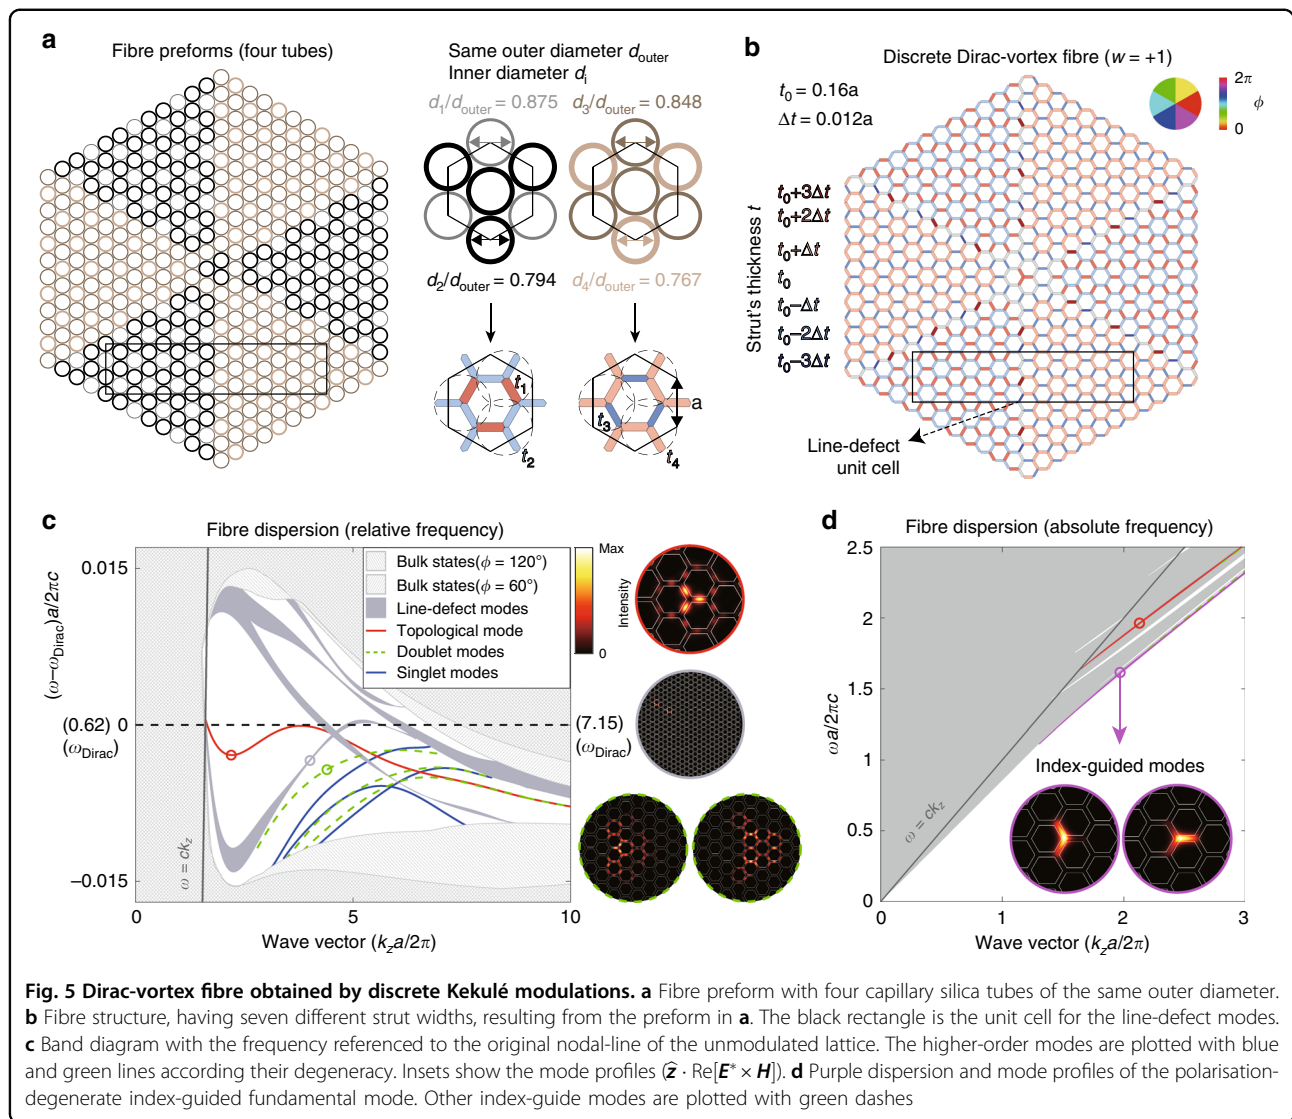


Fig. 5 Dirac-vortex fibre obtained by discrete Kekulé modulations. **a** Fibre preform with four capillary silica tubes of the same outer diameter. **b** Fibre structure, having seven different strut widths, resulting from the preform in **a**. The black rectangle is the unit cell for the line-defect modes. **c** Band diagram with the frequency referenced to the original nodal-line of the unmodulated lattice. The higher-order modes are plotted with blue and green lines according to their degeneracy. Insets show the mode profiles ($\hat{z} \cdot \text{Re}[\mathbf{E}^* \times \mathbf{H}]$). **d** Purple dispersion and mode profiles of the polarisation-degenerate index-guided fundamental mode. Other index-guide modes are plotted with green dashes

Dirac-vortex PCF, which is very reasonable for fabrication. Another discrete version is presented in Supplementary Part II using four strut thicknesses.

As shown in Fig. 5a, the four silica capillary tubes have the same outer diameter d_{outer} to maintain the lattice but different inner diameters d_i for modulation. The four exact ratios of d_i/d_{outer} can be determined from Eq. 2, satisfying the thickness and area proportionality.

$$\begin{cases} \frac{d_{\text{outer}} - (d_{1,4} + d_{2,3})/2}{t_{2,4}} = \frac{d_{\text{outer}} - d_{2,3}}{t_{1,3}} \\ \frac{\pi(3d_{\text{outer}}^2 - d_{1,4}^2 - 2d_{2,3}^2)}{4d_{\text{outer}}^2} = \frac{3\sqrt{3}t_0(a-t_0/2)}{a^2} \end{cases} \quad (2)$$

The resulting discrete Dirac-vortex fibre and its band structure are plotted in Fig. 5b, c. Compared to the continuous version in Fig. 3e, f, the structural nonuniformity

now only exists at the six identical interfaces (also determined by Eq. 2) between the two distinct lattices³³, at which the extra defect modes can locate. In addition to these line-defect modes inside the bandgap, there are also higher-order vortex modes plotted in green and blue lines, according to their C_{3v} point group representations. The mode profiles of the higher-order modes are much larger than that of the topological mode.

We have been focusing on the modes inside the bandgap. However, as shown in Fig. 5d [also in Fig. 3e, f], there could also be index-guided modes in the Dirac-vortex fibre whose frequency is the lowest for a common wave vector. Index-guided modes exist wherever there is a sharp local maximum of the strut thickness, equivalent to a local rise of the effective refractive index. The loss of the index-guided modes is usually much lower than that of the in-gap modes.

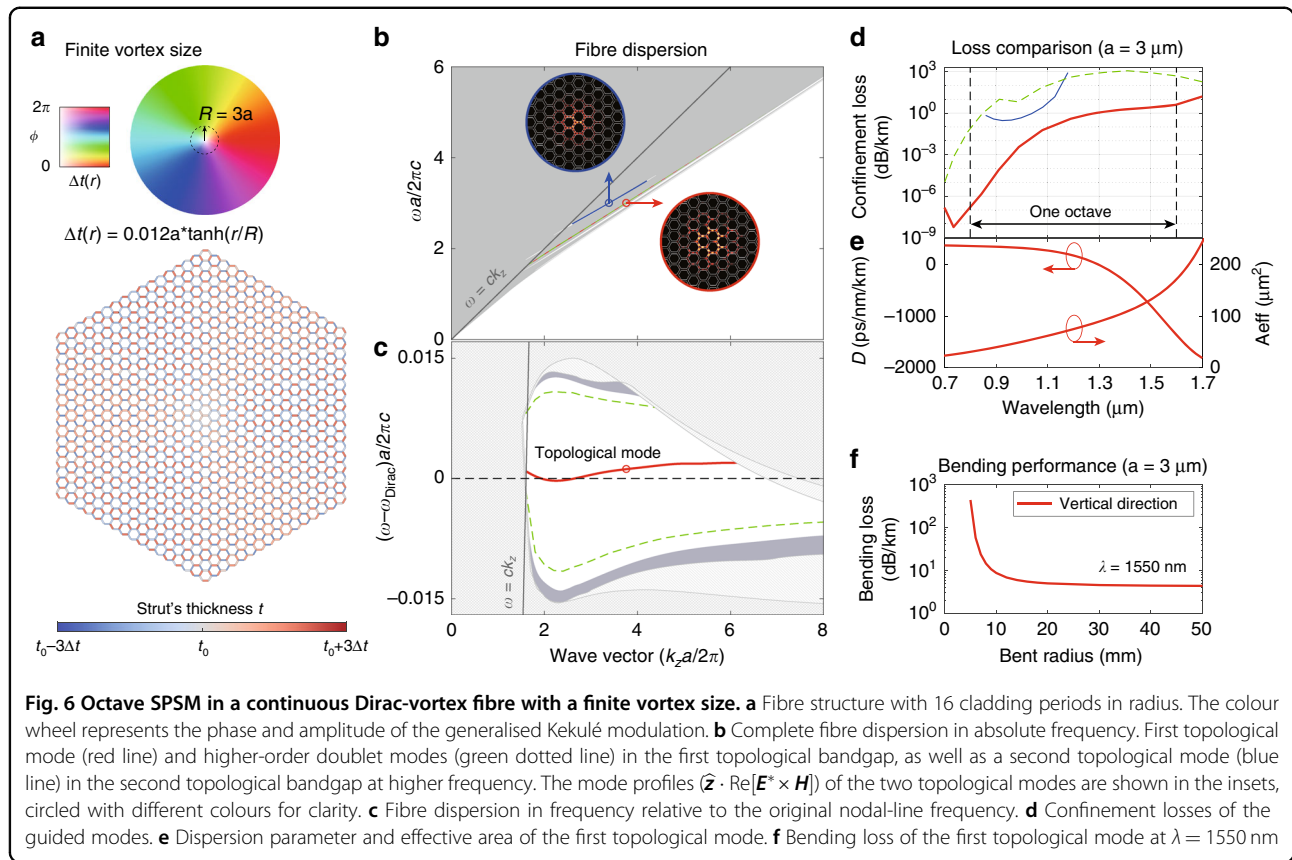


Fig. 6 Octave SPSM in a continuous Dirac-vortex fibre with a finite vortex size. **a** Fibre structure with 16 cladding periods in radius. The colour wheel represents the phase and amplitude of the generalised Kekulé modulation. **b** Complete fibre dispersion in absolute frequency. First topological mode (red line) and higher-order doublet modes (green dotted line) in the first topological bandgap, as well as a second topological mode (blue line) in the second topological bandgap at higher frequency. The mode profiles ($\hat{\mathbf{z}} \cdot \text{Re}[\mathbf{E}^* \times \mathbf{H}]$) of the two topological modes are shown in the insets, circled with different colours for clarity. **c** Fibre dispersion in frequency relative to the original nodal-line frequency. **d** Confinement losses of the guided modes. **e** Dispersion parameter and effective area of the first topological mode. **f** Bending loss of the first topological mode at $\lambda = 1550$ nm

Nonzero vortex size with continuous modulation

To operate at the topological mid-gap dispersion, we have to remove the index-guided modes in the design. We do this by enlarging the vortex size and smoothing the sharp lattice (strut) interfaces at the fibre core. The smooth modulation envelope function is $\Delta t(r) = \tanh(r/R)$, where r is the radial distance and R is the vortex radius of choice, similar to the 2D cavity design in ref. ⁶. Note that in the previous examples of this paper, the vortex size is $R = 0$.

The fibre cross-section with vortex size $R = 3a$ is shown in Fig. 6a, and the corresponding band structure is shown in Fig. 6b, c. There are no index-guided modes at the bottom of the bands. For completeness, we also plot the blue mid-gap dispersion inside the second topological bandgap, originating from a higher frequency Dirac point (nodal-line) illustrated in Supplementary Part III. We did not discuss it in the previous examples because it has a much higher loss than the red mid-gap modes in the first topological gap, as shown in Fig. 6d.

Octave SPSM

The continuously modulated Dirac-vortex PCF with a finite vortex diameter ($2R = 6a$) has an SPSM. We evaluate its potential performance in terms of the confinement loss, dispersion parameter, effective area and bending loss in Fig. 6d–f. We choose the wave vector ($k_z a/2\pi$) range from 1.8 to

5.7 and the period $a = 3 \mu\text{m}$ so that the corresponding wavelength ranges from 1700 nm to 700 nm—the low-loss window of silica.

The modes with the lowest confinement losses are plotted in Fig. 6d, computed with absorbing boundary conditions. The loss of the topological mode (red) is always the lowest for the whole wavelength range over one octave. Most of its confinement loss is less than 1dB/km with sixteen layers of air holes along the fibre radius [Fig. 6a].

The dispersion parameter D of the topological mode can take large negative values of -1500 ps/nm/km, and the zero-dispersion wavelength is $\sim 1.3 \mu\text{m}$. The effective area (A_{eff} defined in ref. ³⁴) is $23 \mu\text{m}^2$ at a $0.7 \mu\text{m}$ wavelength and increases to $243 \mu\text{m}^2$ at a $1.7 \mu\text{m}$ wavelength. The bending loss is calculated using a conformal transformation analysis³⁵ with an equivalent refractive index profile $n_{\text{eq}}(x, y) = n(x, y) \exp(x/X)$ ³⁶ for bending radius X . The results in Fig. 6f show that the fibre can be bent to a radius as small as 15 mm without experiencing significant losses. These specifications of the Dirac-vortex PCF are similar to those of previous PCFs^{37,38}, with the key difference being that the topological mode is a single-polarisation mode.

Discussion

We numerically investigate the Dirac-vortex topological PCF in terms of its principle, construction, and potential

performance. This fibre could be made with the standard stack-and-draw process with silica glass tubes or 3D-printed preforms. The design is tolerant of structural details such as the interface curvatures, not considered in the main text but discussed in Supplementary Part IV. It is also possible to move the topological dispersion above the light line, as discussed in Supplementary Part V.

Similar to the case of a three-dimensional one-way fibre⁴, where the topological invariant is a four-dimensional second Chern number, the topological invariant of the Dirac-vortex PCF can be written as a three-dimensional integral (equation 4.2 in ref.³⁹ under chiral symmetry) where the coordinates are k_x , k_y , and the polar angle (a form of synthetic dimension⁴⁰).

The advantage of the Dirac-vortex PCF over previous fibres is the ability to guide any number of near-degenerate modes at will. The single-mode design provides an SPSM fibre with an octave bandwidth. The effective mode area is easily tuneable by changing the vortex size (R). This work suggests PCFs as a new platform for topological photonics.

We are aware of a relevant work after paper submission⁴¹.

Acknowledgements

We thank Wei Ding, YingYing Wang, Xiaomei Gao, Zhong Wang and Guoqing Chang for helpful discussions. This work was supported by the National Key R&D Programme of China (2017YFA0303800, 2016YFA0302400), the Natural Science Foundation of China (11721404), the Strategic Priority Research Programme (XDB33000000) and the international partnership programme (112111KYSB20200024) of the Chinese Academy of Sciences, and the Beijing Natural Science Foundation (Z200008).

Author details

¹Institute of Physics, Chinese Academy of Sciences/Beijing National Laboratory for Condensed Matter Physics, Beijing 100190, China. ²School of Physical Sciences, University of Chinese Academy of Sciences, Beijing 100049, China. ³Songshan Lake Materials Laboratory, Dongguan, 523808 Guangdong, China

Author contributions

Both authors contributed to the design of the fibre and the writing of the manuscript. H.L. performed the numerical simulations.

Conflict of interest

The authors declare that they have no conflict of interest.

Supplementary information is available for this paper at <https://doi.org/10.1038/s41377-020-00432-2>.

Received: 18 March 2020 Revised: 30 October 2020 Accepted: 11 November 2020

Published online: 22 December 2020

References

- Lu, L., Joannopoulos, J. D. & Soljačić, M. Topological photonics. *Nat. Photon.* **8**, 821–829 (2014).
- Khanikaev, A. B. & Shvets, G. Two-dimensional topological photonics. *Nat. Photon.* **11**, 763–773 (2017).
- Ozawa, T. et al. Topological photonics. *Rev. Mod. Phys.* **91**, 015006 (2019).
- Lu, L., Gao, H. Z. & Wang, Z. Topological one-way fiber of second Chern number. *Nat. Commun.* **9**, 5384 (2018).
- Pillozzi, L. et al. Topological photonic crystal fibers and ring resonators. *Opt. Lett.* **45**, 1415–1418 (2020).
- Gao, X. M. et al. Dirac-vortex topological cavities. *Nat. Nanotechnol.* <https://doi.org/10.1038/s41565-020-0773-7> (2020).
- ackivi, R. & Rossi, P. Zero modes of the vortex-fermion system. *Nucl. Phys. B* **190**, 681–691 (1981).
- Hou, C. Y., Chamon, C. & Mudry, C. Electron fractionalization in two-dimensional graphenelike structures. *Phys. Rev. Lett.* **98**, 186809 (2007).
- ladecola, T., Schuster, T. & Chamon, C. Non-abelian braiding of light. *Phys. Rev. Lett.* **117**, 073901 (2016).
- Menssen, A. J. et al. Photonic topological mode bound to a vortex. *Phys. Rev. Lett.* **125**, 117401 (2020).
- Noh, J. et al. Braiding photonic topological zero modes. *Nat. Phys.* **16**, 989–993 (2020).
- Gao, P. L. et al. Majorana-like zero modes in kekulé distorted sonic lattices. *Phys. Rev. Lett.* **123**, 196601 (2019).
- Chen, C. W. et al. Mechanical analogue of a Majorana bound state. *Adv. Mater.* **31**, 1904386 (2019).
- Okoshi, T. & Oyama, K. Single-polarisation single-mode optical fibre with refractive-index pits on both sides of core. *Electron. Lett.* **16**, 712–713 (1980).
- Eickhoff, W. Stress-induced single-polarization single-mode fiber. *Opt. Lett.* **7**, 629–631 (1982).
- Simpson, J. et al. A single-polarization fiber. *J. Lightwave Technol.* **1**, 370–374 (1983).
- Kubota, H. et al. Absolutely single polarization photonic crystal fiber. *IEEE Photon. Technol. Lett.* **16**, 182–184 (2004).
- Folkenberg, J. R., Nielsen, M. D. & Jakobsen, C. Broadband single-polarization photonic crystal fiber. *Opt. Lett.* **30**, 1446–1448 (2005).
- Lee, K. K. Y., Avniel, Y. & Johnson, S. G. Design strategies and rigorous conditions for single-polarization single-mode waveguides. *Opt. Express* **16**, 15170–15184 (2008).
- Ferrando, A. & Miret, J. J. Single-polarization single-mode intraband guidance in supersquare photonic crystals fibers. *Appl. Phys. Lett.* **78**, 3184–3186 (2001).
- Eguchi, M. & Tsuji, Y. Single-polarization elliptical-hole lattice core photonic-bandgap fiber. *J. Lightwave Technol.* **31**, 177–182 (2013).
- Szpulak, M. et al. Single-polarization single-mode photonic band gap fiber. *Acta Phys. Polonica A* **111**, 239–245 (2007).
- Chiles, J. & Fathpour, S. Demonstration of ultra-broadband single-mode and single-polarization operation in T-guides. *Opt. Lett.* **41**, 3836–3839 (2016).
- Bassett, I. M. & Argyros, A. Elimination of polarization degeneracy in round waveguides. *Opt. Express* **10**, 1342–1346 (2002).
- Argyros, A. et al. Microstructured optical fiber for single-polarization air guidance. *Opt. Lett.* **29**, 20–22 (2004).
- Knight, J. C. Photonic crystal fibres. *Nature* **424**, 847–851 (2003).
- Russell, P. S. J. Photonic-crystal fibers. *J. Lightwave Technol.* **24**, 4729–4749 (2006).
- Xie, K. et al. Fiber guiding at the Dirac frequency beyond photonic bandgaps. *Light: Sci. Appl.* **4**, e304 (2015).
- Biswas, T., Chattopadhyay, R. & Bhadra, S. K. Dirac-mode guidance in silica-based hollow-core photonic crystal fiber with high-index dielectric rings. *Phys. Status Solidi (B)* **253**, 1898–1906 (2016).
- Lu, L. et al. Weyl points and line nodes in gyroid photonic crystals. *Nat. Photon.* **7**, 294–299 (2013).
- Rechtsman, M. C. et al. Photonic floquet topological insulators. *Nature* **496**, 196–200 (2013).
- Noh, J. et al. Experimental observation of optical Weyl points and Fermi arc-like surface states. *Nat. Phys.* **13**, 611–617 (2017).
- Wu, L. H. & Hu, X. Scheme for achieving a topological photonic crystal by using dielectric material. *Phys. Rev. Lett.* **114**, 223901 (2015).
- Joannopoulos, J. D. et al. *Photonic Crystals: Molding the Flow of Light* (Princeton University Press, Princeton, NJ, 2008).
- Heiblum, M. & Harris, J. Analysis of curved optical waveguides by conformal transformation. *IEEE J. Quant. Electron.* **11**, 75–83 (1975).
- Beravat, R. et al. Twist-induced guidance in coreless photonic crystal fiber: a helical channel for light. *Sci. Adv.* **2**, e1601421 (2016).
- Finazzi, V., Monro, T. M. & Richardson, D. J. Small-core silica holey fibers: nonlinearity and confinement loss trade-offs. *J. Optical Soc. Am. B* **20**, 1427–1436 (2003).
- Tsuchida, Y., Saitoh, K. & Koshida, M. Design and characterization of single-mode holey fibers with low bending losses. *Opt. Express* **13**, 4770–4779 (2005).
- Teo, J. C. Y. & Kane, C. L. Topological defects and gapless modes in insulators and superconductors. *Phys. Rev. B* **82**, 115120 (2010).
- Yuan, L. Q. et al. Synthetic dimension in photonics. *Optica* **5**, 1396–1405 (2018).
- Makwana, M. et al. Hybrid topological guiding mechanisms for photonic crystal fibers. *Opt. Express* **28**, 30871–30888 (2020).