COVID-19 infection risk from exposure to aerosols of wastewater treatment plants

Sahar Gholipour [a,1], Farzaneh Mohammadi [a,1], Mahnaz Nikaeen [a,*], Zahra Shamsizadeh [a], Atefeh Khazeni [b], Zohreh Sahbaei [c], Seyed Mohammad Mousavi [c], Mojtaba Ghobadian [c], Hossein Mirhendi [d]

[a] Department of Environmental Health Engineering, School of Health, Isfahan University of Medical Sciences, Isfahan, Iran
[b] Department of Infectious Disease, Vice Chancellery for Health, Isfahan University of Medical Sciences, Isfahan, Iran
[c] Isfahan Water & Wastewater Company, Iran
[d] Department of Medical Parasitology and Mycology, School of Medicine, Isfahan University of Medical Sciences, Isfahan, Iran

HIGHLIGHTS

- SARS-CoV-2 presence in wastewater raises the question regarding the transmission via wastewater.
- SARS-CoV-2 was detected in wastewater aerosols at pumping station and activated sludge plants.
- There was a relatively high risk of COVID-19 for wastewater workers through wastewater aerosols.
- Role of wastewater in SARS-CoV-2 transmission is limited by knowledge gaps about its viability.
- Molecular detection along with cell culture is needed to validate infectivity of the SARS-CoV-2.

GRAPHICAL ABSTRACT
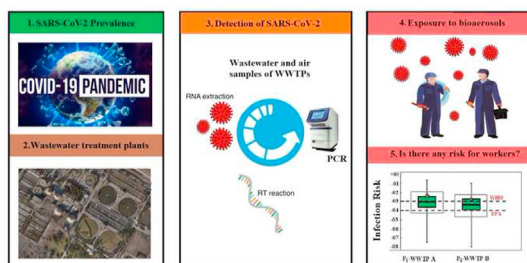
ARTICLE INFO

ABSTRACT

Fecal shedding of SARS-CoV-2 from COVID-19 patients and presence of the viral RNA in wastewater have extensively been reported. Some wastewater treatment plant (WWTP) processes generate aerosols which have the potential to transmit pathogenic microorganisms and present a health risk for exposed individuals. We analyzed the presence of viral RNA of SARS-CoV-2 in raw wastewater and air samples of WWTPs. The risk that may arise from exposure to virus-contaminated aerosols of wastewater was estimated by developing a quantitative microbial risk analysis (QMRA) method. SARS-CoV-2 was detected in 9 of 24 (37.5%) wastewater samples with a concentration about 10^4 genomic copies L^{-1}. The viral RNA was also detected in 40% (6/15) of air samples. QMRA analysis showed a relatively high risk of SARS-CoV-2 infection for wastewater workers via exposure to the viral aerosols. The estimated annual infection risk ranged from 1.1×10^{-2} to 2.3×10^{-2} per person per year (PPPY) for wastewater workers which was higher than the reference level recommended by WHO (10^{-3} pppy). However, due to the lack

* Corresponding author.
E-mail address: nikaeen@hlth.mui.ac.ir (M. Nikaeen).
[1] Sahar Gholipour and Farzaneh Mohammadi equally contributed to this research.

Fig. 1. Maps of the study region and the location of WWTPs.

Table 1
Characteristics of the wastewater treatment plants (WWTPs).

WWTP	Served population	Capacity (m³ y⁻¹)	Treatment process	Potential points of bioaerosol generation
South of Isfahan (WWTP A)	790,000	45,990,000	Activated Sludge	Pumping station, Aerated grit chamber, Aeration tank
North of Isfahan (WWTP B)	980,000	83,950,000	Activated Sludge	Pumping station, Aerated grit chamber, Aeration tank

instructions. RNA was also extracted by application of TRIzol (Invitrogen).

Isolated RNA was used as a template for one-step reverse transcription quantitative polymerase chain reaction (RT-qPCR). Real-time PCR was performed using specific primers (F: 5′-TGTTAAAC-CAGGTGGAAC-3'; R: 5′-CTGTGTTGTAGATTGCG-3′) targeting RNA-dependent RNA polymerase (*RdRp*) gene of SARS-CoV to detect the presence of SARS-CoV-2. A 25 μL reaction contained 12.5 μL of 2 X reaction mix, 0.25 μL RT enzyme mix (QuantiTect RT-PCR, QIA-GEN), 0.6 μM of each primer, 5 mM MgCl₂, 0.25 mg mL⁻¹ BSA and 8 μL template RNA. The cycling parameters were as RT at 50 °C for 30 min, followed by 95 °C for 15 min and then 45 cycles at 95 °C for 15 s, 57 °C for 30 s in a StepOne real-time PCR system (Applied Biosystems™, USA). Each run included a positive control (RNA from patients hospitalized with COVID-19) and negative control. A melting curve analysis was performed after the PCR run to differentiate between actual products and primer dimmers, and to eliminate the possibility of false-positive results. A novel coronavirus (2019-nCoV) detection kit was also used for detecting the *ORF-1ab* and *N* genes of SARS-CoV-2 (Sansure Biotech, China) according to the manufacturer's instructions.

2.2.1. Quantification of SARS-CoV-2

SARS-CoV-2 RNA was quantified by plotting the quantification cycles (Cq) against of a 10-fold serial dilution of a quantified plasmid. RNA of SARS-CoV-2 was amplified by RT-PCR and then used for DNA cloning. Plasmids containing the SARS-CoV-2 insert were purified using High Pure Plasmid Isolation Kit (Roche, Germany), quantified and a ten-fold serial dilution was prepared. The limit of detection (LOD) resulted as 10 genomic copies per reaction.

2.3. Quantitative microbial risk assessment

Wastewater is containing pathogenic microorganisms such as viruses which could be aerosolized during wastewater treatment processes. In the study, a QMRA model was used to assess the risk of infection associated with inhalation of SARS-CoV-2 contaminated aerosols/droplets produced from wastewater treatment processes.

2.3.1. Hazard identification

Sewage workers may expose to pathogenic microorganisms from biological aerosols produced during wastewater treatment processes. Exposure to SARS-CoV-2 aerosols/droplets in WWTPs could pose a health risk for workers (Corpuz et al., 2020; Kitajima et al., 2020). Different stages of COVID-19 outbreak, in terms of percentage of infected population, can affect the concentration of viral particles in wastewater, aerosols emitted from WWTPs, and consequently estimated risk. Therefore, it may be better to use the human fecal shedding method for estimating SARS-CoV-2 concentrations in wastewater as recommended by Barker (2014); and Zaneti et al. (2021).

2.3.2. Exposure assessment

Aerosols are generated by some units at WWTPs such as pumping station and aeration tanks. High fractions of the aerosols have diameters ≤10 μ (88% of produced aerosols are less than 4 μ in diameter), which are considered respirable, could be deposited in the respiratory tract, and may reach the alveolar region of the lungs (USEPA, 2011).

The daily dose (TCID$_{50}$ d^{-1}) of SARS-CoV-2 aerosols inhaled by the WWTP workers is given by (Barker, 2014):

$$d = C_W PC_{wa} IR\ t_{exp}\ RR \tag{1}$$

where C$_w$ is the concentration of SARS-CoV-2 in wastewater (TCID$_{50}$ L^{-1}); PC$_{wa}$ is the microbial water-to-air partitioning coefficient (L m^{-3}); IR is the average inhalation rate (m^3 h^{-1}); t$_{exp}$ is the daily exposure duration (h) which was considered 8 h for occupational exposure, and RR is the aerosol retention rate in the lungs which is calculated by equation (2) (Schoen and Ashbolt, 2011):

$$RR = f_i^1 f_i^2 \tag{2}$$

Here, f$_i^1$ is the fraction of aerosols of size range i, and f$_i^2$ is the fraction of the aerosols of size range i that are deposited in the lower respiratory tract (Schoen and Ashbolt, 2011). We assumed that WWTPs could generate inhalable-size aerosols (smaller than 10 μm) which may carry the virus.

For C$_{w,}$ we used the best available data to estimate densities of infectious SARS-CoV-2 in the wastewater. The concentration of SARS-CoV-2 in wastewater is estimated by equation (3) (Barker, 2014).

$$C_W = \frac{P_i\ PR\ Sh_d\ Sh_c\ F}{dt\ Q\ CF\ 1000} \tag{3}$$

where P$_i$ is the cumulative number of COVID-19 cases over a 46-day period (from February 20 to April 06, 2020). The first wave of infection in the study region was started to increase since the end of February 2020, reached a maximum on the 6th of April, 2020, and then has slowly decreased (Fig. 2).

Since gastrointestinal symptoms and subsequently virus excretion have been reported for some patients, PR is the percent of individuals with fecal shedding of SARS-CoV-2.

Sh$_d$ and Sh$_c$ are shedding duration (d) and shedding rate of SARS-CoV-2 (copy g^{-1}) in feces of infected patients, respectively. Recent reports have revealed that some of COVID-19 patients have gastrointestinal symptoms for various durations of time from 1 to
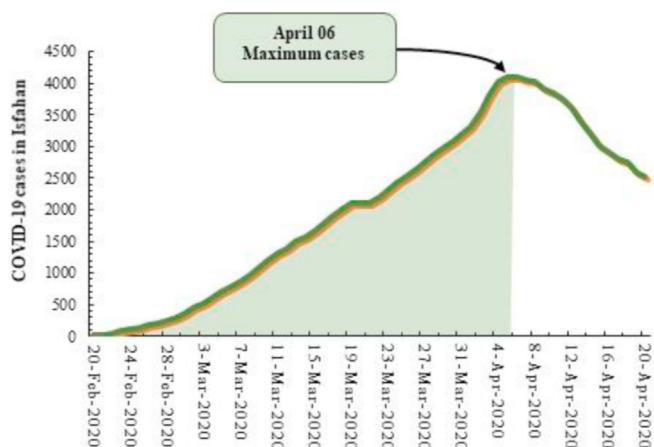
Fig. 2. Daily COVID-19 cases in the region of study from February 20-April 06, 2020.

39 days, and SARS-CoV-2 RNA load could be as high as 10^8 copies per gram of fecal sample (Kitajima et al., 2020). F is the daily fecal production by infected patients (g feces per person per day), Q is the flow rate of WWTP (m^3 d^{-1}) and CF is the conversion factor of genomic copy number to TCID$_{50}$ and dt is 46 days.

No pathogen decay was considered during aerosolization or transport through air to a receptor.

2.3.3. Dose-response model and risk characterization

By the dose-response model, the probability of infection is estimated due to the inhaled dose. Because of the structural similarities of SARS-CoV-2 with SARS-CoV and human coronavirus and the lack of a dose-response model for SARS-CoV-2 we used exponential dose-response models which have been suggested by Watanabe et al. (2010) for human coronavirus (229E) (Eq. (4)) and SARS-CoV (Eq. (5)).

$$P_i(d) = 1 - e^{-k_{ill}d} \tag{4}$$

$$P_i(d) = 1 - e^{-k_{death}\ d} \tag{5}$$

P$_i$(d) is the risk of infection per daily exposure of sewage workers to aerosols/droplets of SARS-CoV-2, d is the daily dose (TCID$_{50}$ d^{-1}); and k is the model parameter which has been considered as 5.39×10^{-2} and 2.46×10^{-3} with illness and death as endpoints of response for equations of 4 & 5, respectively (Watanabe et al., 2010).

The annual risk of SARS-CoV-2 infection per person (P$_i$(A)) is estimated by equation (6) (Moazeni et al., 2017).

$$P_i(A) = 1 - [1 - P_i(d)]^n \tag{6}$$

where n is the frequency of exposure (the number of days per year on which a worker may be exposed to SARS-CoV-2 aerosols). We considered 20 working days per each month and an exposure period of 12 months (one year).

2.4. Model implementation

The values and statistical distributions of the variable parameters introduced in the study are presented in Table 2. Monte-Carlo simulation technique with 10,000 random sampling from each distribution input was used to run the model to develop a distribution of likely risk and incorporate the uncertainty and variability around each parameter. All modeling and analysis were implemented using RStudio version 1.3.959. Sensitivity analysis was performed using Spearman's rank order correlation to identify those variable input parameters contributing to the uncertainty of estimated infection risk and have the greatest influence on the estimated risk.

Since the concentration of SARS-CoV-2 in wastewater and subsequently in aerosolized wastewater is affected by the extent of COVID-19 outbreak in a community, we presented a mathematical model (Eq. (7)) to predict the annual probability of SARS-CoV-2 infection for WWTP workers based on the number of COVID-19 cases in a community served by a WWTP.

$$P_i(A) = 1 - EXP\left(-3.799\frac{P_i}{Q}\right) \tag{7}$$

All of other parameters in QMRA model were kept to their average value.

Table 2
QMRA model input parameters.

Parameter	Unit	Distribution	Reference
Cumulative cases of COVID-19 served by WWTP A (P_i)	Person	Beta ($\alpha_1 = 0.59204$, $\alpha_2 = 0.75091$)	This study
Cumulative cases of COVID-19 served by WWTP B (P_i)	Person	Beta ($\alpha_1 = 0.59197$, $\alpha_2 = 0.85633$)	This study
Shedding duration (Sh_d)	D	PERT (Min = 1, Mode = 8, Max39)	(Wu et al., 2020)
Shedding rate (Sh_c)	Copies per g feces	Uniform (Min $= 6.3 \times 10^5$, Max $= 1.3 \times 10^8$)	Kitajima et al. (2020)
Daily fecal production (F)	g person^{-1} d^{-1}	Normal (Mean = 243, SD = 130.2)	Rose et al. (2015)
Flow rate of WWTP A (Q)	m^3 d^{-1}	Point (125,544)	This study
Flow rate of WWTP B (Q)	m^3 d^{-1}	Point (229,785)	This study
Conversion factor (CF)	Copies TCID$_{50}^{-1}$	Uniform (Min = 29, Max = 700)	(Kim et al., 2020; Mcbride et al., 2013)
Positive Rate (PR)	Percent	Beta ($\alpha_1 = 2.1173$, $\alpha_2 = 1.8117$)	Kitajima et al. (2020)
Microbial water-to-air partitioning coefficient (PC_{wa})	L m^{-3}	Uniform (Min $= 10^{-4}$, Max $= 10^{-5}$)	This study
Inhalation rate (IR)	m^3 min^{-1}	Point (2.9×10^{-2})	(USEPA, 2011)
Exposure time (t_{exp})	h	Point (8)	(USEPA, 2011)
Parameter for the exponential model; disease as endpoint response (k)		Point (5.39×10^{-2})	Watanabe et al. (2010)
death as endpoint response (k)		Point (2.46×10^{-3})	

3. Results and discussion

3.1. Detection of SARS-CoV-2 in raw wastewater

Monitoring of pathogenic microorganisms in wastewater is a promising approach to understand the prevalence and circulation of the microbial diseases in a community. In the study, we detected SARS-CoV-2 in 9 of 12 (37.5%) wastewater samples. Viral RNA was detected in 5 of 12 and 4 of 12 samples of raw wastewater from WWTP A and B, respectively (Table 3). SARS-CoV-2 was detected in wastewater samples of different countries have been facing COVID-19 epidemic such as Australia, Italy, Netherlands, America, France and India (Ahmed et al., 2020; La Rosa et al., 2020; Medema et al., 2020; Rimoldi et al., 2020; Wu et al., 2020; Wurtzer et al., 2020; Kumar et al., 2020). Results of an investigation in Milan and Rome, Italy showed positive results for SARS-CoV-2 RNA of 50% (6/12) raw wastewater samples (La Rosa et al., 2020). All samples (7 of 7) of pre-treated wastewater from the municipal wastewater treatment plant in Bozeman, Montana were positive for viral RNA of SARS-CoV-2 (Nemudryi et al., 2020). Among the nine untreated wastewater samples tested from urban catchments in Southeast Queensland, Australia, two (22.2%) samples were positive for viral RNA (Ahmed et al., 2020). Wastewater testing has been suggested as a sensitive tool to monitor the status and circulation of the COVID-19 infection in the community (Kitajima et al., 2020; Medema et al., 2020). Screening of SARS-CoV-2 targets in 24 h composite samples of incoming wastewater at different WWTPs in the Netherlands showed no positive sample three weeks before the first COVID-19 case, while 9 of 10 samples were positive 2.5 weeks

after the outbreak (Medema et al., 2020). Therefore, the infection rate in a community could be an important parameter affects the detection frequency and concentration of the virus in wastewater samples. As shown in Fig. 3, lower positive samples from WWTP B may in part be related to the lower prevalence of COVID-19 in the region served by WWTP B. Furthermore, despite the increasing prevalence of COVID-19 over the last days of sampling period (Fig. 3), SARS-CoV-2 was not detected in some samples. No detection of SARS-CoV-2 in the samples may be a consequence of the low recovery of aluminum hydroxide adsorption-precipitation method. In other words, SARS-CoV-2 was detected in samples which were more concentrated by PEG. Randazzo et al. (2020) reported a recovery of about 10% for influent samples by aluminum hydroxide adsorption-precipitation method which was tested by spiking of the samples with mengovirus (MgV).

We detected SARS-CoV-2 in a concentration of about $2-4 \times 10^4$ genomic copies (GC) per liter. In consistent with our results, Medema et al. (2020) detected SARS-CoV-2 in concentrations of $2.6-30$ GC mL^{-1} in wastewater samples of Netherlands. Viral concentrations of $4-5$ and more than 6 log10 GC L^{-1} have been reported in wastewaters of Massachusetts and France, respectively

Table 3
Detected genes of SARS-CoV-2 in positive wastewater samples.

Sampling site/Sample	Detected gene		
	RdRp	ORF-1ab	N
WWTP A			
1	+	−	−
2	+	−	−
3	+	−	−
4	+	−	−
5	−	+	+
WWTP B			
1	+	−	−
2	+	−	+
3	+	−	−
4	+	−	−
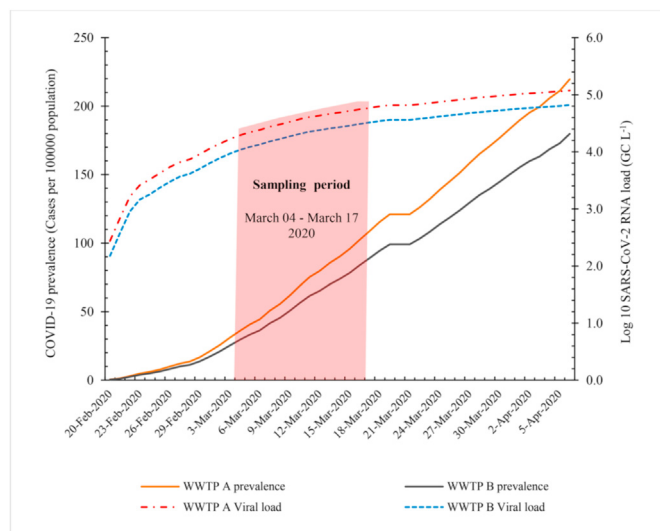
Fig. 3. Cumulative prevalence of COVID-19 in regions served by WWTPs, and SARS-CoV-2 concentration in raw wastewater (C_w) as estimated by QMRA model during the study period.

(Randazzo et al., 2020; Wu et al., 2020; Wurtzer et al., 2020). However, in Ahmed et al. (2020) study, among the nine wastewater samples tested, two (22.2%) samples were reported positive with a concentration of 12 and 1.9 copies per 100 mL of untreated wastewater. In consistent with previous studies, we observed discrepancy among different target genes for detection of SARS-CoV-2 (Table 3) in wastewater samples which may in part be related to the analytical sensitivity among the assays (Medema et al., 2020; Randazzo et al., 2020). As presented in Table 3, *RdRp* gene was the most frequently detected gene in our samples (8 of 9 positive samples). *N* and *ORF-1ab* genes were detected in 2 and 1 samples, respectively. In study of Rimoldi et al. (2020), *ORF-1ab* gene showed the highest frequency of positivity, while both the other two genes (*N* and *E*) failed to be amplified in two out of five positive samples of water and wastewater. Detection of SARS-CoV-2 in wastewater samples in Italy by *RdRp* gene showed a higher sensitivity compared to the assay targeting the spiked gene (La Rosa et al., 2020).

We found relatively consistent result for the viral load in WWTPs as quantified by the real-time PCR assay with which was calculated by the QMRA model (C_w) (Fig. 3). However, some authors have reported much higher concentrations of the viral RNA in wastewater than the confirmed cases of COVID-19 in the community (Randazzo et al., 2020; Wu et al., 2020).

3.2. Detection of SARS-CoV-2 in wastewater aerosols

Aerosols produced by some operations or processes in WWTPs have the ability to carry pathogenic microorganisms (Kitajima et al., 2020). However, very few studies have investigated the presence and concentrations of airborne viruses in WWTPs (Kitajima et al., 2020; Corpuz et al., 2020). Our results revealed the detection of SARS-CoV-2 RNA in 40% (6/15) of air samples of WWTP A when prevalence of COVID-19 was very high in the region. SARS-CoV-2 RNA was detected in a range of 5−188 GC L^{-1} of air with the highest concentration at pumping station. Masclaux et al. (2014) reported a high frequency of detection of adenovirus in air samples (100% of summer samples and 97% of winter samples) of a WWTP. They reported that the highest airborne concentration of adenovirus was 2.27×10^6 genome equivalent m^{-3}. However, they detected norovirus in only 3 of the 123 air samples. In another study, 56% (9/16) of air samples from a WWTP in Japan were positive for norovirus (NV) GII. Adenoviruses (4/16), NV GI (6/16), FRNA bacteriophages GIII (3/16), and enteroviruses (3/16) were also detected, but at lower frequencies (Matsubara and Katayama, 2019).

3.3. Risk of COVID-19 infection for wastewater workers

Presence of SARS-CoV-2 RNA in wastewater samples and wastewater aerosols could pose a health concern for WWTPs workers.

The results of this study showed a median infection risk (with illness as endpoint of response, Eq. (4)) of 2.3×10^{-2} (95% CI: $1.65 \times 10^{-3} - 4.9 \times 10^{-1}$) and 1.1×10^{-2} (95% CI: 8×10^{-4} - 2.9×10^{-1}) per person per year (pppy) for workers of WWTP A and B, respectively. Fig. 4 compares the levels of estimated infection risk with the 10^{-4} and 10^{-3} pppy reference levels proposed by EPA (EPA, 2011) and WHO (Mara et al., 2007), respectively. As shown in Fig. 4, the estimated annual infection risk of SARS-CoV-2 for wastewater workers was about 1 log higher than the WHO guideline threshold of 10^{-3} pppy. The estimated risk was also higher than the tolerable infection risk of 5.5×10^{-4} pppy has been recommended by Zaneti et al. (2021) for SARS-CoV-2.

The results showed a higher infection risk for workers of WWTP

A which is related to the higher prevalence of COVID-19 in the region served by WWTP A (Fig. 3). Study of Zaneti et al. (2021) showed an infection risk of SARS-CoV-2 from 2.6×10^{-3} to 1.3×10^{-2} from accidental ingestion of sewage by WWTP workers while performing routine activities. They reported that the estimated risk was above the tolerable infection risk for SARS-CoV-2 of 5.5×10^{-4} pppy, thus reinforcing the concern about wastewater as a potential source of COVID-19 transmission. A QMRA analysis showed a high infection risk from adenoviruses for wastewater workers from exposure to bioaerosols from influent and biological oxidation tanks for >3 min exposure time (Carducci et al., 2018). Pepper and Gerba (2018) reported an infection risk of greater than 10^{-4} for exposure to spray irrigation of reclaimed water when the number of *Legionella* in the water exceeded 1000 colony forming units (CFU) per mL.

As shown in Fig. 4, risk assessment analysis by equation (5) with death as endpoint of response, showed lower risk of SARS-CoV-2 for workers from exposure to wastewater aerosols.

We assumed that the load of SARS-CoV-2 genomes in wastewater correlated with the number of symptomatic patients with a mean fecal shedding duration of 11.89 days and shedding rates from 6.3×10^5 to 1.3×10^8 RNA copies per gram (Table 2). Some studies have reported the detection of SARS-CoV-2 in fecal samples of non-symptomatic individuals as well as lower shedding rate about 10^2 -10^3 RNA copies per gram of fecal matter of symptomatic patients (Kitajima et al., 2020). It has been reported that viral RNA could be detected in the feces of 81.8% COVID-19 cases even with a negative throat swab result (Ling et al., 2020). In an investigation, shedding of SARS-CoV-2 in a cluster of 9 cases was 10^7 RNA copies g^{-1} feces one week after symptom onset which decreased to the 10^3 RNA copies g^{-1} three weeks after symptom onset (Medema et al., 2020). Therefore, due to the lack of sufficient information about this emerging pathogen, the estimated risk may be over- or underestimated.

3.4. Sensitivity analysis

Sensitivity analysis was performed to determine the influence of variation in the input parameters on the estimated infection risk. As expected, the sensitivity analysis suggested that the infection risk of SARS-CoV-2 is greatly affected by the number of cases of COVID-19 in the population (Pi) (Fig. 5). However, the mathematical model developed in the study (Eq. (7)), can be readily used to predict the effect of variation of COVID-19 prevalence on the probability of infection risk. Our sensitivity analysis showed that conversion factor (CF) of genomic copies to TCID$_{50}$ is also an important factor affects the infection risk (Fig. 5). Although it has been reported that coronaviruses may remain infectious in water and sewage for days (Qu et al., 2020), no accurate data is available for conversion of genomic copy numbers of SARS-CoV-2 to TCID$_{50}$ in aquatic environments. Therefore, we used a wide range of CF from 29 (Kim et al., 2020) to 700 (Mcbride et al., 2013) based on the available data. Zaneti et al. (2021) considered a conversion factor of 1000 for estimation of risk of SARS-CoV-2 associated with the accidental ingestion of sewage by WWTPs workers. Shedding rate (Sh$_c$) and duration (Sh$_d$) of SARS-CoV-2 are other important influential factors which were positively correlated with the infection risk of SARS-CoV-2. These two parameters along with Pi affect the viral load or concentration of SARS-CoV-2 in wastewater. Other studies have also reported that the pathogen numbers in wastewater are among the most important variables correlated to the resultant risk from exposure to wastewater (Carducci et al., 2018; Farhadkhani et al., 2018; Moazeni et al., 2017). *Legionella* concentration was identified as the most important parameter affects the health risk from exposure to *Legionella*-contaminated aerosols in reclaimed
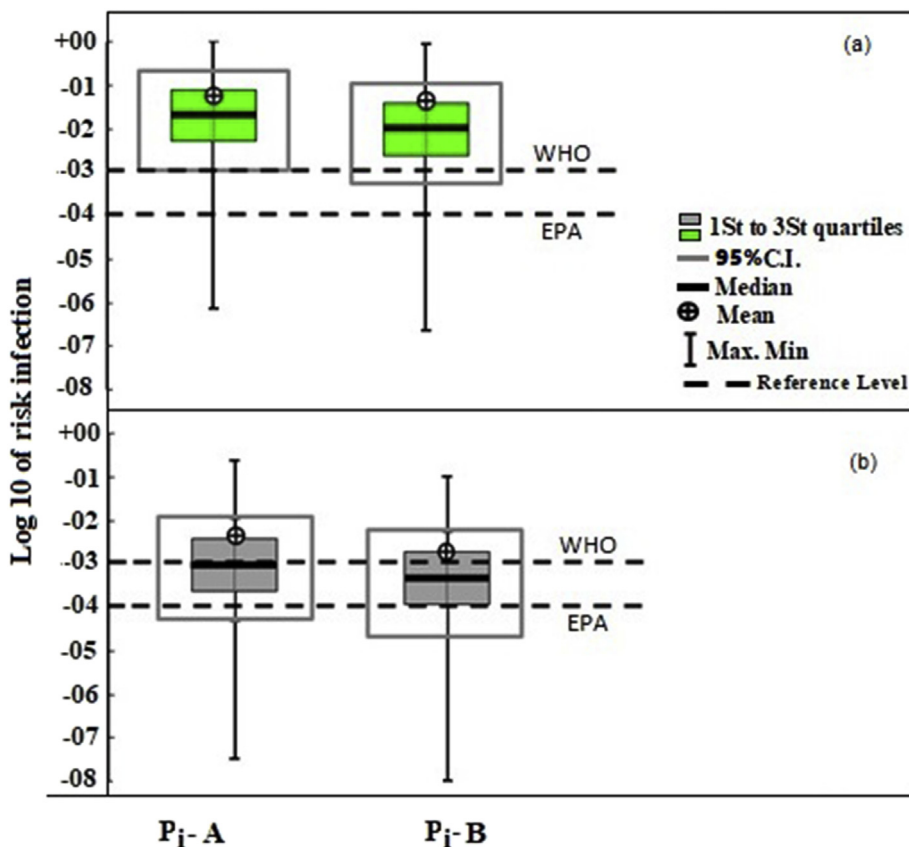
Fig. 4. The box plots of estimated infection risk (pppy) for workers of WWTP A (P_i-A) and WWTP B (P_i-B) in comparison to 10^{-4} and 10^{-3} pppy reference levels, with considering (a) illness as endpoint response and (b) death as endpoint response.
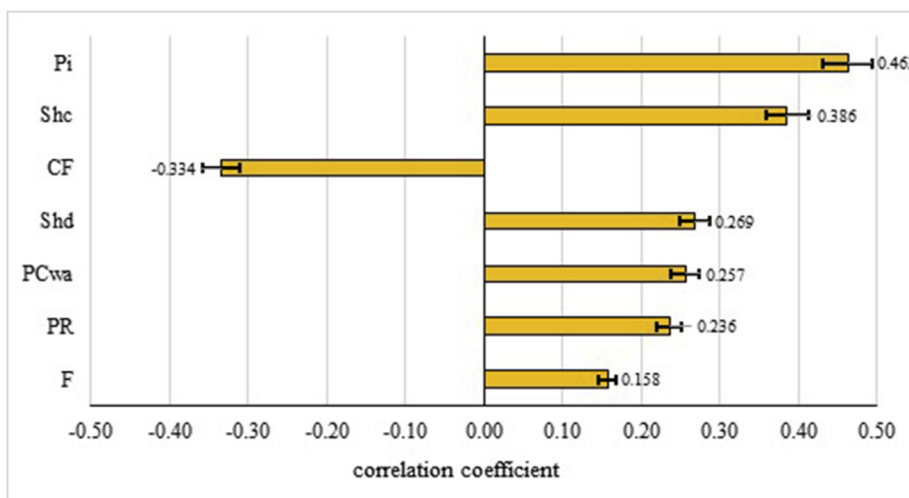
Fig. 5. Tornado chart for the median estimates of the Spearman's rank correlation between the input variables and the risk of infection, bounded by the 95% uncertainty.

water (Hamilton et al., 2018).

The partitioning coefficient (PC_{wa}), a function of the aerosolization efficiency, was identified as another important factor affects the infection risk (Fig. 5). In consistent with our results, Hamilton et al. (2018) reported that aerosol partitioning is an influential factor in health risk from exposure to *Legionella*-contaminated aerosols in reclaimed water (Hamilton et al., 2018). We assumed a PC_{wa} of 10^{-4} - 10^{-5} L m^{-3} based on the analyzed

concentrations of SARS-CoV-2 RNA in air samples of WWTP to the predicted concentration in wastewater. Estimated PC_{wa} was one order of magnitude greater than values recommended for estimating bacterial transfer, in particular *legionella*, from air-to-water (Bauer et al., 2002; Chattopadhyay et al., 2017). However, the estimation of bioaerosol concentrations generated in WWTPs exhibits very high uncertainty for microbial pathogens (USEPA, 2011). Type and surface properties of pathogenic microorganisms and

wastewater quality could affect the water-to-air partitioning coefficient of pathogens (Chattopadhyay et al., 2017). On the other hand, bioaerosolized viral particles may considerably dilute by air currents or inactivated by environmental factors. Pyankov et al. (2018) reported that the decay of airborne MERS-CoV virus is much higher for hot and dry air conditions, with only 4.7% survival over 60 min. However, we assumed no dilution or loss for viral particles which may overestimate the infection risk of COVID-19.

3.5. Limitations and further research needs

Although our findings suggest that wastewater may contribute to COVID-19 transmission, the estimated risk for wastewater workers still presents significant challenges due to the knowledge gaps about this emerging pathogen.

The lack of a dose-response model for SARS-CoV-2 is a critical limitation for conducting QMRA for this pathogen (Kitajima et al., 2020; Corpuz et al., 2020). In other words, the number of viral particles which is required to cause an infection differs among viral pathogens and it is not now clear for SARS-CoV-2 (Kitajima et al., 2020). In a QMRA study on adenovirus 40/41, a dose-response relationship for adenovirus type 4 was used and assumed that all adenoviruses display the same as adenovirus type 4 (Kundu et al., 2013). However, additional research is necessary to develop a dose-response relationship for SARS-CoV-2 based on the epidemiological studies.

Although in a recent study it was reported that SARS-CoV-2 aerosols could maintain their infectivity for up to 16 h (Fears et al., 2020), detection of SARS-CoV-2 RNA in wastewater and wastewater aerosols dose not necessarily indicate viability and infectivity of the viral particles (Foladori et al., 2020). In other words, the lack of data on the environmental stability of SARS-CoV-2 and its viability and fate in wastewater is a major uncertainty affects the potential risk of exposure to wastewater aerosols. Most researches are based on the molecular detection of SARS-CoV-2 which do not indicate the presence of infectious virus (Corpuz et al., 2020). Therefore, more researches are needed to perform molecular detection of SARS-CoV-2 along with cell culture isolation to validate infectivity of the virus and role of wastewater in transmission of COVID-19.

Furthermore, our bioaerosol information for driving water-to-air partitioning coefficient (PC_{wa}) of viral particles is very limited. This highlights the importance of further research to develop more accurate data for estimating viral emission from wastewater to air.

Further improvements in information about the fecal shedding rate and duration of SARS-CoV-2 in infected patients are also necessary to reduce uncertainties associated with the risk outcome.

3.6. Risk management strategies and recommendations

As the COVID-19 pandemic continues, preventive measures must be taken everywhere there is a potential risk for transmission of the viral particles. To reduce the potential of COVID-19 infection incidence among WWTP workers, processes which produce bioaerosols should be covered, and workers should be encouraged to use protective wears. As outlined by WHO, workers should wear appropriate personal protective equipment (PPE), which includes protective outerwear, gloves, goggles or a face shield and a mask. It is recommended that wastewater workers wear N95 respirator which is very efficient for filtration of airborne particles such as bioaerosols. They should perform hand hygiene frequently; and they should avoid touching eyes, nose, and mouth with unwashed hands (WHO, 2020b). On the other hand, a reduction in working hours and consequently exposure time decreases the infection risk of SARS-CoV-2 for WWTPs workers.

4. Conclusion

Our results showed the detection of SARS-CoV-2 in wastewater samples as a result of COVID-19 outbreak. Detection of SARS-CoV-2 in air samples of WWTP demonstrated that wastewater aerosols may contribute to the transmission of COVID-19. QMRA analysis showed a relatively high risk of SARS-CoV-2 infection for wastewater workers through exposure to bioaerosols from WWTP. The risk assessment model developed in this study can be a useful tool for health services to predict the likely risk of SARS-CoV-2 from aquatic environments. However, the finding of this study provides the first data of risk analysis of SARS-CoV-2 associated with the exposure to bioaerosols and its future development could be very useful in risk management of SARS-CoV-2. In other words, the ongoing COVID-19 outbreak and its potential transmission through environments underscore the need to obtain more reliable information on the survival and fate of SARS-CoV-2 in wastewater. Epidemiological evidence is also required to validate the COVID-19 transmission through wastewater aerosols.

Author statement

Sahar Gholipour: Methodology, Investigation; Farzaneh Mohammadi: Software, Formal analysis; Mahnaz nikaeen: Conceptualization, Supervision, Writing − review & editing Zahra shamsizadeh: Inestigation; Atefeh Khazeni: Resources. Zohreh Sahbaei: Resources; Seyed Mohammad Mousavi: Resources; Mojtaba Ghobadian: Resources; Hossein Mirhendi: Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgment

References

Ahmed, W., Angel, N., Edson, J., Bibby, K., Bivins, A., O'Brien, J.W., Choi, P.M., Kitajima, M., Simpson, S.L., Li, J., Tscharke, B., Verhagen, R., Smith, W.J.M., Zaugg, J., Dierens, L., Hugenholtz, P., Thomas, K.V., Mueller, J.F., 2020. First confirmed detection of SARS-CoV-2 in untreated wastewater in Australia: a proof of concept for the wastewater surveillance of COVID-19 in the community. Sci. Total Environ. 728, 138764.

APHA, 2012. Standard Methods for the Examination of Water and Wastewater. American Public Health Association.

Barker, S.F., 2014. Risk of norovirus gastroenteritis from consumption of vegetables irrigated with highly treated municipal wastewater-evaluation of methods to estimate sewage quality. Risk Anal. 34, 803−817.

Bauer, H., Fuerhacker, M., Zibuschka, F., Schmid, H., Puxbaum, H., 2002. Bacteria and fungi in aerosols generated by two different types of wastewater treatment plants. Water Res. 36, 3965−3970.

Carducci, A., Donzelli, G., Cioni, L., Federigi, I., Lombardi, R., Verani, M., 2018. Quantitative microbial risk assessment for workers exposed to bioaerosol in wastewater treatment plants aimed at the choice and setup of safety measures. Int. J. Environ. Res. Publ. Health 15.

Chattopadhyay, S., Perkins, S.D., Shaw, M., Nichols, T.L., 2017. Evaluation of exposure of brevundimonas diminuta and Pseudomonas aeruginosa during showering. J. Aerosol Sci. 114, 77−93.

Corpuz, M.V.A., Buonerba, A., Vigliotta, G., Zarra, T., Ballesteros, F., Campiglia, P., Belgiorno, V., Korshin, G., Naddeo, V., 2020. Viruses in wastewater: occurrence, abundance and detection methods. Sci. Total Environ. 745, 140910.

El Baz, S., Imziln, B., 2020. Can aerosols and wastewater be considered as potential transmissional sources of COVID-19 to humans? Eur. J. Environ. Public Heal. 4, em0047.

Farhadkhani, M., Nikaeen, M., Yadegarfar, G., Hatamzadeh, M., Pourmohammadbagher, H., Sahbaei, Z., Rahmani, H.R., 2018. Effects of irrigation with secondary treated wastewater on physicochemical and microbial properties of soil and produce safety in a semi-arid area. Water Res. 144, 356–364.

Fears, A.C., Klimstra, W.B., Duprex, P., Hartman, A., Weaver, S.C., Plante, K.S., Mirchandani, D., Plante, J.A., Aguilar, P.V., Fernández, D., Nalca, A., Totura, A., Dyer, D., Kearney, M., Lackemeyer, M., Bohannon, J.K., Johnson, R., Garry, R.F., Reed, D.S., Roy, C.J., 2020. Persistence of severe acute respiratory syndrome coronavirus 2 in aerosol suspensions. Emerg. Infect. Dis. 26, 2168–2171.

Foladori, P., Cutrupi, F., Segata, N., Manara, S., Pinto, F., Malpei, F., Bruni, L., La Rosa, G., 2020. SARS-CoV-2 from faeces to wastewater treatment: what do we know? A review. Sci. Total Environ. 743, 140444.

Gormley, M., Aspray, T.J., Kelly, D.A., 2020. COVID-19: mitigating transmission via wastewater plumbing systems. Lancet Glob. Heal. 8, e643.

Gwenzi, W., 2021. Leaving no stone unturned in light of the COVID-19 faecal-oral hypothesis? A water, sanitation and hygiene (WASH) perspective targeting low-income countries. Sci. Total Environ. 753, 141751.

Hamilton, K.A., Hamilton, M.T., Johnson, W., Jjemba, P., Bukhari, Z., Lechevallier, M., Haas, C.N., 2018. Health risks from exposure to Legionella in reclaimed water aerosols : toilet fl ushing , spray irrigation , and cooling towers. Water Res. 134, 261–279.

Kampf, G., Todt, D., Pfaender, S., Steinmann, E., 2020. Persistence of coronaviruses on inanimate surfaces and their inactivation with biocidal agents. J. Hosp. Infect. 104, 246–251.

Kim, Y.-I., Kim, S.-G., Kim, S.-M., Kim, E.-H., Park, S.-J., Yu, K.-M., Chang, J.-H., Kim, E.J., Lee, S., Casel, M.A.B., Um, J., Song, M.-S., Jeong, H.W., Lai, V.D., Kim, Y., Chin, B.S., Park, J.-S., Chung, K.-H., Foo, S.-S., Poo, H., Mo, I.-P., Lee, O.-J., Webby, R.J., Jung, J.U., Choi, Y.K., 2020. Infection and rapid transmission of SARS-CoV-2 in ferrets. Cell Host Microbe 27, 704–709 e2.

Kitajima, M., Ahmed, W., Bibby, K., Carducci, A., Gerba, C.P., Hamilton, K.A., Haramoto, E., Rose, J.B., 2020. SARS-CoV-2 in wastewater: state of the knowledge and research needs. Sci. Total Environ. 739, 139076.

Kumar, M., Patel, A.K., Shah, A.V., Raval, J., Rajpara, N., Joshi, M., Joshi, C.G., 2020. First proof of the capability of wastewater surveillance for COVID-19 in India through detection of genetic material of SARS-CoV-2. Sci. Total Environ. 746, 141326.

Kundu, A., McBride, G., Wuertz, S., 2013. Adenovirus-associated health risks for recreational activities in a multi-use coastal watershed based on site-specific quantitative microbial risk assessment. Water Res. 47, 6309–6325.

La Rosa, G., Iaconelli, M., Mancini, P., Bonanno Ferraro, G., Veneri, C., Bonadonna, L., Lucentini, L., Suffredini, E., 2020. First detection of SARS-CoV-2 in untreated wastewaters in Italy. Sci. Total Environ. 736, 139652.

Ling, Y., Xu, S.-B., Lin, Y.-X., Tian, D., Zhu, Z.-Q., Dai, F.-H., Wu, F., Song, Z.-G., Huang, W., Chen, J., Hu, B.-J., Wang, S., Mao, E.-Q., Zhu, L., Zhang, W.-H., Lu, H.-Z., 2020. Persistence and clearance of viral RNA in 2019 novel coronavirus disease rehabilitation patients. Chin. Med. J. (Engl). 133, 1039–1043.

Lodder, W., de Roda Husman, A.M., 2020. SARS-CoV-2 in wastewater: potential health risk, but also data source. Lancet Gastroenterol. Hepatol. 5, 533–534.

Mara, D.D., Sleigh, P.A., Blumenthal, U.J., Carr, R.M., 2007. Health risks in wastewater irrigation : comparing estimates from quantitative microbial risk analyses and epidemiological studies. J. Water Health 39–50.

Masclaux, F.G., Hotz, P., Gashi, D., Savova-Bianchi, D., Oppliger, A., 2014. Assessment of airborne virus contamination in wastewater treatment plants. Environ. Res. 133, 260–265.

Matsubara, K., Katayama, H., 2019. Development of a portable detection method for enteric viruses from ambient air and its application to a wastewater treatment plant. Pathogens 8.

Mcbride, G.B., Stott, R., Miller, W., Bambic, D., 2013. Discharge-based QMRA for estimation of public health risks from exposure to stormwater- borne pathogens in recreational waters in the United States. Water Res. 47, 5282–5297.

McKinney, K.R., Gong, Y.Y., Lewis, T.G., 2006. Environmental transmission of SARS at Amoy Gardens. J. Environ. Health 68, 22–26.

Medema, G., Heijnen, L., Elsinga, G., Italiaander, R., Brouwer, A., 2020. Presence of SARS-coronavirus-2 RNA in sewage and correlation with reported COVID-19 prevalence in the early stage of the epidemic in The Netherlands. Environ. Sci. Technol. Lett. 7, 511–516.

Moazeni, M., Nikaeen, M., Hadi, M., Moghim, S., Mouhebat, L., Hatamzadeh, M., Hassanzadeh, A., 2017. Estimation of health risks caused by exposure to enteroviruses from agricultural application of wastewater effluents. Water Res. 125, 104–113.

Nemudryi, A., Nemudraia, A., Wiegand, T., Surya, K., Buyukyoruk, M., Cicha, C., Vanderwood, K.K., Wilkinson, R., Wiedenheft, B., 2020. Temporal detection and phylogenetic assessment of SARS-CoV-2 in municipal wastewater. Cell Reports Med 1, 100098.

Pepper, I.L., Gerba, C.P., 2018. Risk of infection from Legionella associated with spray irrigation of reclaimed water. Water Res. 139, 101–107.

Pyankov, O.V., Bodnev, S.A., Pyankova, O.G., Agranovski, I.E., 2018. Survival of aerosolized coronavirus in the ambient air. J. Aerosol Sci. 115, 158–163.

Qu, G., Li, X., Hu, L., Jiang, G., 2020. An imperative need for research on the role of environmental factors in transmission of novel coronavirus (COVID-19). Environ. Sci. Technol. 54, 3730–3732.

Randazzo, W., Truchado, P., Cuevas-Ferrando, E., Simón, P., Allende, A., Sánchez, G., 2020. SARS-CoV-2 RNA in wastewater anticipated COVID-19 occurrence in a low prevalence area. Water Res. 181, 115942.

Rimoldi, S.G., Stefani, F., Gigantiello, A., Polesello, S., Comandatore, F., Mileto, D., Maresca, M., Longobardi, C., Mancon, A., Romeri, F., 2020. Presence and infectivity of SARS-CoV-2 virus in wastewaters and rivers. Sci. Total Environ. 744, 140911.

Rose, C., Parker, A., Jefferson, B., Cartmell, E., 2015. The characterization of feces and urine: a review of the literature to inform advanced treatment technology. Crit. Rev. Environ. Sci. Technol. 45, 1827–1879.

Schoen, M.E., Ashbolt, N.J., 2011. An in-premise model for Legionella exposure during showering events. Water Res. 45, 5826–5836.

USEPA, 2011. Exposure Factors Handbook 2011 Edition. Final Report, Washington, DC.

Watanabe, T., Bartrand, T.A., Weir, M.H., Omura, T., Haas, C.N., 2010. Development of a dose-response model for SARS coronavirus. Risk Anal. 30, 1129–1138.

WHO, 2020a. Statement on the Second Meeting of the International Health Regulations (2005) Emergency Committee Regarding the Outbreak of Novel Coronavirus (2019-nCoV) (Geneva, Switzerland).

WHO, 2020b. Surface Sampling of Coronavirus Disease (COVID-19): A Practical "How to" Protocol for Health Care and Public Health Professionals, pp. 1–26. COVID-19 WHO Surveilllance, case Investig. Epidemiol. Protoc.

Wu, F., Xiao, A., Zhang, J., Gu, X., Lee, W.L., Kauffman, K., Hanage, W., Matus, M., Ghaeli, N., Endo, N., Duvallet, C., Moniz, K., Erickson, T., Chai, P., Thompson, J., Alm, E., 2020. SARS-CoV-2 titers in wastewater are higher than expected from clinically confirmed cases. Msystems. 5.

Wurtzer, S., Marechal, V., Mouchel, J.M., Maday, Y., Teyssou, R., Richard, E., Almayrac, J.L., Moulin, L., 2020. Evaluation of Lockdown Effect on SARS-CoV-2 Dynamics through Viral Genome Quantification in Waste Water. Greater Paris, France, 5 March to 23 April 2020. Eurosurveillance 25.

Yang, W., Cai, C., Dai, X., 2020. The potential exposure and transmission risk of SARS-CoV-2 through sludge treatment and disposal. Resour. Conserv. Recycl. 162, 105043.

Yeo, C., Kaushal, S., Yeo, D., 2020. Enteric involvement of coronaviruses: is faecal–oral transmission of SARS-CoV-2 possible? Lancet Gastroenterol. Hepatol. 5, 335–337.

Zaneti, R.N., Girardi, V., Spilki, F.R., Mena, K., Westphalen, A.P.C., da Costa Colares, E.R., Pozzebon, A.G., Etchepare, R.G., 2021. Quantitative microbial risk assessment of SARS-CoV-2 for workers in wastewater treatment plants. Sci. Total Environ. 754, 142163.