



Correction

Correction: Fang et al. High-Throughput Preparation of Silk Fibroin Nanofibers by Modified Bubble-Electrospinning. *Nanomaterials* 2018, 8, 471

Yue Fang ^{1,*}, Lan Xu ^{1,*}  and Mingdi Wang ^{2,*}

¹ National Engineering Laboratory for Modern Silk, College of Textile and Engineering, Soochow University, 199 Ren-ai Road, Suzhou 215123, China; yfang5279@stu.suda.edu.cn

² School of Mechanical and Electric Engineering, Soochow University, 178 Ganjiang Road, Suzhou 215021, China

* Correspondence: lanxu@suda.edu.cn (L.X.); wangmingdi@suda.edu.cn (M.W.)

Error in Figure

In the original publication [1], errors were introduced in two pictures (Figure 5(A-2),(A-3)) in Figure 5 during the copyediting stage. Thus, Figure 5 is incorrect. The authors apologize for any inconvenience caused and state that the scientific conclusions are unaffected. This correction was approved by the Academic Editor. The original publication has also been updated with the correct version of Figure 5, which is also included here.



Citation: Fang, Y.; Xu, L.; Wang, M. Correction: Fang et al. High-Throughput Preparation of Silk Fibroin Nanofibers by Modified Bubble-Electrospinning. *Nanomaterials* 2018, 8, 471. *Nanomaterials* 2022, 12, 1880. <https://doi.org/10.3390/nano12111880>

Received: 11 April 2022


Accepted: 24 May 2022

Published: 31 May 2022



Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

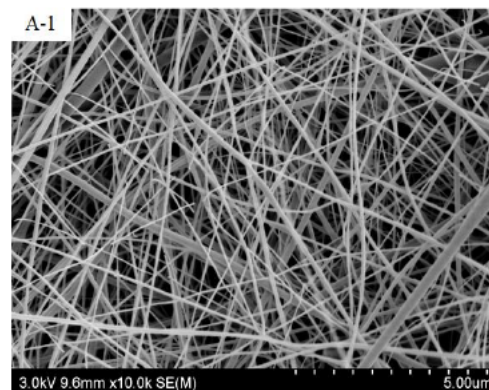

(A-1) 6 wt % SF + 0.1 wt % SDBS

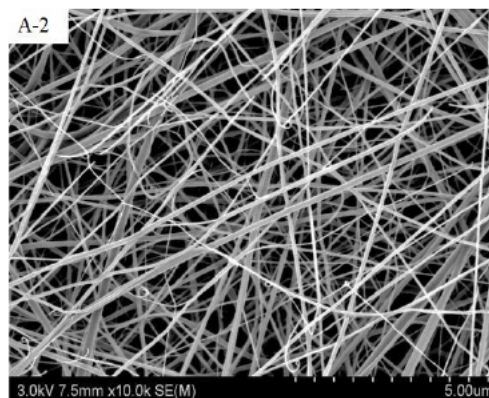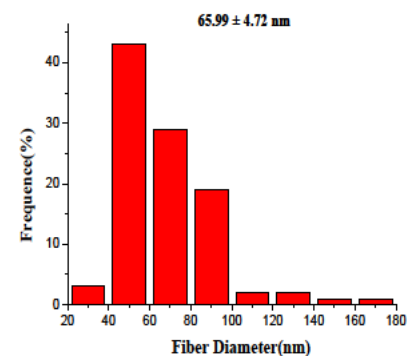

(A-2) 6 wt % SF + 0.4 wt % SDBS

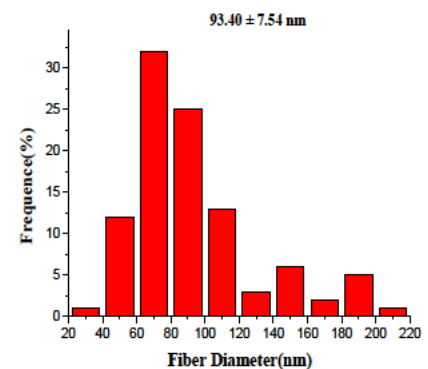


Figure 5. Cont.

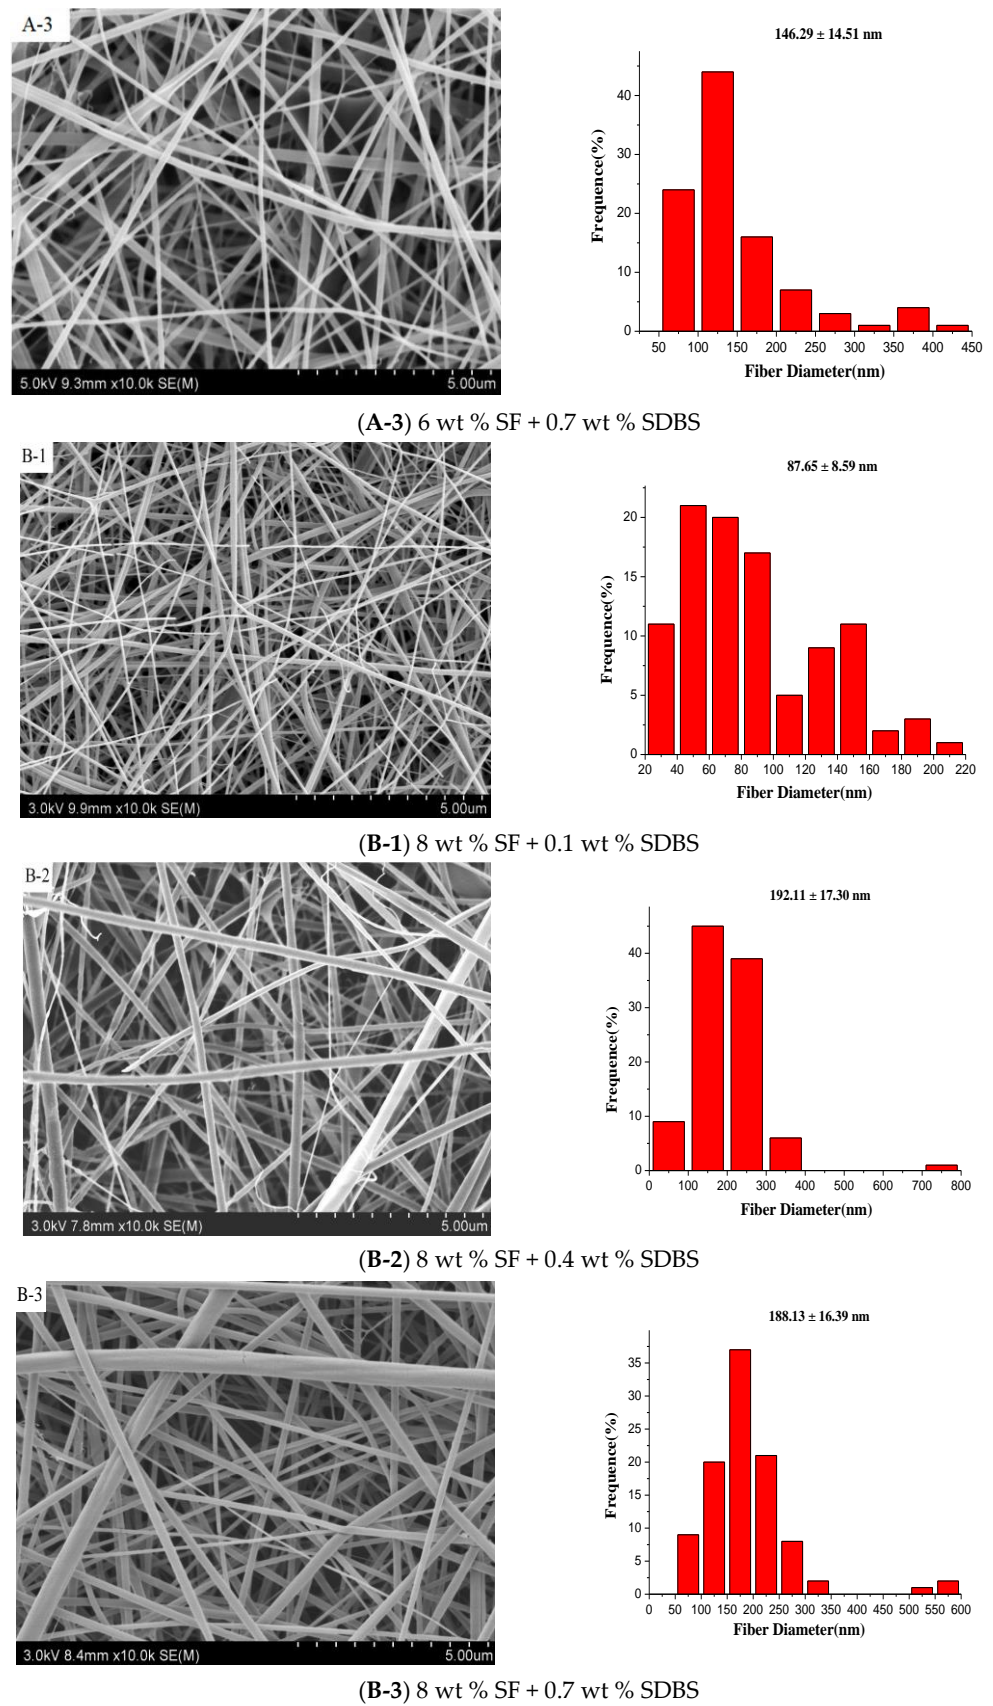


Figure 5. Cont.

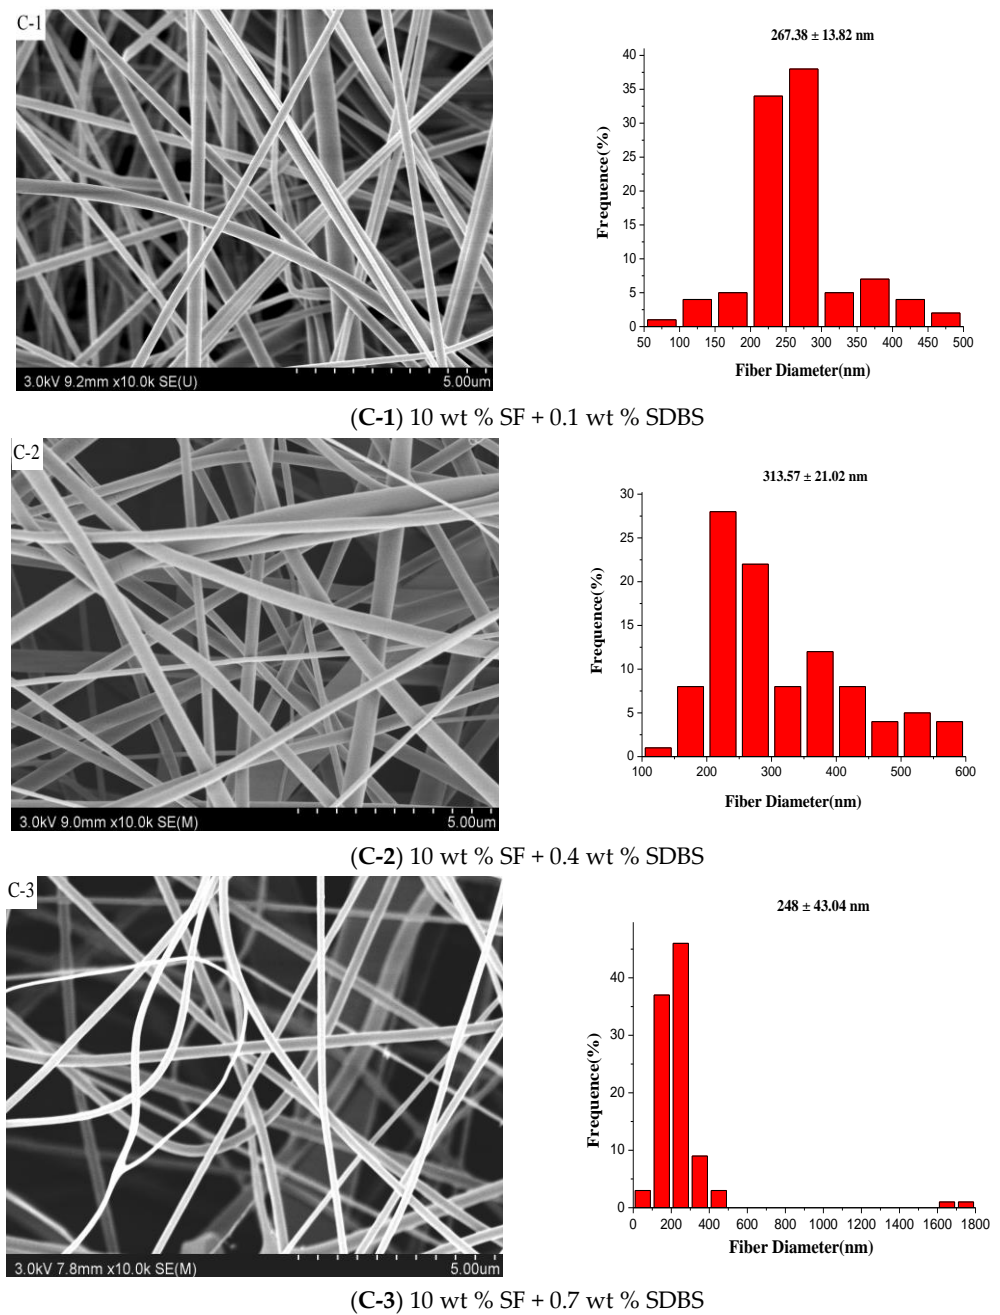


Figure 5. SEM pictures and the according diameter distribution of the SF nanofibers with SF concentrations of (A) 6 wt %; (B) 8 wt % and (C) 10 wt %, respectively. (Gas flow volume: 150 m³/h).

Reference

1. Fang, Y.; Xu, L.; Wang, M. High-Throughput Preparation of Silk Fibroin Nanofibers by Modified Bubble-Electrospinning. *Nanomaterials* **2018**, *8*, 471. [[CrossRef](#)] [[PubMed](#)]