

Triboelectric Plasma CO₂ Reduction Reaching a Mechanical Energy Conversion Efficiency of 2.3%

Sumin Li, Bao Zhang, Guangqin Gu, Dongyang Fang, Xiaochen Xiang, Wenhe Zhang, Yifei Zhu, Jiao Wang, Junmeng Cuo, Peng Cui, Gang Cheng,* and Zuliang Du*

Adv. Sci. 2022, 9, 2201633

DOI: 10.1002/advs.202201633

In the original published article, Figure S4f is the same as Figure S4d. Please find the correct Figure S4f below. The authors apologize for any inconvenience caused.

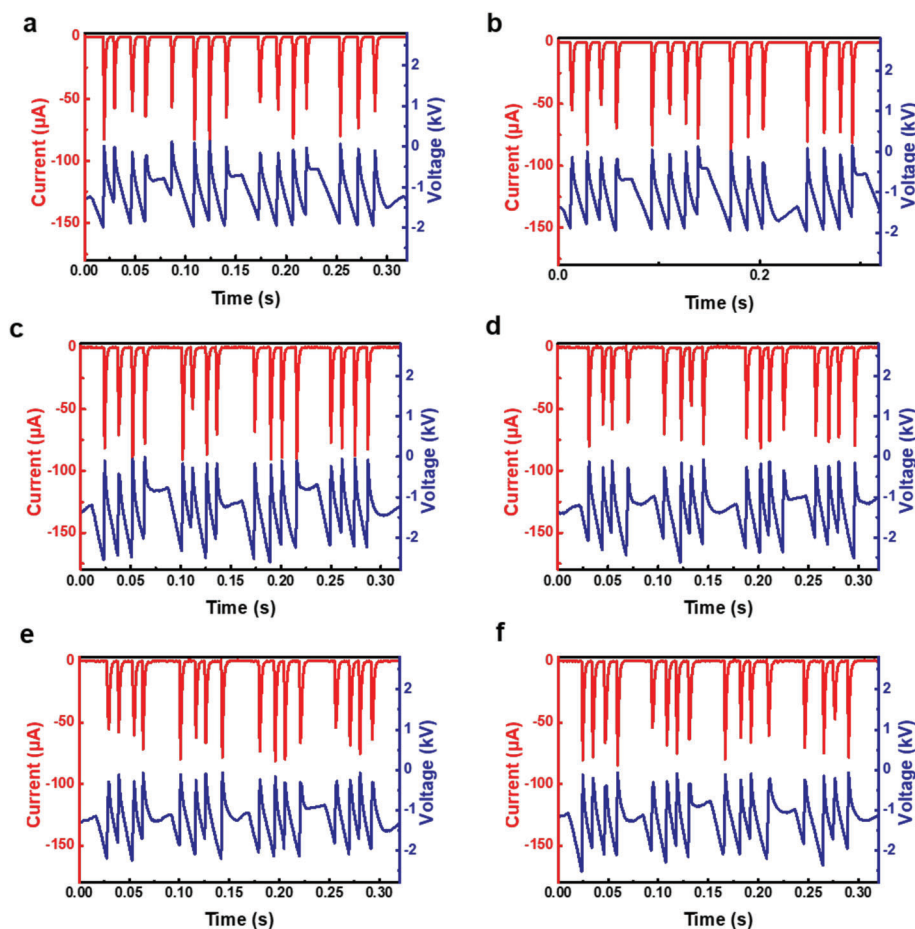


Figure S4. Current and voltage curves of triboelectric plasma at CO₂ flow rates of 0.2, 1.0, 5.0, 7.5, 10, and 12.5 mL min⁻¹. Reaction conditions: TENG rotational speed, 180 rpm; discharge distance, 0.8 mm; room temperature; and atmospheric pressure.

© 2022 The Authors. Advanced Science published by Wiley-VCH GmbH. This is an open access article under the terms of the Creative Commons Attribution License, which permits use, distribution and reproduction in any medium, provided the original work is properly cited.

DOI: 10.1002/advs.202206125