

This is the simple example template containing only headers for each report item and the bookmarks. The invisible bookmarks are indicated by text between brackets.


Modify it according to your own needs and standards.

Measurement Conditions: (Bookmark 1)

Dataset Name 309B Ti4AlB2C Optimized_3
File name E:\XRD data files\New Analysis-Dr. Moynul-BAUET\4th slot-XRD (1250 C)-04\309-B Ti4AlB2C-1250 C\309B Ti4AlB2C Optimized_3.xrxml
Comment Configuration=Flat Sample Stage, Owner=pc, Creation date=11/22/2023 7:32:59 PM
Goniometer=Theta/Theta; Minimum step size 2Theta:0.0001; Minimum step size Omega:0.0001
Sample stage=Stage for flat samples/holders
Diffractometer system=EMPYREAN
Measurement program=C:\PANalytical\Data Collector\Programs\2B Ti3AlB2 Optimized.xrmp,
Created identifier={1511DE26-B7FE-4D9E-AD02-FB0BF5A869E9}, Created by=pc,
Id=WL:DESKTOP-BC0RBBD:pc, Creation date=1/18/2024 6:31:02 PM, Modified identifier={706E23D6-EF3A-4959-B077-79A506FC4E68}, Modified by=pc,
Id=WL:DESKTOP-BC0RBBD:pc, Modification date=2/7/2024 9:05:13 PM
PHD Lower Level = 4.02 (keV), PHD Upper Level = 16.10 (keV)
Measurement Start Date/Time 2/9/2024 7:35:42 PM
Operator pc
Raw Data Origin XRD measurement (*.XRDML)
Scan Axis Gonio
Start Position [$^{\circ}2\theta$] 20.0348
End Position [$^{\circ}2\theta$] 79.9628
Step Size [$^{\circ}2\theta$] 0.0660
Scan Step Time [s] 12.7500
Scan Type Continuous
PSD Mode Scanning
PSD Length [$^{\circ}2\theta$] 3.35
Offset [$^{\circ}2\theta$] 0.0000
Divergence Slit Type Fixed
Divergence Slit Size [$^{\circ}$] 0.7197
Specimen Length [mm] 10.00
Measurement Temperature [$^{\circ}\text{C}$] 25.00
Anode Material Cu
Intended Wavelength Type K- α 1
K- α 1 [\AA] 1.54060
K- α 2 [\AA] 1.54443
K- β 1 [\AA] 1.39225
K- β 2 [\AA] 1.38113
K- β 3 [\AA] 1.39261
K-A2 / K-A1 Ratio 0.50000
K-Alpha2 Line Shift 0.00000
K Absorption Edge 1.37868
Generator Settings 40 mA, 45 kV
Diffractometer Type 0000000011286122

Diffractometer Number 0
 Goniometer Radius [mm] 240.00
 Dist. Focus-Diverg. Slit [mm] 60.50
 Incident Beam Monochromator No
 Spinning No

Main Graphics, Analyze View: (Bookmark 2)

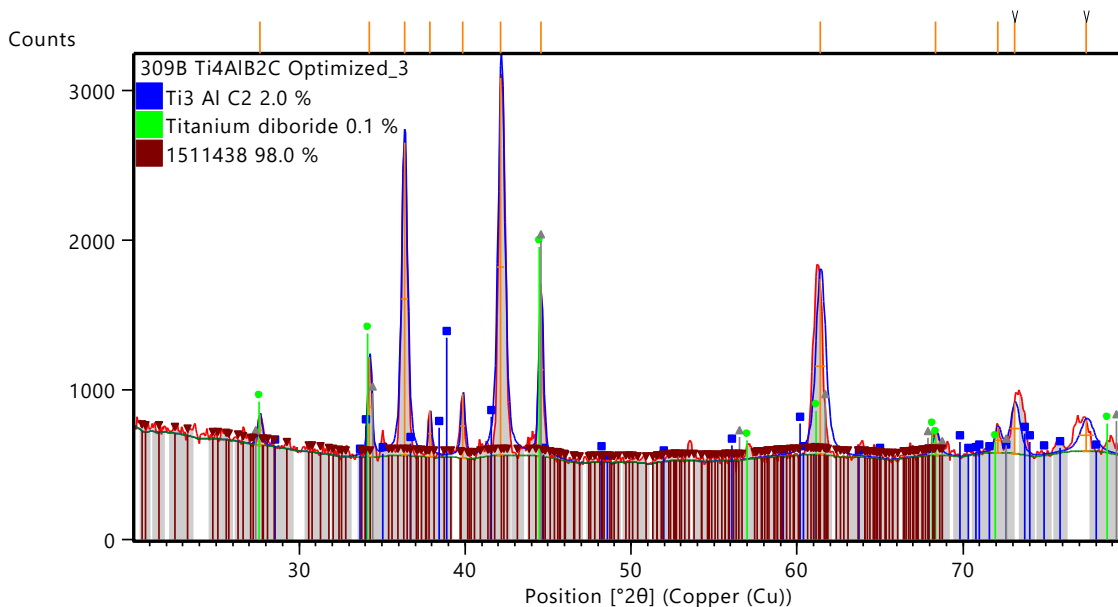

Peak List: (Bookmark 3)

Pos. [°2θ]	Height [cts]	FWHM Left [°2θ]	d-spacing [Å]	Rel. Int. [%]
27.6468	206.65	0.2598	3.22395	8.21
34.2453	668.61	0.2598	2.61634	26.57
36.3374	2090.35	0.3897	2.47037	83.06
37.8801	310.08	0.1948	2.37323	12.32
39.8576	427.84	0.2598	2.25992	17.00
42.1612	2516.64	0.4546	2.14162	100.00
44.5542	1152.86	0.2598	2.03199	45.81
61.3842	1172.66	0.6494	1.50913	46.60
68.3579	161.96	0.3897	1.37118	6.44
72.0701	172.68	0.3897	1.30941	6.86
73.0952	338.84	0.5845	1.29355	13.46
77.4108	204.61	0.9092	1.23185	8.13

Pattern List: (Bookmark 4)

Visible	Ref.Code	Score	Compound Name	Displ.[°2θ]	Scale Fac.	Chem. Formula
---------	----------	-------	---------------	-------------	------------	---------------

*	96-722- 1325	1	Ti3 Al C2	0.000	0.245	Ti6.00 C4.00 Al2.00
*	96-200- 2800	56	Titanium diboride	0.000	0.429	Ti1.00 B2.00
*	96-153- 2806	29	1532805	0.000	0.443	Al0.91 B2.00
*	96-151- 1439	No	1511438	0.000	0.000	B189.88

Matching
Lines

Document History: (Bookmark 5)

ESD calculated from counts:

- Modification time = "2/14/2024 11:29:27 AM"
- Modification editor = "pc"

Insert Measurement:

- File name = "309B Ti4AlB2C Optimized_3.xrdml"
- Modification time = "2/14/2024 11:29:27 AM"
- Modification editor = "pc"

Default properties:

- Measurement step axis = "None"
- Internal wavelengths used from anode material: Copper (Cu)
- Original K-Alpha1 wavelength = "1.54060"
- Used K-Alpha1 wavelength = "1.54060"
- Original K-Alpha2 wavelength = "1.54443"
- Used K-Alpha2 wavelength = "1.54443"
- Original K-Beta wavelength = "1.39225"
- Used K-Beta wavelength = "1.39225"
- Irradiated length = "10.00000"
- Spinner used = "No"
- KBeta filter material = "Ni"
- KBeta filter thickness = "0.02000"
- Receiving slit size = "0.10000"
- Step axis value = "0.00000"
- Offset = "0.00000"
- Sample length = "10.00000"
- Modification time = "2/14/2024 11:29:27 AM"
- Modification editor = "pc"

Interpolate Step Size:

- Initial Scan Range = 7.03283 - 89.95060
- Initial Step Size = 0.06565
- Derived Step Size = 0.06600
- Use Derived Step Size = "Yes"
- Parameterset name = "Default"
- PANalytical factory default
- Modification time = "2/14/2024 11:29:27 AM"

- Modification editor = "pc"

Clip Range:

- Old/New start = "7.0328/20.0000"
- Old/New end = "89.9288/80.0000"
- Modification time = "2/14/2024 11:29:59 AM"
- Modification editor = "pc"

Determine Background:

- Add to net scan = "Nothing"
- User defined intensity = "-5"
- Correction method = "Automatic"
- Bending factor = "1"
- Minimum significance = "0.7"
- Minimum tip width = "0"
- Maximum tip width = "1"
- Peak base width = "2"
- Use smoothed input data = "Yes"
- Granularity = "10"
- Search window = "5"
- Spline type = "Linear"
- Parameterset name = "Untitled"
- Parameterset modification time = "2/9/2024 8:08:11 PM"
- Parameterset modification editor = "pc"
- Modification time = "2/14/2024 11:30:16 AM"
- Modification editor = "pc"

Search Peaks:

- Minimum significance = "2"
- Minimum tip width = "0.1"
- Maximum tip width = "1"
- Peak base width = "2"
- Method = "Minimum 2nd derivative"
- Parameterset name = "Untitled"
- Parameterset modification time = "2/13/2024 3:42:23 PM"
- Parameterset modification editor = "pc"
- Modification time = "2/14/2024 11:30:22 AM"
- Modification editor = "pc"

Search & Match:

- Allow pattern shift = "No"
- Auto residue = "Yes"
- Data source = "Profile and peak list"
- Demote unmatched strong = "Yes"
- Multi phase = "Yes"
- Restriction set = "Untitled"
- Restriction = "Restriction set"
- Subset name = ""
- Match intensity = "Yes"
- Two theta shift = "0"
- Identify = "No"

- Max. no. of accepted patterns = "5"
- Minimum score = "50"
- Min. new lines / total lines = "60"
- Search depth = "10"
- Minimum new lines = "5"
- Minimum scale factor = "0.1"
- Intensity threshold = "0"
- Use line clustering = "Yes"
- Line cluster range = "1.5"
- Search sensitivity = "1.8"
- Use adaptive smoothing = "Yes"
- Smoothing range = "1.5"
- Threshold factor = "3"
- Match Threshold = "0"
- N * Esds = "-1"
- Raw Weight = "-1"
- Peak Shape = "-1"
- Accepted Shape = "-1"
- Peak Power = "-1"
- New Peak Power = "-1"
- Intensity Power = "-1"
- N Peaks Power = "-1"
- Parameterset name = "Untitled"
- Parameterset modification time = "2/14/2024 11:30:34 AM"
- Parameterset modification editor = "pc"
- Modification time = "2/14/2024 11:30:40 AM"
- Modification editor = "pc"

Convert Ref. Pattern to Phase:

- Modification time = "2/14/2024 11:31:35 AM"
- Modification editor = "pc"

Delete Selected Phase:

- Modification time = "2/14/2024 11:31:45 AM"
- Modification editor = "pc"

XRD Measurement Information: (Bookmark 6)

More items... (Bookmark 7)

More items... (Bookmark 8)

More items... (Bookmark 9)

More items... (Bookmark 10)

More items... (Bookmark 11)

More items... (Bookmark 12)

More items... (Bookmark 13)

More items... (Bookmark 14)

More items... (Bookmark 15)