

Supporting Materials

Conductive cable fibers with insulating surface prepared by co-axial electrospinning of multi-walled nanotubes and cellulose

Minoru Miyauchi,^{1,2} Jianjun Miao,^{2,3} Trevor J. Simmons,^{1,4} Jong-Won Lee,¹ Thomas V. Doherty,^{1,2,7} Jonathan S. Dordick,^{1,2,3,5,6} Robert J. Linhardt^{1,2,3,4,5,6}

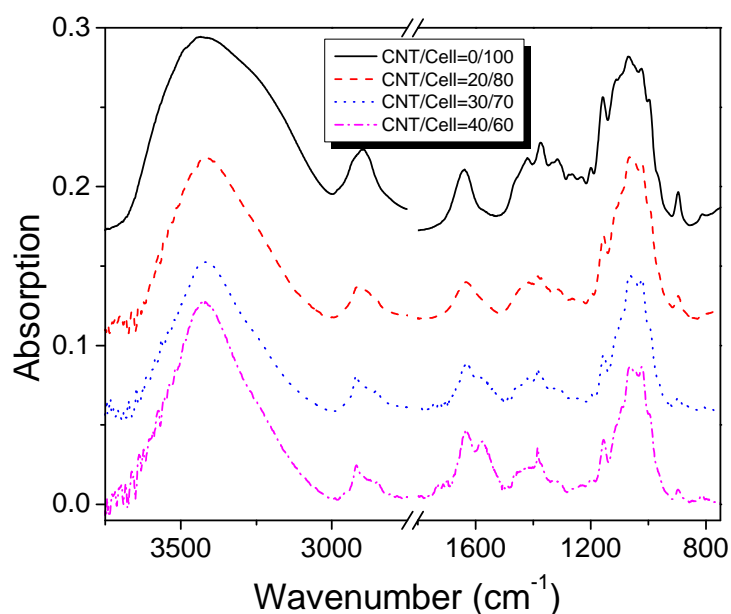


Figure S1 FT-IR spectra of MWNT-cellulose fibers with different loading of MWNT.

Table S1 Crystallinity Index calculated from FT-IR spectra, the ratio in the first row is MWNT/Cellulose.

	0/100	20/80	30/70	40/60
A_{1372}/A_{2900}	1.08	1.35	1.40	1.44