

Pure Graphene Oxide Doped Conducting Polymer Nanocomposite for Bio-interfacing

Xiliang Luo^{a,§}, Cassandra L. Weaver^{b,c,§}, Susheng Tan^d and Xinyan Tracy Cui^{b,c,e,}*

^a Key Laboratory of Biochemical Analysis, Ministry of Education, College of Chemistry and Molecular Engineering, Qingdao University of Science and Technology, Qingdao 266042, China

^b Department of Bioengineering, University of Pittsburgh, Pittsburgh, PA 15260, USA


^c Center for the Neural Basis of Cognition, University of Pittsburgh, Pittsburgh, PA 15260, USA

^d Petersen Institute of Nanoscience and Engineering, University of Pittsburgh, Pittsburgh, PA 15260, USA


^e McGowan Institute for Regenerative Medicine, University of Pittsburgh, Pittsburgh, PA 15260, USA

§ Authors contributed equally to this manuscript

Electronic Supplementary Figures

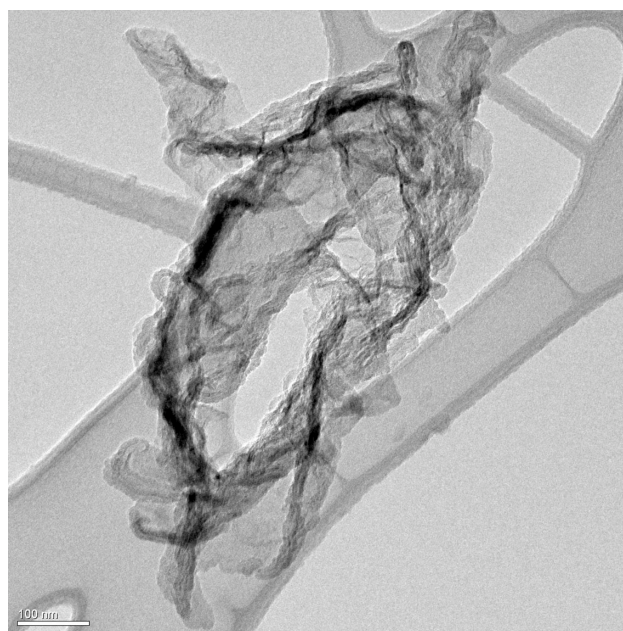

Supplementary Figure 1: TEM micrograph of the prepared GO showing its microsheet morphology.

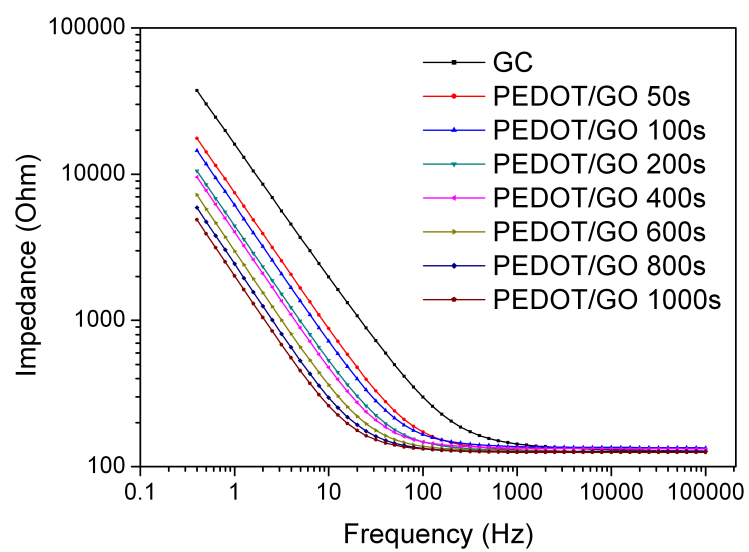

Supplementary Figure 2: Electrochemical impedance spectroscopy comparison of glassy carbon electrodes without and with PEDOT/GO coatings of different electrodeposition times. Longer deposition times result in decreased impedance values.