

Supplementary Materials

Environmentally Friendly Flexible Strain Sensor from Waste Cotton Fabrics and Natural Rubber Latex

Xinzhu Chen¹, **Jing An**², **Guangming Cai**¹, **Jin Zhang**³, **Wu Chen**¹, **Xiongwei Dong**¹, **Licheng Zhu**¹, **Bin Tang**^{1,3,*}, **Jinfeng Wang**^{1,3,*} and **Xungai Wang**^{1,3}

¹ National Engineering Laboratory for Advanced Textile Processing and Clean Production, Wuhan Textile University, Wuhan 430073, China; cxz_wtu@163.com (X.C.); guangmingcai2006@163.com (G.C.); wuchen@wtu.edu.cn (W.C.); xwdong@wtu.edu.cn (X.D.); lichengz84@sina.com (L.Z.); xungai.wang@deakin.edu.au (X.W.)

² Zhuhai College of Jilin University, School of Chemical Engineering and New Energy Materials, Zhuhai 519041, China; 15031@jluzh.com

³ Deakin University, Institute for Frontier Materials, Geelong, VIC 3216, Australia; jin.zhang@deakin.edu.au

* Correspondence: bin.tang@deakin.edu.au (B.T.); jinfeng.wang@deakin.edu.au (J.W.);
Tel.: +61-3-5227-2012 (B.T. & J.W.)

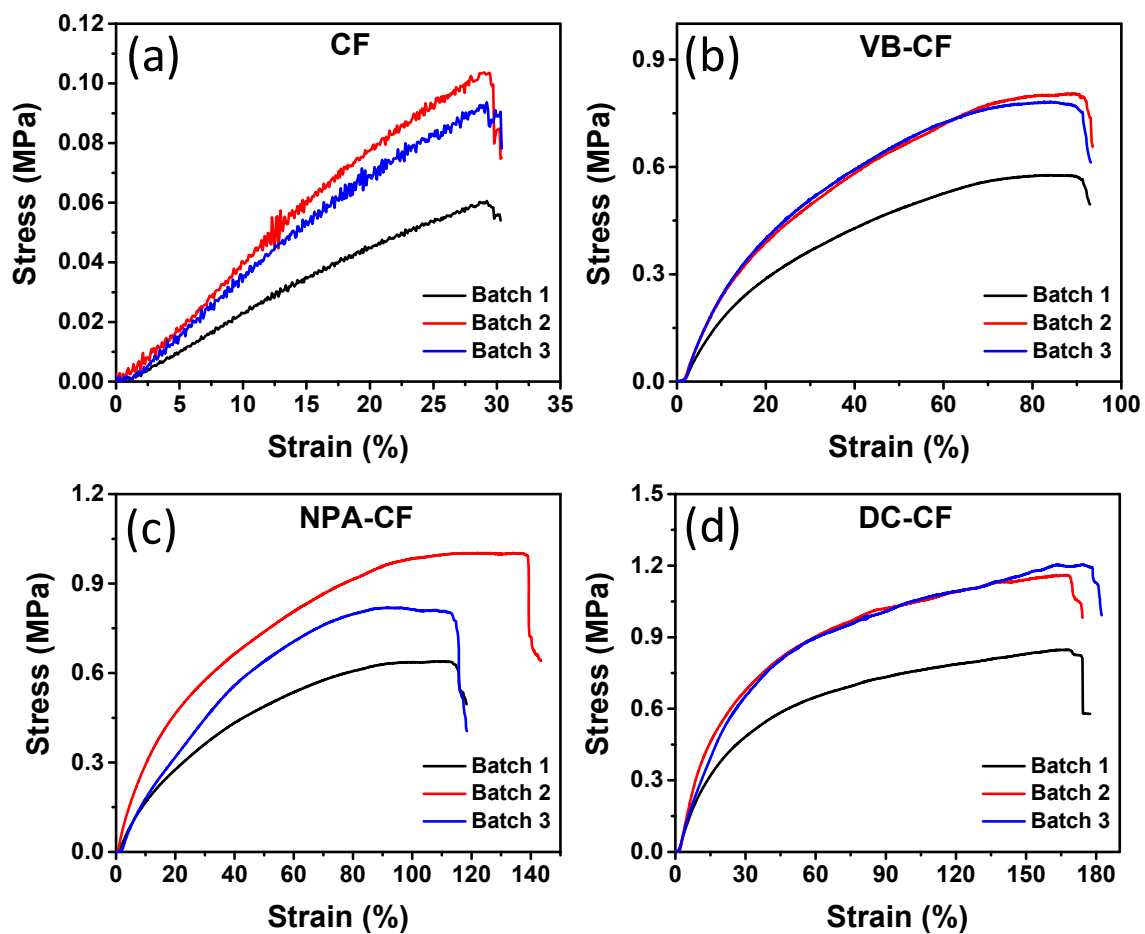


Figure S1. Curves of stress versus strain corresponding to the fabric samples from different batches.

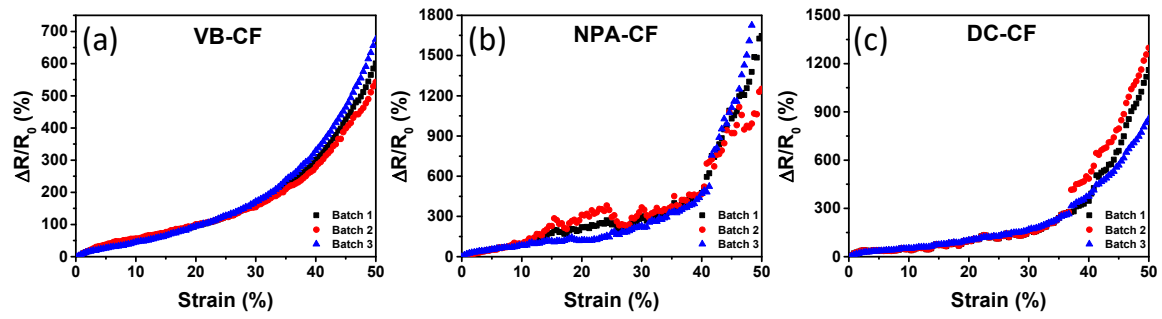


Figure S2. Relative resistance variation ($\Delta R/R_0$) under tensile loading for textile composites from different batches.