

Supporting Information

Conducting Polymer Scaffolds based on PEDOT and Xanthan Gum for Live-Cell Monitoring

*Isabel del Agua^{a,b}, Sara Marina^b, Charalampos Pitsalidis^{b,d}, Daniele Mantione^b, Magali Ferro^b,
Donata Iandolo^{b,d}, Ana Sanchez- Sanchez^c, George G. Malliaras^{b,c}, Róisín M. Owens^{b,d},* David
Mecerreyes^{a,e*}*

^a POLYMAT University of the Basque Country UPV/EHU, Joxe Mari Korta Center, Avda. Tolosa 72, 20018 Donostia-san Sebastian, Spain

^b Department of Bioelectronics, Ecole Nationale Supérieure des Mines, CMP-EMSE, MOC, 13541 Gardanne, France

^c University of Cambridge, Dept. of Eng., Electrical Eng. Division, 9 JJ Thomson Avenue, Cambridge, CB3 0FA, UK

^d Department of Chemical Engineering and Biotechnology, Philippa Fawcett Drive, Cambridge, CB3 0AS, UK

^e Ikerbasque, Basque Foundation for Science, E-48011 Bilbao, Spain

E-mails: david.mecerreyes@ehu.es, rmo37@cam.ac.uk

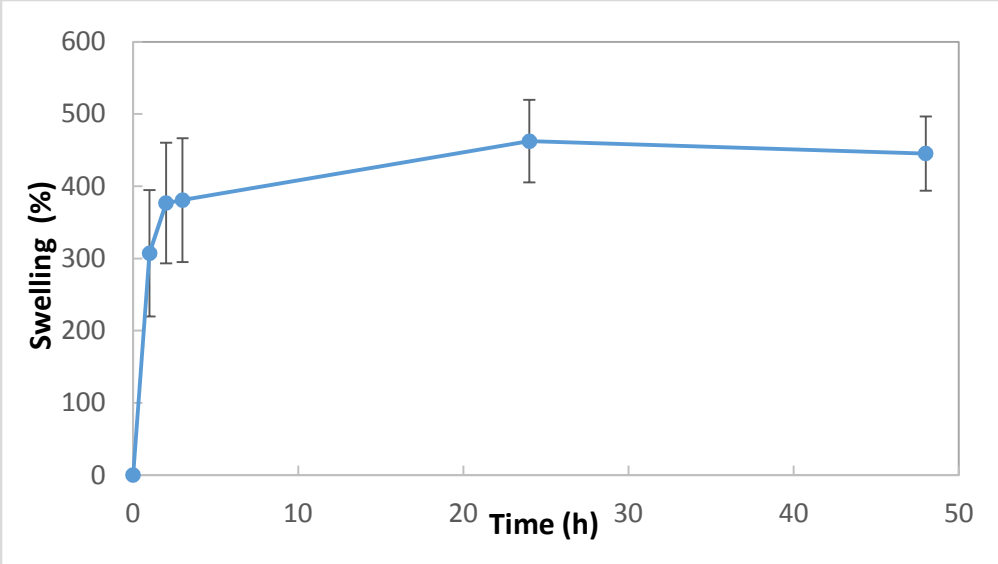


Figure S1. Scaffold PEDOT:xanthan gum (0.5:0.5) 2%wt swelling ratio in cell media measured at t=0, 1, 2, 3, 24 and 48h.