

Supplemental information

Plasma treatment

The membranes were plasma-treated using the Plasma Cleaner (PDC-32G-2, Harrick Plasma, USA). The membranes were treated for 45 seconds under High RF settings (18W).

Tensile stress-strain curve

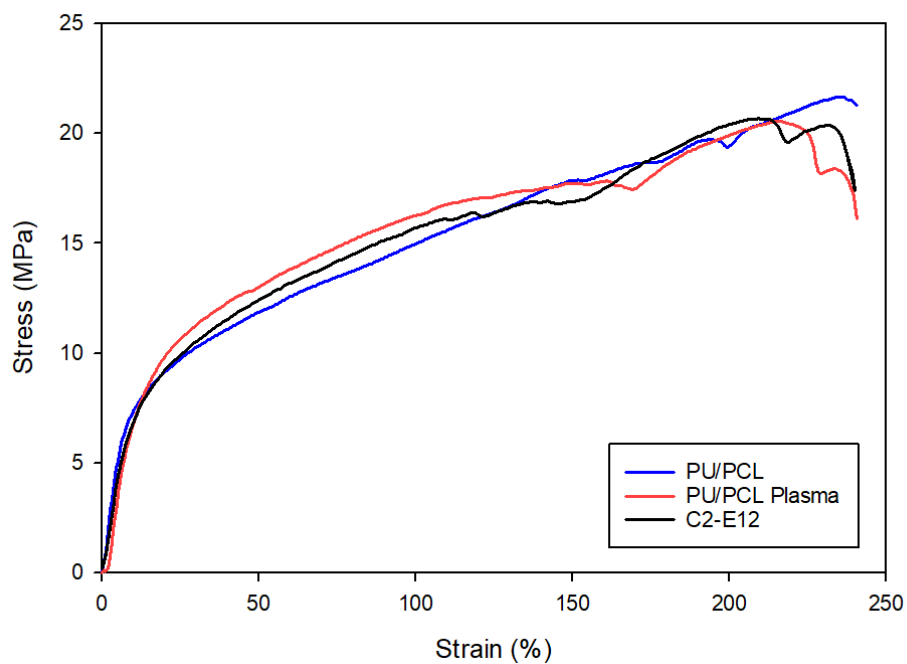


Figure S1. Stress-strain curve of the membranes when subjected to tension.