


2011


	OD	OS
Average RNFL Thickness	64 μ m	67 μ m
RNFL Symmetry	52%	
Rim Area	0.60 mm ²	0.68 mm ²
Disc Area	1.79 mm ²	1.39 mm ²
Average C/D Ratio	0.83	0.71
Vertical C/D Ratio	0.81	0.72
Cup Volume	0.556 mm ³	0.199 mm ³

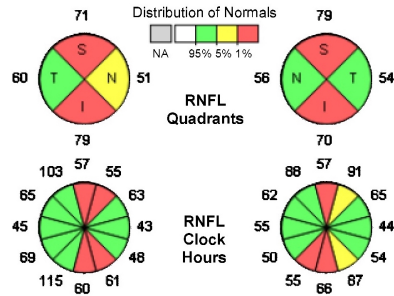

9/10 Signal Strength 8/10

2012


	OD	OS
Average RNFL Thickness	64 μ m	67 μ m
RNFL Symmetry	52%	
Rim Area	0.60 mm ²	0.68 mm ²
Disc Area	1.79 mm ²	1.39 mm ²
Average C/D Ratio	0.83	0.71
Vertical C/D Ratio	0.81	0.72
Cup Volume	0.556 mm ³	0.199 mm ³

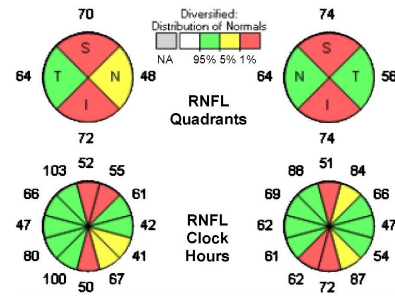

10/10 Signal Strength 9/10

2013


	OD	OS
Average RNFL Thickness	62 μ m	69 μ m
RNFL Symmetry	46%	
Rim Area	0.58 mm ²	0.73 mm ²
Disc Area	1.76 mm ²	1.50 mm ²
Average C/D Ratio	0.83	0.70
Vertical C/D Ratio	0.81	0.72
Cup Volume	0.544 mm ³	0.215 mm ³

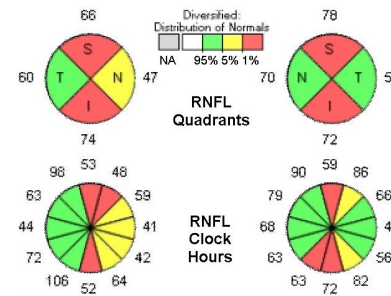


10/10 Signal Strength 7/10

2019


	OD	OS
Average RNFL Thickness	61 μ m	63 μ m
RNFL Symmetry	35%	
Rim Area	0.48 mm ²	0.59 mm ²
Disc Area	1.79 mm ²	1.34 mm ²
Average C/D Ratio	0.87	0.74
Vertical C/D Ratio	0.87	0.77
Cup Volume	0.665 mm ³	0.235 mm ³

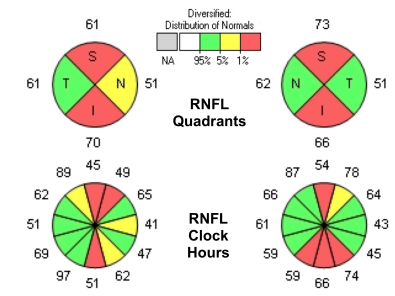


8/10 Signal Strength 8/10

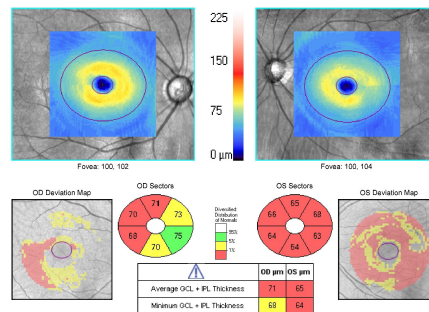

9/10 Signal Strength 9/10

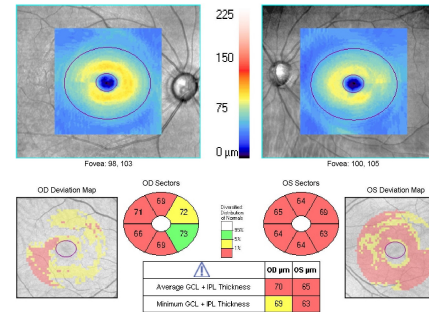

10/10 Signal Strength 9/10

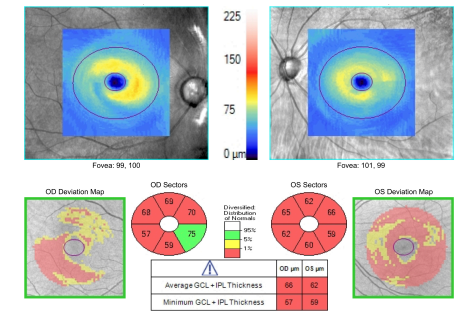

8/10 Signal Strength 8/10