

Supporting Information

Efficient Air-Stable Perovskite Solar Cells with (FAI)_{0.46}(MAI)_{0.40}(MABr)_{0.14}(PbI₂)_{0.86}(PbBr₂)_{0.14} Active Layer Fabricated via Vacuum Flash-assisted Method under RH>50%

Li Chen,^{a,b} Hui Cao,^{a*} Shurong Wang,^a Yuxing Luo,^b Tao Tao,^a Jingwei Sun^a and
Mingdao Zhang^{a*}

^{a.} *Monitoring and Pollution Control, Collaborative Innovation Center of Atmospheric Environment and Equipment Technology, School of Chemistry and Materials, Nanjing University of Information Science & Technology, Nanjing 210044, Jiangsu, PR China. E-mail: yccaoh@hotmail.com; matchlessjimmy@163.com*

^{b.} *Institute of Functional Nano & Soft Materials, Soochow University, Soochow 215123, P.R. China.*

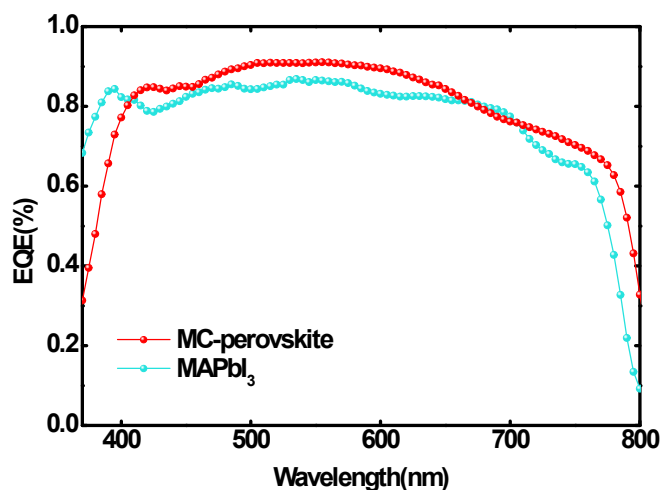


Figure S1. IPCE (EQE) of MAPbI₃ and MC-perovskite.