

Stable Multi – jet Electrospinning with High Throughput Using the Bead Structure Nozzle

Yingying Zhang,^{a,†} Zhiqiang Cheng,^{a,†,*} Zhaolian Han,^a Shengzhe Zhao,^a Xiaodong Zhao,^a Lijuan Kang^{a,*}

^a College of Resources and Environment, Jilin Agricultural University, Changchun 130118, People's Republic of China.

* Corresponding author E-mail: czq5974@163.com; klj410@126.com

[†] Yingying Zhang and Zhiqiang Cheng contributed to the work equally.

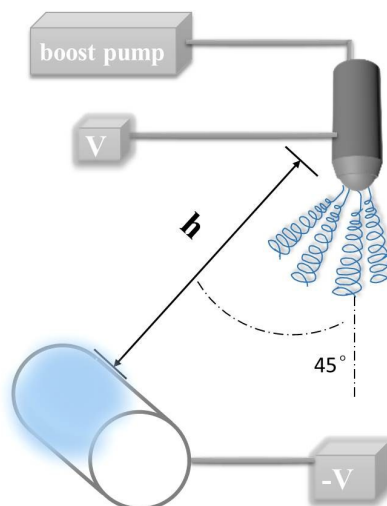


Fig. S1. The schematic of the position of the cylinder receiver

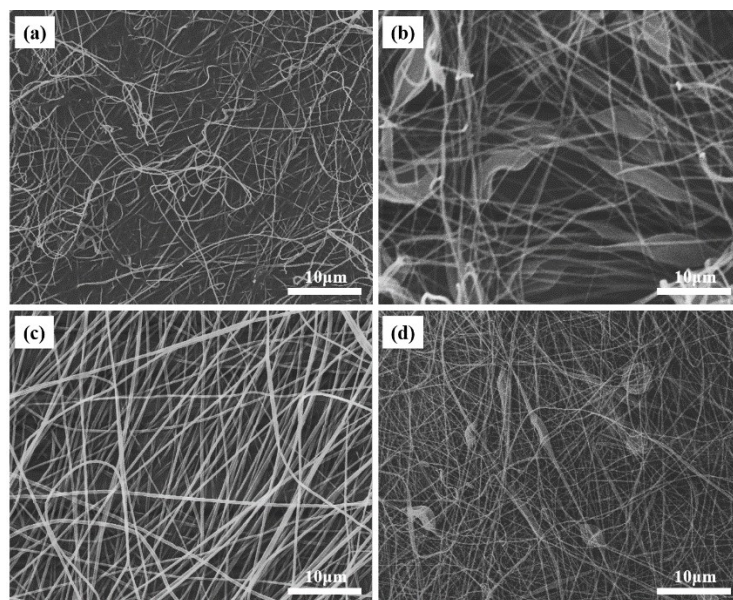


Fig. S2. Scanning electron microscopy micrographs of (a-b) fibers of PVP (3 wt%, the flow rate = 0.3 and 0.6 ml/min, respectively) and (c-d) fibers of PAN (8 wt%, the flow rate = 0.7 and 1.0 ml/min, respectively) with the voltage = 20 KV, the receiving distance = 7 cm