

# GRNADE: GEOMETRIC DEEP LEARNING FOR 3D RNA INVERSE DESIGN

Chaitanya K. Joshi<sup>1</sup>, Arian R. Jamasb<sup>1,2</sup>, Ramon Viñas<sup>3</sup>, Charles Harris<sup>1</sup>,  
Simon Mathis<sup>1</sup>, Alex Morehead<sup>4</sup>, Rishabh Anand<sup>5</sup>, Pietro Liò<sup>1</sup>

<sup>1</sup>University of Cambridge, UK, <sup>2</sup>Prescient Design, Genentech, Roche, <sup>3</sup>EPFL, Switzerland,

<sup>3</sup>University of Missouri, USA <sup>5</sup>National University of Singapore

Correspondence: [chaitanya.joshi@cl.cam.ac.uk](mailto:chaitanya.joshi@cl.cam.ac.uk)

## ABSTRACT

Computational RNA design tasks are often posed as inverse problems, where sequences are designed based on adopting a single desired secondary structure without considering 3D geometry and conformational diversity. We introduce **gRNAde**, a **geometric RNA design** pipeline operating on 3D RNA backbones to design sequences that explicitly account for structure and dynamics. gRNAde uses a multi-state Graph Neural Network and autoregressive decoding to generate candidate RNA sequences conditioned on one or more 3D backbone structures where the identities of the bases are unknown. On a single-state fixed backbone re-design benchmark of 14 RNA structures from the PDB identified by [Das et al. \(2010\)](#), gRNAde obtains higher native sequence recovery rates (56% on average) compared to Rosetta (45% on average), taking under a second to produce designs compared to the reported hours for Rosetta. We further demonstrate the utility of gRNAde on a new benchmark of multi-state design for structurally flexible RNAs, as well as zero-shot ranking of mutational fitness landscapes in a retrospective analysis of a recent ribozyme. Open source code: [github.com/chaitjo/geometric-rna-design](https://github.com/chaitjo/geometric-rna-design)

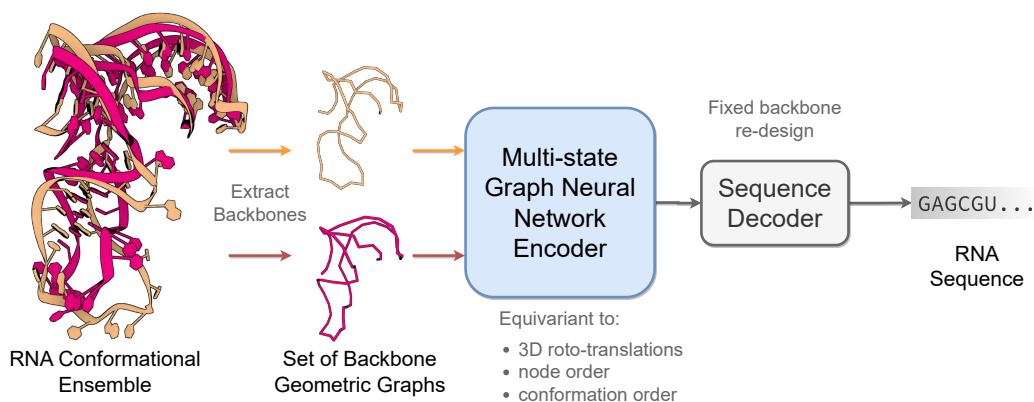


Figure 1: **The gRNAde pipeline for 3D RNA inverse design.** gRNAde is a generative model for RNA sequence design conditioned on backbone 3D structure(s). gRNAde processes one or more RNA backbone graphs (a conformational ensemble) via a multi-state GNN encoder which is equivariant to 3D roto-translation of coordinates as well as conformational state order, followed by conformational state order-invariant pooling and autoregressive sequence decoding.

## 1 INTRODUCTION

**Why RNA design?** Historical efforts in computational drug discovery have focussed on designing small molecule or protein-based medicines that either treat symptoms or counter the end stages of disease processes. In recent years, there is a growing interest in designing new RNA-based therapeutics that intervene earlier in disease processes to cut off disease-causing information flow in the cell (Damase et al., 2021; Zhu et al., 2022). Notable examples of RNA molecules at the forefront of biotechnology today include mRNA vaccines (Metkar et al., 2024) and CRISPR-based genomic medicine (Doudna & Charpentier, 2014). Of particular interest for structure-based design are ribozymes and riboswitches in the untranslated regions of mRNAs (Mandal & Breaker, 2004; Leppik et al., 2018). In addition to coding for proteins (such as the spike protein in the Covid vaccine), naturally occurring mRNAs contain riboswitches that are responsible for cell-state dependent protein expression of the mRNA. Riboswitches act by ‘switching’ their 3D structure from an unbound conformation to a bound one in the presence of specific metabolites or small molecules. Rational design of riboswitches will enable translation to be dependent on the presence or absence of partner molecules, essentially acting as ‘on-off’ switches for highly targeted mRNA therapies in the future (Felletti et al., 2016; Mustafina et al., 2019; Mohsen et al., 2023).

**Challenges of RNA modelling.** Despite the promises of RNA therapeutics, proteins have instead been the primary focus in the 3D biomolecular modelling community. Availability of a large number of protein structures from the PDB combined with advances in deep learning for structured data (Bronstein et al., 2021; Duval et al., 2023) have revolutionized protein 3D structure prediction (Jumper et al., 2021) and rational design (Dauparas et al., 2022; Watson et al., 2023). Applications of deep learning for computational RNA design are underexplored compared to proteins due to paucity of 3D structural data (Schneider et al., 2023). Most tools for RNA design primarily focus on secondary structure without considering 3D geometry (Churkin et al., 2018) and use non-learned algorithms for aligning 3D RNA fragments (Han et al., 2017; Yesselman et al., 2019), which can be restrictive due to the hand-crafted nature of the heuristics used.

In addition to limited 3D data for training deep learning models, the key technical challenge is that RNA is more dynamic than proteins. The same RNA can adopt multiple distinct conformational states to create and regulate complex biological functions (Ganser et al., 2019; Hoetzel & Suess, 2022; Ken et al., 2023). Computational RNA design pipelines must account for both the 3D geometric structure and conformational flexibility of RNA to engineer new biological functions.

**Our contributions.** This paper introduces **gRNAd**, a geometric deep learning-based pipeline for RNA inverse design conditioned on 3D structure, analogous to ProteinMPNN for proteins (Dauparas et al., 2022). As illustrated in Figure 1, gRNAd generates candidate RNA sequences conditioned on one or more backbone 3D conformations, enabling both single- and multi-state fixed-backbone sequence design. We demonstrate the utility of gRNAd for the following design scenarios:

- **Improved performance and speed over Rosetta.** We compare gRNAd to Rosetta (Leman et al., 2020), the state-of-the-art physically based tool for 3D RNA inverse design, for single-state fixed backbone design of 14 RNA structures of interest from the PDB identified by Das et al. (2010). We obtain higher native sequence recovery rates with gRNAd (56% on average) compared to Rosetta (45% on average). Additionally, gRNAd is significantly faster than Rosetta for inference; e.g. sampling 100+ designs in 1 second for an RNA of 60 nucleotides on an A100 GPU (<10 seconds on CPU), compared to the reported hours for Rosetta on CPU.
- **Multi-state RNA design,** which was previously not possible with Rosetta. gRNAd with multi-state GNNs improves sequence recovery by 5% over an equivalent single-state model on a benchmark of structurally flexible RNAs, especially for surface nucleotides which undergo positional or secondary structural changes. gRNAd’s GNN is the first geometric deep learning architecture for multi-state biomolecule representation learning.
- **Zero-shot learning of RNA fitness landscape.** In a retrospective analysis of mutational fitness landscape data for an RNA polymerase ribozyme (McRae et al., 2024), we show how gRNAd’s perplexity, the likelihood of a sequence folding into a backbone structure, can be used to rank mutants based on fitness in a zero-shot/unsupervised manner and outperforms random mutagenesis for improving fitness over the wild type in low throughput scenarios.

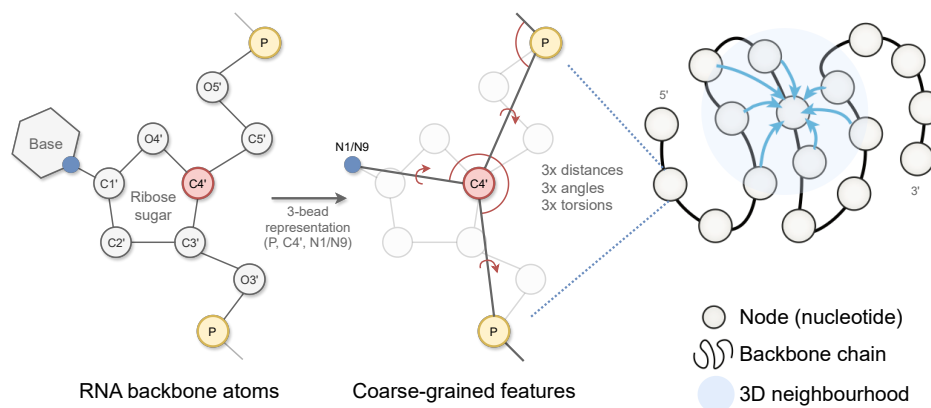


Figure 2: **gRNAde featurizes RNA backbone structures as 3D geometric graphs.** Each RNA nucleotide is a node in the graph, consisting of 3 coarse-grained beads for the coordinates for P, C4', N1 (pyrimidines) or N9 (purines) which are used to compute initial geometric features and edges to nearest neighbours in 3D space. Backbone chain figure adapted from [Ingraham et al. \(2019\)](#).

## 2 THE GRNADE PIPELINE

[Figure 1](#) illustrates the RNA inverse folding problem: the task of designing new RNA sequences conditioned on a structural backbone. Given the 3D coordinates of a backbone structure, machine learning models must generate sequences that are likely to fold into that shape. The underlying assumption behind inverse folding (and rational biomolecule design) is that structure determines function ([Huang et al., 2016](#)).

Following best practices in protein design, gRNAde uses a structure-conditioned, autoregressive language model with geometric GNN encoder and decoder ([Jing et al., 2020](#); [Dauparas et al., 2022](#)). Our main architectural contribution is a multi-state GNN for modelling sets of 3D backbones (described in [Section 2.2](#)) as well as an efficient PyG implementation ([Appendix Figure 13](#) and the pseudocode). To the best of our knowledge, gRNAde is the first explicitly multi-state inverse folding pipeline, allowing users to design sequences for backbone conformational ensembles (a set of 3D backbone structures) as opposed to a single structure.

### 2.1 RNA CONFORMATIONAL ENSEMBLES AS GEOMETRIC MULTI-GRAPHS

**Featurization.** The input to gRNAde is an RNA to be re-designed. For instance, this could be a set of PDB files with 3D backbone structures for the given RNA (a conformational ensemble) and the corresponding sequence of  $n$  nucleotides. As shown in [Figure 2](#), gRNAde builds a geometric graph representation for each input structure:

1. We start with a 3-bead coarse-grained representation of the RNA backbone, retaining the coordinates for P, C4', N1 (pyrimidine) or N9 (purine) for each nucleotide ([Dawson et al., 2016](#)). This ‘pseudotorsional’ representation describes RNA backbones completely in most cases while reducing the size of the torsional space to prevent overfitting ([Wadley et al., 2007](#)).
2. Each nucleotide  $i$  is assigned a node in the geometric graph with the 3D coordinate  $\vec{x}_i \in \mathbb{R}^3$  corresponding to the centroid of the 3 bead atoms. Random Gaussian noise with standard deviation  $0.1\text{\AA}$  is added to coordinates during training to prevent overfitting on crystallisation artifacts, following [Dauparas et al. \(2022\)](#). Each node is connected by edges to its 32 nearest neighbours as measured by the pairwise distance in 3D space,  $\|\vec{x}_i - \vec{x}_j\|_2$ .
3. Nodes are initialized with geometric features analogous to the featurization used in protein inverse folding ([Ingraham et al., 2019](#); [Jing et al., 2020](#)): (a) forward and reverse unit vectors along the backbone from the 5' end to the 3' end,  $(\vec{x}_{i+1} - \vec{x}_i$  and  $\vec{x}_i - \vec{x}_{i-1})$ ; and (b) unit vectors, distances, angles, and torsions from each C4' to the corresponding P and N1/N9.

4. Edge features for each edge from node  $j$  to  $i$  are initialized as: (a) the unit vector from the source to destination node,  $\vec{x}_j - \vec{x}_i$ ; (b) the distance in 3D space,  $\|\vec{x}_j - \vec{x}_i\|_2$ , encoded by 32 radial basis functions; and (c) the distance along the backbone,  $j - i$ , encoded by 32 sinusoidal positional encodings.

**Multi-graph representation.** As described in the previous section, given a set of  $k$  (conformational state) structures in the input conformational ensemble, each RNA backbone is featurized as a separate geometric graph  $\mathcal{G}^{(k)} = (\mathbf{A}^{(k)}, \mathbf{S}^{(k)}, \vec{\mathbf{V}}^{(k)})$  with the scalar features  $\mathbf{S}^{(k)} \in \mathbb{R}^{n \times f}$ , vector features  $\vec{\mathbf{V}}^{(k)} \in \mathbb{R}^{n \times f' \times 3}$ , and  $\mathbf{A}^{(k)}$ , an  $n \times n$  adjacency matrix. For clear presentation and without loss of generality, we omit edge features and use  $f, f'$  to denote scalar/vector feature channels.

The input to gRNAd is thus a set of geometric graphs  $\{\mathcal{G}^{(1)}, \dots, \mathcal{G}^{(k)}\}$  which is merged into what we term a ‘multi-graph’ representation of the conformational ensemble,  $\mathcal{M} = (\mathbf{A}, \mathbf{S}, \vec{\mathbf{V}})$ , by stacking the set of scalar features  $\{\mathbf{S}^{(1)}, \dots, \mathbf{S}^{(k)}\}$  into one tensor  $\mathbf{S} \in \mathbb{R}^{n \times k \times f}$  along a new axis for the set size  $k$ . Similarly, the set of vector features  $\{\vec{\mathbf{V}}^{(1)}, \dots, \vec{\mathbf{V}}^{(k)}\}$  is stacked into one tensor  $\vec{\mathbf{V}} \in \mathbb{R}^{n \times k \times f' \times 3}$ . Lastly, the set of adjacency matrices  $\{\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k)}\}$  are merged via a union  $\cup$  into one single joint adjacency matrix  $\mathbf{A}$ .

## 2.2 MULTI-STATE GNN FOR ENCODING CONFORMATIONAL ENSEMBLES

The gRNAd model, illustrated in Appendix Figure 12, processes one or more RNA backbone graphs via a multi-state GNN encoder which is equivariant to 3D roto-translation of coordinates as well as to the ordering of conformational states, followed by conformational state order-invariant pooling and sequence decoding. We describe each component in the following sections.

**Multi-state GNN encoder.** When representing conformational ensembles as a multi-graph, each node feature tensor contains three axes: (#nodes, #conformations, feature channels). We perform message passing on the multi-graph adjacency to *independently* process each conformational state, while maintaining permutation equivariance of the updated feature tensors along both the first (#nodes) and second (#conformations) axes. This works by operating on only the feature channels axis and generalising the PyTorch Geometric (Fey & Lenssen, 2019) message passing class to account for the extra conformations axis; see Appendix Figure 13 and the pseudocode for details.

We use multiple rotation-equivariant GVP-GNN (Jing et al., 2020) layers to update scalar features  $s_i \in \mathbb{R}^{k \times f}$  and vector features  $\vec{v}_i \in \mathbb{R}^{k \times f' \times 3}$  for each node  $i$ :

$$\mathbf{m}_i, \vec{\mathbf{m}}_i := \sum_{j \in \mathcal{N}_i} \text{MSG}((s_i, \vec{v}_i), (s_j, \vec{v}_j), e_{ij}), \quad (1)$$

$$s'_i, \vec{v}'_i := \text{UPD}((s_i, \vec{v}_i), (\mathbf{m}_i, \vec{\mathbf{m}}_i)), \quad (2)$$

where MSG, UPD are Geometric Vector Perceptrons, a generalization of MLPs to take tuples of scalar and vector features as input and apply  $O(3)$ -equivariant non-linear updates. The overall GNN encoder is  $SO(3)$ -equivariant due to the use of reflection-sensitive input features (dihedral angles) combined with  $O(3)$ -equivariant GVP-GNN layers.

Our multi-state GNN encoder is easy to implement in any message passing framework and can be used as a *plug-and-play* extension for any geometric GNN pipeline to incorporate the multi-state inductive bias. It serves as an elegant alternative to batching all the conformations, which we found required major alterations to message passing and pooling depending on downstream tasks.

**Conformation order-invariant pooling.** The final encoder representations in gRNAd account for multi-state information while being invariant to the permutation of the conformational ensemble. To achieve this, we perform a Deep Set pooling (Zaheer et al., 2017) over the conformations axis after the final encoder layer to reduce  $\mathbf{S} \in \mathbb{R}^{n \times k \times f}$  and  $\vec{\mathbf{V}} \in \mathbb{R}^{n \times k \times f' \times 3}$  to  $\mathbf{S}' \in \mathbb{R}^{n \times f}$  and  $\vec{\mathbf{V}}' \in \mathbb{R}^{n \times f' \times 3}$ :

$$\mathbf{S}', \vec{\mathbf{V}}' := \frac{1}{k} \sum_{i=1}^k \left( \mathbf{S}[:, i], \vec{\mathbf{V}}[:, i] \right). \quad (3)$$

A simple sum or average pooling does not introduce any new learnable parameters to the pipeline and is flexible to handle a variable number of conformations, enabling both single-state and multi-state design with the same model.

**Sequence decoding and loss function.** We feed the final encoder representations after pooling,  $S'$ ,  $\bar{V}'$ , to autoregressive GVP-GNN decoder layers to predict the probability of the four possible base identities (A, G, C, U) for each node/nucleotide. Decoding proceeds according to the RNA sequence order from the 5' end to 3' end. gRNAd is trained in a self-supervised manner by minimising a cross-entropy loss (with label smoothing value of 0.05) between the predicted probability distribution and the ground truth identity for each base. During training, we use autoregressive teacher forcing (Williams & Zipser, 1989) where the ground truth base identity is fed as input to the decoder at each step, encouraging the model to stay close to the ground-truth sequence.

**Sampling.** When using gRNAd for inference and designing new sequences, we iteratively sample the base identity for a given nucleotide from the predicted conditional probability distribution, given the partially designed sequence up until that nucleotide/decoding step. We can modulate the smoothness or sharpness of the probability distribution by using a temperature parameter. At lower temperatures, for instance  $\leq 1.0$ , we expect higher native sequence recovery and lower diversity in gRNAd's designs. At higher temperatures, the model produces more diverse designs by sampling from a smoothed probability distribution.

gRNAd can also use unordered decoding (Dauparas et al., 2022) with minimal impact on performance, as well as masking or logit biasing during sampling, depending on the design scenario at hand. This enables gRNAd to perform partial re-design of RNA sequences, retaining specified nucleotide identities while designing the rest of the sequence. Similar approaches for functional protein design have been shown to be successful in the wet lab (Sumida et al., 2024).

### 2.3 EVALUATION METRICS FOR DESIGNED SEQUENCES

In principle, inverse folding models can be sampled from to obtain a large number of designed sequences for a given backbone structure. Thus, in-silico metrics to determine which sequences are useful and which ones to prioritise in wet lab experiments are a critical part of the overall pipeline. We currently use the following metrics to evaluate gRNAd's designs, visualised in Figure 3:

- **Native sequence recovery**, which is the average percentage of native (ground truth) nucleotides correctly recovered in the sampled sequences. Recovery is the most widely used metric for biomolecule inverse design (Dauparas et al., 2022) but can be misleading in the case of RNAs where alternative nucleotide base pairings can form the same structural patterns.
- **Secondary structure self-consistency score**, where we 'forward fold' the sampled sequences using a secondary structure prediction tool (we used EternaFold (Wayment-Steele et al., 2022)) and measure the average Matthew's Correlation Coefficient (MCC) to the groundtruth secondary structure, represented as a binary adjacency matrix. MCC values range between -1 and +1, where +1 represents a perfect match, 0 an average random prediction and -1 an inverse prediction. This measures how well the designs recover base pairing patterns.
- **Tertiary structure self-consistency scores**, where we 'forward fold' the sampled sequences using a 3D structure prediction tool (we used RhoFold (Shen et al., 2022)) and compute the average RMSD, TM-score and GDT\_TS to the groundtruth C4' coordinates to measure how well the designs recover global structural similarity and 3D conformations.
- **Perplexity**, which can be thought of as the average number of bases that the model is selecting from for each nucleotide. Formally, perplexity is the average exponential of the negative log-likelihood of the sampled sequences. A 'perfect' model which regurgitates the groundtruth would have perplexity of 1, while a perplexity of 4 means that the model is making random predictions (the model outputs a uniform probability over 4 possible bases). Perplexity does not require a ground truth structure to calculate, and can also be used for ranking sequences as it is the model's estimate of the compatibility of a sequence with the input backbone structure.

**Significance and limitations.** Self-consistency metrics, termed 'designability' (eg.  $\text{scRMSD} \leq 2\text{\AA}$ ), as well as perplexity have been found to correlate with experimental success in protein design (Watson et al., 2023). While precise designability thresholds are yet to be established for RNA, pairs of structures with  $\text{TM-score} \geq 0.45$  or  $\text{GDT\_TS} \geq 0.5$  are known to correspond to roughly the same fold (Zhang et al., 2022). Another major limitation for in-silico evaluation of 3D RNA design compared to proteins is the relatively worse state of structure prediction tools (Schneider et al., 2023).

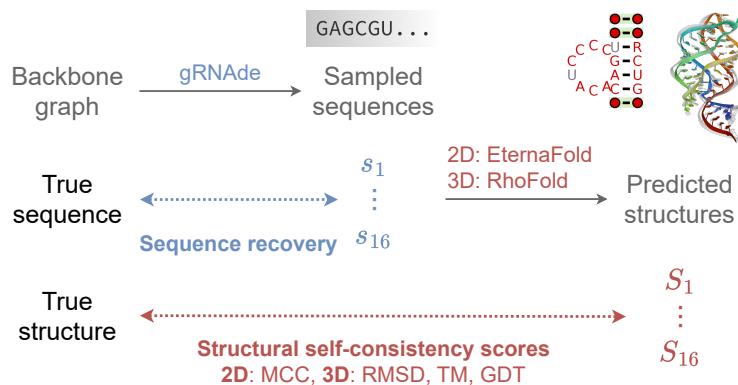


Figure 3: **In-silico evaluation metrics for gRNAdesigned sequences.** We consider (1) *sequence recovery*, the percentage of native nucleotides recovered in designed samples, (2) *self-consistency scores*, which are measured by ‘forward folding’ designed sequences using a structure predictor and measuring how well 2D and 3D structure are recovered (we use EternaFold and RhoFold for 2D/3D structure prediction, respectively). We also report (3) *perplexity*, the model’s estimate of the likelihood of a sequence given a backbone.

### 3 EXPERIMENTAL SETUP

**3D RNA structure dataset.** We create a machine learning-ready dataset for RNA inverse design using RNASolo (Adamczyk et al., 2022), a novel repository of RNA 3D structures extracted from solo RNAs, protein-RNA complexes, and DNA-RNA hybrids in the PDB. We used all currently known RNA structures at resolution  $\leq 4.0\text{\AA}$  resulting in 4,223 unique RNA sequences for which a total of 12,011 structures are available (RNASolo date cutoff: 31 October 2023). As inverse folding is a per-node/per-nucleotide level task, our training data contains over 2.8 Million unique nucleotides. Further dataset statistics are available in Appendix Figure 14, illustrating the diversity of our dataset in terms of sequence length, number of structures per sequence, as well as structural variations among conformations per sequence.

**Structural clustering.** In order to ensure that we evaluate gRNAdes’s generalization ability to novel RNAs, we cluster the 4,223 unique RNAs into groups based on structural similarity. We use US-align (Zhang et al., 2022) with a similarity threshold of TM-score  $>0.45$  for clustering, and ensure that we train, validate and test gRNAdes on structurally dissimilar clusters (see next paragraph). We also provide utilities for clustering based on sequence homology using CD-HIT (Fu et al., 2012), which leads to splits containing biologically dissimilar clusters of RNAs.

**Splits to evaluate generalization.** After clustering, we split the RNAs into training ( $\sim 4000$  samples), validation and test sets (100 samples each) to evaluate two different design scenarios:

1. **Single-state split.** This split is used to fairly evaluate gRNAdes for single-state design on a set of RNA structures of interest from the PDB identified by Das et al. (2010), which mainly includes riboswitches, aptamers, and ribozymes. We identify the structural clusters belonging to the RNAs identified in Das et al. (2010) and add all the RNAs in these clusters to the test set (100 samples). The remaining clusters are randomly added to the training and validation splits.
2. **Multi-state split.** This split is used to test gRNAdes’s ability to design RNA with multiple distinct conformational states. We order the structural clusters based on median intra-sequence RMSD among available structures within the cluster<sup>1</sup>. The top 100 samples from clusters with the highest median intra-sequence RMSD are added to the test set. The next 100 samples are added to the validation set and all remaining samples are used for training.

Validation and test samples come from clusters with at most 5 unique sequences, in order to ensure diversity. Any samples that were not assigned clusters are directly appended to the training set. We

<sup>1</sup>For each RNA sequence, we compute the pairwise C4’ RMSD among all available structures. We then compute the median RMSD across all sequences within each structural cluster.

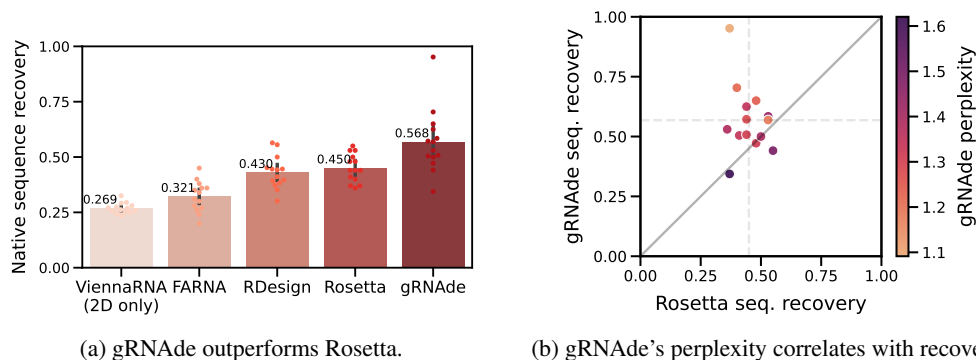


Figure 4: **gRNAde compared to Rosetta for single-state design.** (a) We benchmark native sequence recovery of gRNAde, RDesign, Rosetta, FARNA and ViennaRNA on 14 RNA structures of interest identified by [Das et al. \(2010\)](#). gRNAde obtains higher native sequence recovery rates (56% on average) compared to Rosetta (45%) and all other methods. (b) Sequence recovery per sample for Rosetta and gRNAde, shaded by gRNAde's perplexity for each sample. gRNAde's perplexity is correlated with native sequence recovery for designed sequences (Pearson correlation: -0.76, Spearman correlation: -0.67). Full results on single-state test set are available in [Appendix B](#) and per-RNA results in [Appendix Table 2](#).

also directly add very large RNAs (> 1000 nts) to the training set, as it is unlikely that we want to design very large RNAs. We exclude very short RNA strands (< 10 nts).

**Evaluation metrics.** For a given data split, we evaluate models on the held-out test set by designing 16 sequences (sampled at temperature 0.1) for each test data point and computing averages for each of the metrics described in [Section 2.3](#): native sequence recovery, structural self-consistency scores and perplexity. We employ early stopping by reporting test set performance for the model checkpoint for the epoch with the best validation set recovery. Standard deviations are reported across 3 consistent random seeds for all models.


**Hyperparameters.** All models use 4 encoder and 4 decoder GVP-GNN layers, with 128 scalar/16 vector node features, 64 scalar/4 vector edge features, and drop out probability 0.5, resulting in 2,147,944 trainable parameters. All models are trained for a maximum of 50 epochs using the Adam optimiser with an initial learning rate of 0.0001, which is reduced by a factor 0.9 when validation performance plateaus with patience of 5 epochs. Ablation studies of key modelling decisions are available in [Appendix Table 1](#).

## 4 RESULTS

### 4.1 SINGLE-STATE RNA DESIGN BENCHMARK

We set out to compare gRNAde to Rosetta, a state-of-the-art physically based toolkit for biomolecular modelling and design ([Leman et al., 2020](#)). We reproduced the benchmark setup from [Das et al. \(2010\)](#) for Rosetta's fixed backbone RNA sequence design workflow on 14 RNA structures of interest from the PDB, which mainly includes riboswitches, aptamers, and ribozymes (full listing in [Table 2](#)). We trained gRNAde on the single-state split detailed in [Section 3](#), explicitly excluding the 14 RNAs as well as any structurally similar RNAs in order to ensure that we fairly evaluate gRNAde's generalization abilities vs. Rosetta.

**gRNAde improves sequence recovery over Rosetta.** In [Figure 4](#), we compare gRNAde's native sequence recovery for single-state design with numbers taken from [Das et al. \(2010\)](#) for Rosetta, FARNA (a predecessor of Rosetta), ViennaRNA (the most popular 2D inverse folding method), and RDesign ([Tan et al., 2023](#)) (a concurrent GNN-based RNA inverse folding model). gRNAde has higher recovery of 56% on average compared to 45% for Rosetta, 32% for FARNA, 27% for ViennaRNA, and 43% for RDesign. See [Appendix Table 2](#) for per-RNA results and [Appendix B](#) for full results on the single-state test set of 100 RNAs.

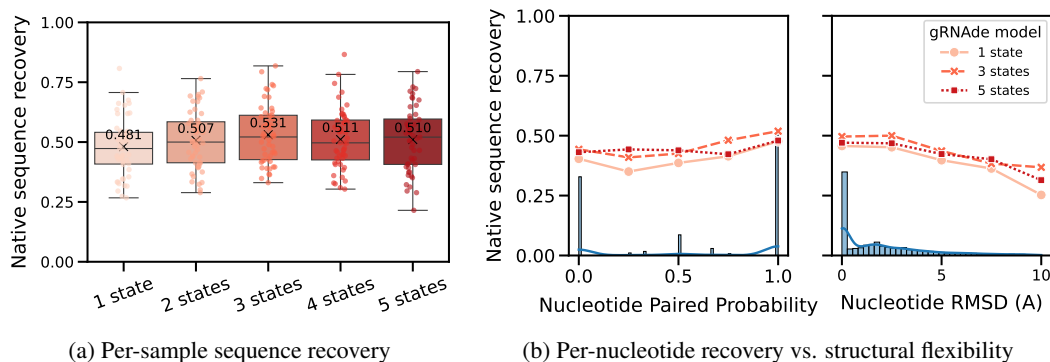

**Figure 5: Multi-state design benchmark.** (a) Multi-state gRNAd shows a consistent 3-5% improvement over the single-state variant in terms of sequence recovery on the multi-state test set of 100 RNAs, with the best performance obtained using 3 states. (b) When plotting sequence recovery per-nucleotide, multi-state gRNAd improves over a single-state model for structurally flexible regions of RNAs, as characterised by nucleotides that tend to undergo changes in base pairing (left) and nucleotides with higher average RMSD across multiple states (right). Marginal histograms in blue show the distribution of values. We plot performance for one consistent random seed across all models; collated results and ablations are available in [Appendix B](#).

**gRNAd is significantly faster than Rosetta.** In addition to superior sequence recovery, gRNAd is significantly faster than Rosetta for high-throughput design pipelines. Training gRNAd from scratch takes roughly 2–6 hours on a single A100 GPU, depending on the exact hyperparameters. Once trained, gRNAd can design hundreds of sequences for backbones with hundreds of nucleotides in  $\sim 10$  seconds on CPU and  $\sim 1$  second with GPU acceleration. On the other hand, Rosetta takes order of hours to produce a single design due to performing expensive Monte Carlo optimisation until convergence on CPU.<sup>2</sup> Deep learning methods like gRNAd are arguably easier to use since no expert customization is required and setup is easier compared to Rosetta (the latest builds do not include RNA recipes), making RNA design more broadly accessible.

**gRNAd’s perplexity correlates with sequence recovery.** In [Figure 4b](#), we plot native sequence recovery per sample for Rosetta vs. gRNAd, shaded by gRNAd’s average perplexity for each sample. Perplexity is an indicator of the model’s confidence in its own prediction (lower perplexity implies higher confidence) and appears to be correlated with native sequence recovery. In the subsequent [Section 4.3](#), we further demonstrate the utility of gRNAd’s perplexity for zero-shot ranking of RNA fitness landscapes.


## 4.2 MULTI-STATE RNA DESIGN BENCHMARK

Structured RNAs often adopt multiple distinct conformational states to perform biological functions ([Ken et al., 2023](#)). For instance, riboswitches adopt at least two distinct functional conformations: a ligand bound (holo) and unbound (apo) state, which helps them regulate and control gene expression ([Stagno et al., 2017](#)). If we were to attempt single-state inverse design for such RNAs, each backbone structure may lead to a different set of sampled sequences. It is not obvious how to select the input backbone as well as designed sequence when using single-state models for multi-state design. gRNAd’s multi-state GNN, described in [Section 2.2](#), directly ‘bakes in’ the multi-state nature of RNA into the architecture and designs sequences explicitly conditioned on multiple states.

In order to evaluate gRNAd’s multi-state design capabilities, we trained equivalent single-state and multi-state gRNAd models on the multi-state split detailed in [Section 3](#), where the validation and test sets contain progressively more structurally flexible RNAs as measured by median RMSD among multiple available states for an RNA.

<sup>2</sup>[Rosetta documentation](#) states that “runs on RNA backbones longer than  $\sim$ ten nucleotides take many minutes or hours”. We have not run Rosetta ourselves as recent builds do not include RNA recipes.



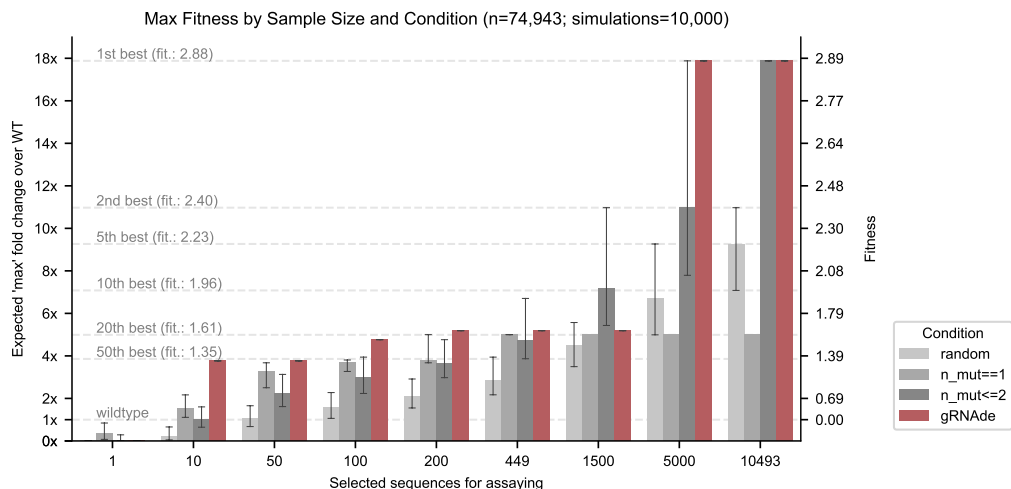

**Figure 6: Retrospective study of gRNAde for ranking ribozyme mutant fitness.** Using the backbone structure and mutational fitness landscape data from an RNA polymerase ribozyme (McRae et al., 2024), we retrospectively analyse how well we can rank variants at multiple design budgets using random selection vs. gRNAde’s perplexity for mutant sequences conditioned on the backbone structure (catalytic subunit 5TU). Note that gRNAde is used zero-shot here, i.e. it was not fine-tuned on any assay data. For stochastic strategies, bars indicate median values, and error bars indicate the interquartile range estimated from 10,000 simulations per strategy and design budget. At low throughput design budgets of up to  $\sim 500$  sequences, selecting mutants using gRNAde outperforms random baselines in terms of the expected maximum improvement in fitness over the wild type. In particular, gRNAde performs better than single site saturation mutagenesis, even when all single mutants are explored (total of 449 single mutants, 10,493 double mutants for the catalytic subunit 5TU in McRae et al. (2024)). See Appendix Figure 7 for results on scaffolding subunit t1.

**Multi-state gRNAde consistently boosts sequence recovery.** In Figure 5a, we compared a single-state variant of gRNAde with otherwise equivalent multi-state models (with up to 5 states) in terms of native sequence recovery. Multi-state variants show a consistent 3-5% improvement, with the best performance obtained using 3 states. This trend holds to a lesser extent on the single-state benchmark where the multi-state model is being used with only one state as input. This suggests that seeing multiple states during training can be useful for teaching gRNAde about RNA conformational flexibility and improve performance even for single-state design tasks. As a caveat, it is worth noting that multi-state models consume more GPU memory than an equivalent single-state model during mini-batch training (approximate peak GPU usage for max. number of states = 1: 12GB, 3: 28GB, 5: 50GB on a single A100 with at most 3000 total nodes in a mini-batch).

**Improved recovery in structurally flexible regions.** In Figure 5b, we evaluated gRNAde’s multi-state sequence recovery at a fine-grained, per-nucleotide level to understand the source of performance gains. Multi-state GNNs improve sequence recovery over the single-state variant on structurally flexible nucleotides, as characterised by undergoing changes in base pairing/secondary structure and higher average RMSD between 3D coordinates across states.

#### 4.3 ZERO-SHOT RANKING OF RNA FITNESS LANDSCAPE

Lastly, we explored the use of gRNAde as a zero-shot ranker of mutants in RNA engineering campaigns. Given the backbone structure of a wild type RNA of interest as well as a candidate set of mutant sequences, we can compute gRNAde’s perplexity of whether a given sequence folds into the backbone structure. Perplexity is inversely related to the likelihood of a sequence conditioned on a structure, as described in Section 2.3. We can then rank sequences based on how ‘compatible’ they are with the backbone structure in order to select a subset to be experimentally validated in wet labs.

**Retrospective analysis on ribozyme fitness landscape.** A recent study by [McRae et al. \(2024\)](#) determined a cryo-EM structure of a dimeric RNA polymerase ribozyme at 5Å resolution<sup>3</sup>, along with fitness landscapes of ~75K mutants for the catalytic subunit 5TU and ~48K mutants for the scaffolding subunit t1. We design a retrospective study using this data of (sequence, fitness value) pairs where we simulate an RNA engineering campaign with the aim of improving catalytic subunit fitness over the wild type 5TU sequence.

We consider various design budgets ranging from hundreds to thousands of sequences selected for experimental validation, and compare 4 unsupervised approaches for ranking/selecting variants: (1) random choice from all ~75,000 sequences; (2) random choice from all 449 single mutant sequences; (3) random choice from all single and double mutant sequences (as sequences with higher mutation order tend to be less fit); and (4) negative gRNAd perplexity (lower perplexity is better). For each design budget and ranking approach, we compute the expected maximum change in fitness over the wild type that could be achieved by screening as many variants as allowed in the given design budget. We run 10,000 simulations to compute confidence intervals for the 3 random baselines.

**gRNAd outperforms random baselines in low design budget scenarios.** [Figure 6](#) illustrates the results of our retrospective study. At low design budgets of up to hundreds of sequences, which are relevant in the case of a low throughput fitness screening assay, gRNAd outperforms all random baselines in terms of the maximum change in fitness over the wild type. The top 10 mutants as ranked by gRNAd contain a sequence with 4-fold improved fitness, while the top 200 leads to a 5-fold improvement. Note that gRNAd is used zero-shot here, i.e. it was not fine-tuned on any assay data.

Overall, it is promising that gRNAd's perplexity correlates with experimental fitness measurements out-of-the-box (zero-shot) and can be a useful ranker of mutant fitness in our retrospective study. In realistic design scenarios, improvements could likely be obtained by fine-tuning gRNAd on a low amount of experimental fitness data. For example, latent features from gRNAd may be finetuned or used as input to a prediction head with supervised learning on fitness landscape data.

## 5 CONCLUSION

We introduce gRNAd, a geometric deep learning pipeline for RNA sequence design conditioned on one or more 3D backbone structures. gRNAd represents a significant advance over physics-based Rosetta in terms of both computational and experimental performance, as well as inference speed and ease-of-use. Further, gRNAd enables explicit multi-state design for structurally flexible RNAs which was previously not possible with Rosetta. gRNAd's perplexity correlates with native sequence and structural recovery, and can be used for zero-shot ranking of mutants in RNA engineering campaigns. gRNAd is also the first geometric deep learning architecture for multi-state biomolecule representation learning; the model is generic and can be repurposed for other learning tasks on conformational ensembles, including multi-state protein design.

**Limitations.** Key avenues for future development of gRNAd include supporting multiple interacting chains, accounting for partner molecules with RNAs, and supporting negative design against undesired conformations. We discuss practical tradeoffs to using gRNAd in real-world RNA design scenarios in [Appendix F](#), including limitations due to the current state of 3D RNA structure prediction tools.

## ACKNOWLEDGEMENTS

We would like to thank Roger Foo, Phillip Holliger, Alex Borodavka, Rhiju Das, Janusz Bujnicki, Edoardo Gianni, Ben Porebski, Michael Mohsen, Christian Choe, and John Boom for helpful comments and discussions. CKJ was supported by the A\*STAR Singapore National Science Scholarship (PhD). SVM was supported by the UKRI Centre for Doctoral Training in Application of Artificial Intelligence to the study of Environmental Risks (EP/S022961/1). AM was supported by a U.S. NSF grant (DBI2308699) and two U.S. NIH grants (R01GM093123 and R01GM146340). This research was partially supported by Google TPU Research Cloud and Cambridge Dawn Supercomputer Pioneer Project compute grants.

<sup>3</sup>This RNA was not present in gRNAd's training data, which contains structures at  $\leq 4.0\text{\AA}$  resolution.

## REFERENCES

- Bartosz Adamczyk, Maciej Antczak, and Marta Szachniuk. Rnasolo: a repository of cleaned pdb-derived rna 3d structures. *Bioinformatics*, 2022.
- Minkyung Baek, Frank DiMaio, Ivan Anishchenko, Justas Dauparas, Sergey Ovchinnikov, Gyu Rie Lee, Jue Wang, Qian Cong, Lisa N Kinch, R Dustin Schaeffer, et al. Accurate prediction of protein structures and interactions using a three-track neural network. *Science*, 2021.
- Minkyung Baek, Ryan McHugh, Ivan Anishchenko, Hanlun Jiang, David Baker, and Frank DiMaio. Accurate prediction of protein–nucleic acid complexes using rosettafoldna. *Nature Methods*, 2024.
- Edouard Bonnet, Pawel Rzazewski, and Florian Sikora. Designing rna secondary structures is hard. *Journal of Computational Biology*, 2020.
- Michael M Bronstein, Joan Bruna, Taco Cohen, and Petar Velickovic. Geometric deep learning: Grids, groups, graphs, geodesics, and gauges. *arXiv preprint*, 2021.
- Jiayang Chen, Zhihang Hu, Siqi Sun, Qingxiong Tan, Yixuan Wang, Qinze Yu, Licheng Zong, Liang Hong, Jin Xiao, Tao Shen, et al. Interpretable rna foundation model from unannotated data for highly accurate rna structure and function predictions. *arXiv preprint*, 2022.
- Alexander Churkin, Matan Drory Retwitzer, Vladimir Reinharz, Yann Ponty, Jérôme Waldispühl, and Danny Barash. Design of rnas: comparing programs for inverse rna folding. *Briefings in bioinformatics*, 2018.
- Tulsi Ram Damase, Roman Sukhovshin, Christian Boada, Francesca Taraballi, Roderic I Pettigrew, and John P Cooke. The limitless future of rna therapeutics. *Frontiers in bioengineering and biotechnology*, 2021.
- Rhiju Das, John Karanicolas, and David Baker. Atomic accuracy in predicting and designing noncanonical rna structure. *Nature methods*, 2010.
- Justas Dauparas, Ivan Anishchenko, Nathaniel Bennett, Hua Bai, Robert J Ragotte, Lukas F Milles, Basile IM Wicky, et al. Robust deep learning based protein sequence design using proteinmpnn. *Science*, 2022.
- Wayne K Dawson, Maciej Maciejczyk, Elzbieta J Jankowska, and Janusz M Bujnicki. Coarse-grained modeling of rna 3d structure. *Methods*, 2016.
- Kieran Didi, Francisco Vargas, Simon Mathis, Vincent Dutoir, Emile Mathieu, Urszula Julia Komorowska, and Pietro Lio. A framework for conditional diffusion modelling with applications in motif scaffolding for protein design. In *NeurIPS 2023 Machine Learning for Structural Biology Workshop*, 2023.
- Jennifer A Doudna and Emmanuelle Charpentier. The new frontier of genome engineering with crispr-cas9. *Science*, 2014.
- Alexandre Duval, Simon V Mathis, Chaitanya K Joshi, Victor Schmidt, Santiago Miret, Fragkiskos D Malliaros, Taco Cohen, Pietro Lio, Yoshua Bengio, and Michael Bronstein. A hitchhiker’s guide to geometric gnns for 3d atomic systems. *arXiv preprint*, 2023.
- Michele Felletti, Julia Stifel, Lena A Wurmthaler, Sophie Geiger, and Jorg S Hartig. Twister ribozymes as highly versatile expression platforms for artificial riboswitches. *Nature communications*, 2016.
- Matthias Fey and Jan Eric Lenssen. Fast graph representation learning with pytorch geometric. *ICLR 2019 Representation Learning on Graphs and Manifolds Workshop*, 2019.
- Limin Fu, Beifang Niu, Zhengwei Zhu, Sitao Wu, and Weizhong Li. Cd-hit: accelerated for clustering the next-generation sequencing data. *Bioinformatics*, 2012.
- Laura R Ganser, Megan L Kelly, Daniel Herschlag, and Hashim M Al-Hashimi. The roles of structural dynamics in the cellular functions of rnas. *Nature reviews Molecular cell biology*, 2019.
- Dongran Han, Xiaodong Qi, Cameron Myhrvold, Bei Wang, Mingjie Dai, Shuoxing Jiang, Maxwell Bates, Yan Liu, Byoungkwon An, Fei Zhang, et al. Single-stranded dna and rna origami. *Science*, 2017.
- Shujun He, Rui Huang, Jill Townley, Rachael C Kretsch, Thomas G Karagianes, David BT Cox, Hamish Blair, Dmitry Penzar, Valeriy Vyaltsev, Elizaveta Aristova, et al. Ribonanza: deep learning of rna structure through dual crowdsourcing. *bioRxiv*, 2024.
- Janis Hoetzel and Beatrix Suess. Structural changes in aptamers are essential for synthetic riboswitch engineering. *Journal of Molecular Biology*, 2022.

- Po-Ssu Huang, Scott E Boyken, and David Baker. The coming of age of de novo protein design. *Nature*, 2016.
- John Ingraham, Vikas Garg, Regina Barzilay, and Tommi Jaakkola. Generative models for graph-based protein design. *NeurIPS*, 2019.
- John B Ingraham, Max Baranov, Zak Costello, Karl W Barber, Wujie Wang, Ahmed Ismail, Vincent Frappier, Dana M Lord, Christopher Ng-Thow-Hing, Erik R Van Vlack, et al. Illuminating protein space with a programmable generative model. *Nature*, 2023.
- Bowen Jing, Stephan Eismann, Patricia Suriana, Raphael John Lamarre Townshend, and Ron Dror. Learning from protein structure with geometric vector perceptrons. In *International Conference on Learning Representations*, 2020.
- Chaitanya K. Joshi, Cristian Bodnar, Simon V. Mathis, Taco Cohen, and Pietro Lio. On the expressive power of geometric graph neural networks. In *International Conference on Machine Learning*, 2023.
- John Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ronneberger, Kathryn Tunyasuvunakool, Russ Bates, Augustin Zidek, Anna Potapenko, et al. Highly accurate protein structure prediction with alphafold. *Nature*, 2021.
- Megan L Ken, Rohit Roy, Ainan Geng, Laura R Ganser, Akanksha Manghrani, Bryan R Cullen, Ursula Schulze-Gahmen, Daniel Herschlag, and Hashim M Al-Hashimi. Rna conformational propensities determine cellular activity. *Nature*, 2023.
- Julia Koehler Leman, Brian D Weitzner, Steven M Lewis, Jared Adolf-Bryfogle, Nawsad Alam, Rebecca F Alford, Melanie Aprahamian, David Baker, Kyle A Barlow, Patrick Barth, et al. Macromolecular modeling and design in rosetta: recent methods and frameworks. *Nature methods*, 2020.
- Kathrin Leppek, Rhiju Das, and Maria Barna. Functional 5' utr mRNA structures in eukaryotic translation regulation and how to find them. *Nature reviews Molecular cell biology*, 2018.
- Sizhen Li, Saeed Moayedpour, Ruijiang Li, Michael Bailey, Saleh Riahi, Lorenzo Kogler-Anele, Milad Miladi, Jacob Miner, Dinghai Zheng, Jun Wang, et al. Codonbert: Large language models for mRNA design and optimization. *bioRxiv*, 2023a.
- Yang Li, Chengxin Zhang, Chenjie Feng, Robin Pearce, P Lydia Freddolino, and Yang Zhang. Integrating end-to-end learning with deep geometrical potentials for ab initio rna structure prediction. *Nature Communications*, 2023b.
- Maumita Mandal and Ronald R Breaker. Gene regulation by riboswitches. *Nature reviews Molecular cell biology*, 2004.
- Ewan KS McRae, Christopher JK Wan, Emil L Kristoffersen, Kalinka Hansen, Edoardo Gianni, Isaac Gallego, Joseph F Curran, James Attwater, Philipp Holliger, and Ebbe S Andersen. Cryo-em structure and functional landscape of an rna polymerase ribozyme. *Proceedings of the National Academy of Sciences*, 2024.
- Mihir Metkar, Christopher S Pepin, and Melissa J Moore. Tailor made: the art of therapeutic mRNA design. *Nature Reviews Drug Discovery*, 2024.
- Michael G Mohsen, Matthew K Midy, Aparajita Balaji, and Ronald R Breaker. Exploiting natural riboswitches for aptamer engineering and validation. *Nucleic Acids Research*, 2023.
- Kamila Mustafina, Keisuke Fukunaga, and Yohei Yokobayashi. Design of mammalian on-riboswitches based on tandemly fused aptamer and ribozyme. *ACS Synthetic Biology*, 2019.
- Rafael Josip Penic, Tin Vlastic, Roland G Huber, Yue Wan, and Mile Sikic. Rinalmo: General-purpose rna language models can generalize well on structure prediction tasks. *arXiv preprint*, 2024.
- Frederic Runge, Danny Stoll, Stefan Falkner, and Frank Hutter. Learning to design RNA. In *ICLR*, 2019.
- Bohdan Schneider, Blake Alexander Sweeney, Alex Bateman, Jiri Cerny, Tomasz Zok, and Marta Szachniuk. When will rna get its alphafold moment? *Nucleic Acids Research*, 2023.
- Tao Shen, Zhihang Hu, Zhangzhi Peng, Jiayang Chen, Peng Xiong, Liang Hong, Liangzhen Zheng, Yixuan Wang, Irwin King, Sheng Wang, et al. E2efold-3d: End-to-end deep learning method for accurate de novo rna 3d structure prediction. *arXiv preprint*, 2022.
- JR Stagno, Y Liu, YR Bhandari, CE Conrad, S Panja, Mamata Swain, L Fan, Gerald Nelson, C Li, DR Wendel, et al. Structures of riboswitch rna reaction states by mix-and-inject xfel serial crystallography. *Nature*, 2017.

- Kiera H Sumida, Reyes Nunez-Franco, Indrek Kalvet, Samuel J Pellock, Basile IM Wicky, Lukas F Milles, Justas Dauparas, Jue Wang, Yakov Kipnis, Noel Jameson, et al. Improving protein expression, stability, and function with proteinmpnn. *Journal of the American Chemical Society*, 2024.
- Cheng Tan, Yijie Zhang, Zhangyang Gao, Hanqun Cao, and Stan Z Li. Hierarchical data-efficient representation learning for tertiary structure-based rna design. *arXiv preprint*, 2023.
- Raphael JL Townshend, Stephan Eismann, Andrew M Watkins, Ramya Rangan, Maria Karelina, Rhiju Das, and Ron O Dror. Geometric deep learning of rna structure. *Science*, 2021.
- Quentin Vicens and Jeffrey S Kieft. Thoughts on how to think (and talk) about rna structure. *Proceedings of the National Academy of Sciences*, 2022.
- Leven M Wadley, Kevin S Keating, Carlos M Duarte, and Anna Marie Pyle. Evaluating and learning from rna pseudotorsional space: quantitative validation of a reduced representation for rna structure. *Journal of molecular biology*, 2007.
- Wenkai Wang, Chenjie Feng, Renmin Han, Ziyi Wang, Lisha Ye, Zongyang Du, Hong Wei, Fa Zhang, Zhenling Peng, and Jianyi Yang. trrosettarna: automated prediction of rna 3d structure with transformer network. *Nature Communications*, 2023.
- Max Ward, Eliot Courtney, and Elena Rivas. Fitness functions for rna structure design. *Nucleic Acids Research*, 2023.
- Andrew Martin Watkins, Ramya Rangan, and Rhiju Das. Farfar2: improved de novo rosetta prediction of complex global rna folds. *Structure*, 2020.
- Joseph L Watson, David Juergens, Nathaniel R Bennett, Brian L Trippe, Jason Yim, Helen E Eisenach, Woody Ahern, Andrew J Borst, Robert J Ragotte, Lukas F Milles, et al. De novo design of protein structure and function with rfdiffusion. *Nature*, 2023.
- Hannah K Wayment-Steele, Wipapat Kladwang, Alexandra I Strom, Jeehyung Lee, Adrien Treuille, Alex Becka, Eterna Participants, and Rhiju Das. Rna secondary structure packages evaluated and improved by high-throughput experiments. *Nature methods*, 2022.
- Ronald J Williams and David Zipser. A learning algorithm for continually running fully recurrent neural networks. *Neural computation*, 1989.
- Joseph D Yesselman, Daniel Eiler, Erik D Carlson, Michael R Gotrik, Anne E d' Aquino, Alexandra N Ooms, Wipapat Kladwang, Paul D Carlson, Xuesong Shi, David A Costantino, et al. Computational design of three-dimensional rna structure and function. *Nature nanotechnology*, 2019.
- Manzil Zaheer, Satwik Kottur, Siamak Ravanbakhsh, Barnabas Poczos, Russ R Salakhutdinov, and Alexander J Smola. Deep sets. *NeurIPS*, 2017.
- Chengxin Zhang, Morgan Shine, Anna Marie Pyle, and Yang Zhang. Us-align: universal structure alignments of proteins, nucleic acids, and macromolecular complexes. *Nature methods*, 2022.
- Yiran Zhu, Liyuan Zhu, Xian Wang, and Hongchuan Jin. Rna-based therapeutics: An overview and prospectus. *Cell Death & Disease*, 2022.

---

## APPENDICES

<b>A Related Work</b>	<b>14</b>
<b>B Ablation Study</b>	<b>15</b>
<b>C Additional Results</b>	<b>17</b>
<b>D 3D Visualisation of gRNAdesigns</b>	<b>18</b>
<b>E Additional Figures</b>	<b>20</b>
<b>F FAQs on using gRNAdesign</b>	<b>23</b>

## A RELATED WORK

We attempt to briefly summarise recent developments in RNA structure modelling and design, with an emphasis on deep learning-based approaches.

**RNA inverse folding.** Most tools for RNA inverse folding focus on secondary structure without considering 3D geometry (Churkin et al., 2018; Runge et al., 2019) and approach the problem from the lens of energy optimisation (Ward et al., 2023). Rosetta fixed backbone re-design (Das et al., 2010) is the only energy optimisation-based approach that accounts for 3D structure. Deep neural networks such as gRNAdesign can incorporate 3D structural constraints and are orders of magnitude faster than optimisation-based approaches; this is particularly attractive for high-throughput design pipelines as solving the inverse folding optimisation problem is NP hard (Bonnet et al., 2020).

**RNA structure design.** Inverse folding models for protein design have often been coupled with backbone generation models which design structural backbones conditioned on various design constraints (Watson et al., 2023; Ingraham et al., 2023; Didi et al., 2023). Current approaches for RNA backbone design use classical (non-learned) algorithms for aligning 3D RNA motifs (Han et al., 2017; Yesselman et al., 2019), which are small modular pieces of RNA that are believed to fold independently. Such algorithms may be restricted by the use of hand-crafted heuristics and we plan to explore data-driven generative models for RNA backbone design in future work.

**RNA structure prediction.** There have been several recent efforts to adapt protein folding architectures such as AlphaFold2 (Jumper et al., 2021) and RosettaFold (Baek et al., 2021) for RNA structure prediction (Li et al., 2023b; Wang et al., 2023; Baek et al., 2024). A previous generation of models used GNNs as ranking functions together with Rosetta energy optimisation (Watkins et al., 2020; Townshend et al., 2021). None of these architectures aim at capturing conformational flexibility of RNAs, unlike gRNAdesign which represents RNAs as multi-state conformational ensembles. Neither can structure prediction tools be used for RNA design tasks as they are not generative models.

**RNA language models.** Self-supervised language models have been developed for predictive and generative tasks on RNA sequences, including general-purpose models such as RNA FM (Chen et al., 2022) and RiNaLMo (Penic et al., 2024) as well as mRNA-specific CodonBERT (Li et al., 2023a). RNA sequence data repositories are orders of magnitude larger than those for RNA structure (eg. RiNaLMo is trained on 36 million sequences). However, standard language models can only implicitly capture RNA structure and dynamics through sequence co-occurrence statistics, which can pose a challenge for designing structured RNAs such as riboswitches, aptamers, and ribozymes. RibonanzaNet (He et al., 2024) represents a recent effort in developing structure-informed RNA language models by supervised training on experimental readouts from chemical mapping, although RibonanzaNet cannot be used for RNA design. Inverse folding methods like gRNAdesign are language models conditioned on 3D structure, making them a natural choice for structure-based design.

Table 1: Ablation study and aggregated benchmark results for gRNAd. We report metrics averaged over 100 test sets samples and standard deviations across 3 consistent random seeds. The percentages reported in brackets for the 3D self-consistency scores are the percentage of designed samples within the ‘designability’ threshold values ( $scRMSD \leq 2\text{\AA}$ ,  $scTM \geq 0.45$ ,  $scGDT \geq 0.5$ ).

Split	Max. #states	Model	GNN	Max. train length	Perplexity ( $\downarrow$ )	Native seq. recovery ( $\uparrow$ )	Self-consistency metrics				
							2D – EternaFold scMCC ( $\uparrow$ )	scRMSD ( $\downarrow$ )	3D – RhoFold scTM-score ( $\uparrow$ )	scGDT_TS ( $\uparrow$ )	
Single-state split	1	AR	Equiv	500	1.77±0.07	0.438±0.01	0.624±0.07	13.01±1.18 (0.5%)	0.21±0.0 (14.3%)	0.22±0.0 (12.7%)	
	1	AR	Equiv	1000	1.73±0.08	0.453±0.01	0.648±0.01	13.10±0.58 (1.0%)	0.20±0.0 (10.8%)	0.21±0.0 (10.6%)	
	1	AR	Equiv	2500	1.41±0.01	0.513±0.01	0.633±0.03	11.76±0.91 (1.4%)	0.27±0.0 (28.8%)	0.27±0.0 (28.0%)	
	1	AR	Equiv	5000	1.29±0.02	0.538±0.03	0.612±0.02	11.50±0.64 (1.9%)	0.28±0.0 (32.1%)	0.28±0.0 (26.2%)	
	1	AR, rand	Equiv	5000	1.59±0.16	0.531±0.04	0.621±0.04	11.87±1.06 (1.9%)	0.26±0.0 (28.1%)	0.26±0.0 (24.1%)	
	1	AR	Inv	5000	1.32±0.04	0.531±0.01	0.585±0.03	11.70±0.56 (1.3%)	0.26±0.0 (24.8%)	0.25±0.0 (20.1%)	
	1	NAR	Inv	5000	1.54±0.04	0.571±0.00	0.430±0.02	14.26±0.51 (1.3%)	0.19±0.0 (15.9%)	0.18±0.0 (12.7%)	
	1	NAR	Equiv	5000	1.46±0.06	0.584±0.00	0.473±0.02	13.04±0.88 (1.3%)	0.23±0.0 (24.0%)	0.22±0.0 (17.9%)	
	3	AR	Equiv, DS	5000	1.23±0.05	0.539±0.01	0.620±0.01	11.47±1.05 (2.5%)	0.28±0.0 (31.4%)	0.28±0.0 (27.2%)	
	5	AR	Equiv, DS	5000	1.25±0.01	0.539±0.02	0.596±0.03	11.90±1.00 (2.9%)	0.27±0.0 (31.6%)	0.26±0.0 (26.4%)	
	Groundtruth sequence prediction baseline:					-	1.000±0.00	0.686±0.00	5.23±0.07 (27.9%)	0.56±0.0 (68.7%)	0.55±0.0 (68.7%)
	Random sequence prediction baseline:					-	0.251±0.00	0.012±0.00	24.40±0.34 (0.0%)	0.04±0.0 (0.0%)	0.02±0.0 (0.0%)
	ViennaRNA 2D-only baseline:					-	0.259±0.00	0.611±0.00	20.34±0.10 (0.0%)	0.07±0.0 (0.6%)	0.07±0.0 (1.1%)
Multi-state split	1	AR	Equiv	5000	1.51±0.01	0.481±0.00	0.573±0.04	21.83±0.53 (0.0%)	0.12±0.0 (2.6%)	0.15±0.0 (5.5%)	
	3	AR	Equiv, DS	500	1.87±0.04	0.444±0.01	0.587±0.02	22.09±0.13 (0.0%)	0.12±0.0 (2.3%)	0.14±0.0 (5.7%)	
	3	AR	Equiv, DS	1000	1.76±0.04	0.455±0.03	0.504±0.04	22.92±1.43 (0.0%)	0.11±0.0 (2.3%)	0.14±0.0 (5.8%)	
	3	AR	Equiv, DS	2500	1.54±0.07	0.500±0.01	0.543±0.01	22.00±0.26 (0.0%)	0.11±0.0 (2.9%)	0.14±0.0 (3.7%)	
	3	AR	Equiv, DS	5000	1.44±0.04	0.531±0.00	0.573±0.03	22.19±0.28 (0.0%)	0.12±0.0 (4.2%)	0.15±0.0 (7.5%)	
	3	AR	Equiv, DSS	5000	1.37±0.04	0.540±0.03	0.574±0.03	22.20±0.43 (0.0%)	0.12±0.0 (4.0%)	0.15±0.0 (7.5%)	
	5	AR	Equiv, DS	5000	1.37±0.03	0.510±0.00	0.514±0.00	21.80±0.08 (0.0%)	0.12±0.0 (2.9%)	0.14±0.0 (6.2%)	
	1	NAR	Equiv	5000	1.81±0.03	0.489±0.00	0.372±0.03	24.18±0.63 (0.0%)	0.09±0.0 (2.2%)	0.12±0.0 (4.7%)	
	3	NAR	Equiv, DS	5000	1.65±0.13	0.506±0.01	0.346±0.02	24.06±0.43 (0.0%)	0.08±0.0 (2.0%)	0.11±0.0 (2.9%)	
	3	NAR	Equiv, DSS	5000	1.60±0.10	0.520±0.02	0.352±0.03	24.18±0.55 (0.0%)	0.09±0.0 (2.2%)	0.12±0.0 (4.7%)	
	5	NAR	Equiv, DS	5000	1.59±0.21	0.517±0.01	0.339±0.01	24.16±0.75 (0.0%)	0.08±0.0 (2.2%)	0.10±0.0 (4.5%)	
	Groundtruth sequence prediction baseline:					-	1.000±0.00	0.525±0.00	17.52±0.32 (3.9%)	0.25±0.0 (24.2%)	0.29±0.0 (31.4%)
	Random sequence prediction baseline:					-	0.249±0.00	0.013±0.00	31.00±0.20 (0.0%)	0.03±0.0 (0.0%)	0.02±0.0 (0.0%)
ViennaRNA 2D-only baseline:					-	0.258±0.00	0.470±0.00	29.10±0.00 (0.0%)	0.05±0.0 (0.0%)	0.05±0.0 (0.0%)	

## B ABLATION STUDY

Table 1 presents an ablation study as well as aggregated benchmark for various configurations of gRNAd. Key takeaways are highlighted below. Note that all results in the main paper are reported for models trained on the maximum length of 5000 nucleotides using autoregressive decoding and rotation-equivariant GNN layers, as this lead to the lowest perplexity values.

**Split.** Single- and multi-state splits are described in Section 3; the multi-state split is relatively harder than the single-state split based on overall reduced performance for all baselines and models. The multi-state split evaluates a particularly challenging o.o.d. scenario as the RNAs in the test set have significantly higher structural flexibility compared to those in the training set.

**Max. #states** We evaluate the impact of increasing the maximum number of states as input to gRNAd. Multi-state models improve native sequence recovery as well as structural self-consistency scores over an equivalent single state variant. Notably, on the more challenging multi-state split, the improvement in sequence recovery was observed to be as high as 5-6% for the best multi-state models. This trend holds even for the single-state benchmark where the multi-state model is being used with only one state as input. This suggests that seeing multiple states during training can be useful for teaching gRNAd about RNA conformational flexibility and improve performance even for single-state design tasks.

**GNN and pooling architecture** We ablated whether the internal representations of the GVP-GNN are rotation invariant or equivariant. Equivariant GNNs are theoretically more expressive (Joshi et al., 2023) and we find them more capable at fitting the training distribution (as shown by lower perplexity) which in turn results in improved metrics compared to invariant GNNs.

**Model and decoder** ‘AR’ implies autoregressive decoding (described in Section 2.2, uses 4 encoder and 4 decoder layers), while ‘NAR’ implies non-autoregressive, one-shot decoding using an MLP (uses 8 encoder layers). Across both evaluation splits, AR models show significantly higher self-consistency scores than NAR, even though NAR lead to higher sequence recovery for the single-state split. AR is more expressive and can condition predictions at each decoding step on past predictions,

while one-shot NAR samples from independent probability distributions for each nucleotide. Thus, AR is a better inductive bias for predicting base pairing and base stacking interactions that are drivers of RNA structure (Vicens & Kieft, 2022). For instance, G-C and A-U pairs can often be swapped for one another, but non-autoregressive decoding does not capture such paired constraints.

Additionally, we also present results for the impact of training gRNAd with random decoding order. This can be practically very useful for partial or conditional design scenarios, and leads to a minor reduction in sequence recovery and 3D self-consistency (in line with what was observed for ProteinMPNN).

**Max. train RNA length** Limiting the maximum length of RNAs used for training can be seen as ablating the use of ribosomal RNA families (which are thousands of nucleotides long and form complexes with specialised ribosomal proteins). We find that training on only short RNAs fewer than 1000s of nucleotides leads to worse sequence recovery and 3D self-consistency scores, even though it improves 2D self-consistency across both evaluation splits. This suggests that tertiary interactions learnt from ribosomal RNAs can generalise to other RNA families to some extent (large ribosomal RNAs were excluded from test sets).

**Non-learnt baselines.** We report the performance of two non-learnt baselines to contextualise gRNAd's performance: for each test sample, simply predicting the groundtruth sequence back and predicting a random sequence. Structural self-consistency scores for the Groundtruth baseline provides a rough upper bounds on the maximum score that any gRNAd designs can theoretically obtain given the current state of 2D/3D structure predictors being used. gRNAd always performs better than the random baseline and often reaches 2D self-consistency scores close to the upper bound. Both 2D and 3D self-consistency scores are inherently limited by the performance of the structure prediction methods used.

**2D inverse folding baseline.** We additionally report results for ViennaRNA's 2D-only inverse folding method to further demonstrate the utility of 3D inverse folding. ViennaRNA has improved 2D self-consistency scores over gRNAd but fails to capture tertiary interactions in its designs, as evident by poor recovery and 3D self-consistency scores similar to the random baseline. We observed the same trend for other 2D-only inverse folding methods such as NuPack's design tool. This result should not be surprising, as 2D tools are meant for design scenarios that only involve base pairing and do not take any 3D information into account.

**Choice of structure predictors.** As previously noted, self-consistency metrics are highly dependent on the performance of the structure prediction method used. We chose EternaFold as it is simple to use as well as validated for *designed* and synthetic RNAs, unlike most other 2D structure prediction tools. Replacing EternaFold with RNAFold lead to unchanged results and did not modify the relative rankings of the models:

- AR, 1 state, Equiv. GNN, EternaFold scMCC:  $0.612 \pm 0.02$ , RNAFold scMCC:  $0.614 \pm 0.03$ .
- NAR, 1 state, Equiv. GNN, EternaFold scMCC:  $0.473 \pm 0.02$ , RNAFold scMCC:  $0.477 \pm 0.04$ .

Lastly, we would like to note the challenge of evaluating multi-state design: Structural self-consistency metrics are not ideal for evaluating RNAs which do not have one fixed structure/undergo changes to their structure. It would be ideal (but extremely slow and expensive) to run MD simulations to validate multi-state design models.



## C ADDITIONAL RESULTS

Table 2: Full results for Figure 4 comparing gRNAde to Rosetta, FARNa, ViennaRNA and RDesign for single-state design on 14 RNA structures of interest identified by Das et al. (2010). Rosetta and FARNa recovery values are taken from Das et al. (2010), Supplementary Table 2.

PDB ID	Description	ViennaRNA	FARNa	RDesign	Rosetta	gRNAde (single-state)		
		Recovery	Recovery	Recovery	Recovery	Recovery	Perplexity	2D self-cons.
1CSL	RRE high affinity site	0.25	0.20	0.4455	0.44	0.5719	1.2812	0.8644
1ET4	Vitamin B12 binding RNA aptamer	0.25	0.34	0.3929	0.44	0.6250	1.3457	-0.0135
1F27	Biotin-binding RNA pseudoknot	0.30	0.36	0.3013	0.37	0.3437	1.6203	0.4523
1L2X	Viral RNA pseudoknot	0.24	0.45	0.3727	0.48	0.4721	1.3181	0.5692
1LNT	RNA internal loop of SRP	0.33	0.27	0.5556	0.53	0.5843	1.4337	0.1379
1Q9A	Sarcin/ricin domain from E.coli 23S rRNA	0.27	0.40	0.4417	0.41	0.5044	1.3411	0.0597
4FE5	Guanine riboswitch aptamer	0.29	0.28	0.4112	0.36	0.5300	1.3824	0.9116
1X9C	All-RNA hairpin ribozyme	0.26	0.31	0.3967	0.50	0.5000	1.3905	0.6630
1XPE	HIV-1 B RNA dimerization initiation site	0.27	0.24	0.3834	0.40	0.7037	1.2177	0.7768
2GCS	Pre-cleavage state of glmS ribozyme	0.25	0.26	0.4518	0.44	0.5078	1.3053	0.4062
2GDI	Thiamine pyrophosphate-specific riboswitch	0.25	0.38	0.3523	0.48	0.6500	1.2363	-0.0251
2OEU	Junctionless hairpin ribozyme	0.23	0.30	0.5000	0.37	0.9519	1.0913	0.7768
2R8S	Tetrahymena ribozyme P4-P6 domain	0.27	0.36	0.5641	0.53	0.5689	1.1881	0.7281
354D	Loop E from E. coli 5S rRNA	0.28	0.35	0.4458	0.55	0.4410	1.4938	0.0430
Overall recovery:		0.27	0.32	0.4296	0.45	0.5682		

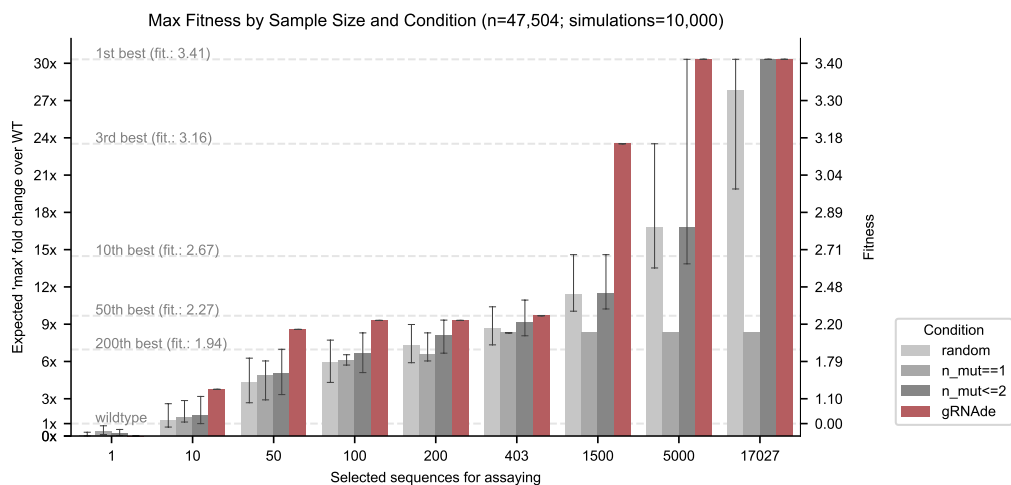


Figure 7: **Retrospective study of gRNAde for ranking ribozyme mutant fitness (t1 subunit).** Using the backbone structure and mutational fitness landscape data from an RNA polymerase ribozyme (McRae et al., 2024), we retrospectively analyse how well we can rank variants at multiple design budgets using random selection vs. gRNAde's perplexity for mutant sequences conditioned on the backbone structure (scaffolding subunit t1). gRNAde performs better than single site saturation mutagenesis, even when all single mutants are explored (total of 403 single mutants, 17,027 double mutants for the scaffolding subunit t1 in McRae et al. (2024)). See Section 4.3 for results on catalytic subunit 5TU and further discussions.

## D 3D VISUALISATION OF GRNADE DESIGNS

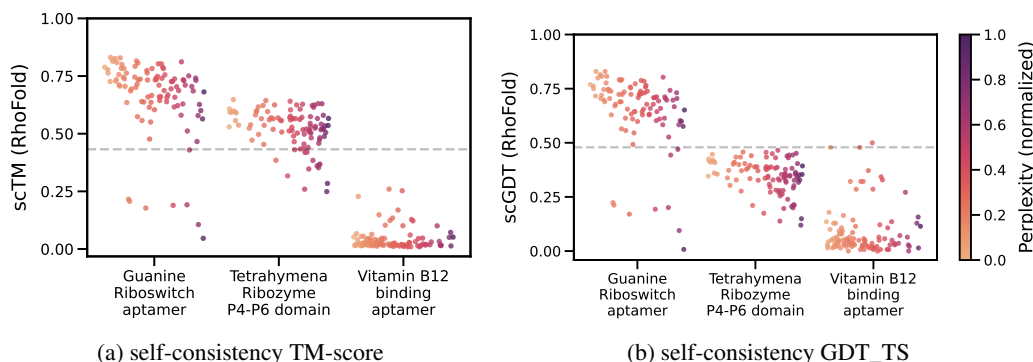


Figure 8: **3D self-consistency scores for 3 representative RNAs from Das et al. (2010)**. We use RhoFold to ‘forward fold’ 100 designs sampled at temperature = 0.5 and plot self-consistency TM-score and GDT\_TS. Each dot corresponds to one designed sequence and is coloured by gRNade’s perplexity (normalised per RNA). Designs with lower relative perplexity generally have higher 3D self-consistency and can be considered more ‘designable’. Dotted lines represent TM-score and GDT\_TS thresholds of 0.45 and 0.50, respectively. Pairs of structures scoring higher than the threshold correspond to roughly the same fold.


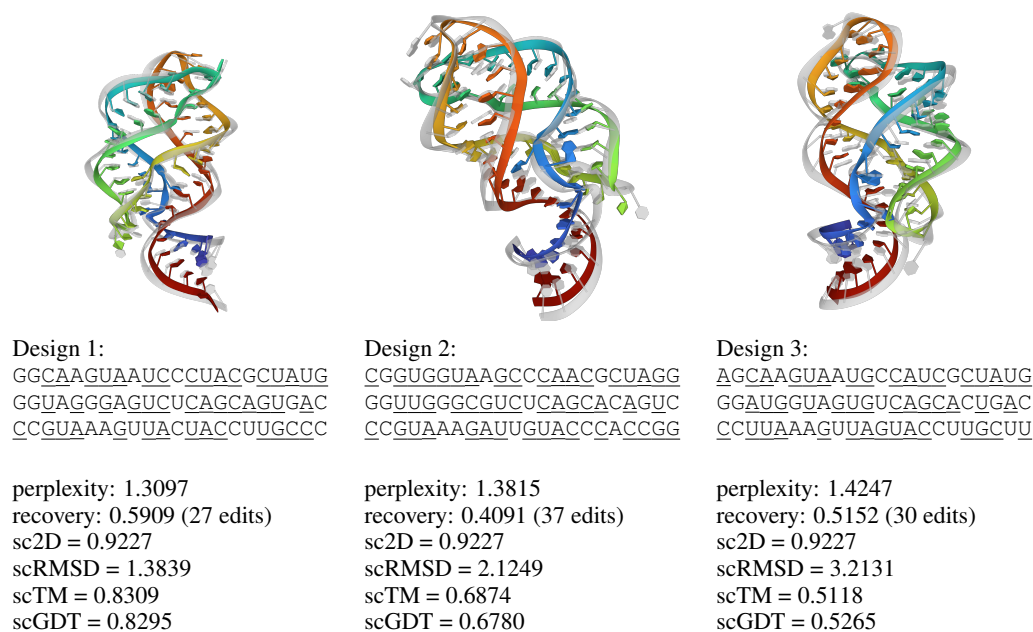


Figure 9: **Cherry-picked designs for Guanine riboswitch aptamer (PDB: 4FE5, sequence: GGACAUAUAAUCCGCGUGGAUAUAGGCACGCAAGUUUCUACCGGGCACCGUAAAUGUCCGACUAUGUCC)**. We show the RhoFold-predicted 3D structure in colour overlaid on the groundtruth structure in grey. Designs recover the base pairing patterns and tertiary structure of the RNA, as measured by high self-consistency score. gRNade’s perplexity is correlated well with 3D self-consistency scores and can be useful for ranking designs.

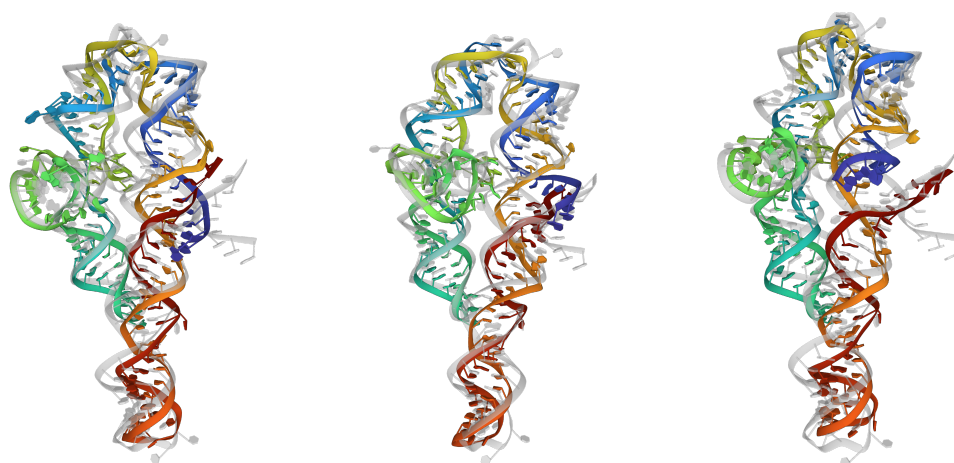

**Design 1:**

GGGGCUCCGGCGACGCAGUCG  
AGCCAGCAGUACCAAGCCUC  
 AGGGGAAACUUUGAGGUGGCCU  
AACAAAGGAUACGGUAAUAAGC  
 UGCGGGAAAAGGUUUAAGCCG  
GAGCGAAGACCUAAGGCACCGC  
UUUUGCGGGUGCUAUGGUUGAA  
 GUUAA

perplexity: 1.2462  
 recovery: 0.7170 (44 edits)  
 sc2D = 0.8301  
 scRMSD = 5.4562  
 scTM = 0.6481  
 scGDT = 0.4465

**Design 2:**

GGGUACCGGCGACGCAGUCG  
AAUGCCCUGUGGUACCAAGCC  
CCGGGGGAAACUUCGGGGUGG  
 CCUUACCAAGGACACGGUAAU  
 AAGCCACGGGAAUGGUUGUA  
AGCCGGUCCGAAGCCUAAGC  
CCGCGCUUUGGGCGCGCUAU  
 GGGUGAAGGCCAA


perplexity: 1.3273  
 recovery: 0.6226 (58 edits)  
 sc2D = 0.6896  
 scRMSD = 6.7239  
 scTM = 0.6300  
 scGDT = 0.4513

**Design 3:**

GAGGCCACGGCAACGCAGUC  
UACGCCUCUGUGGUACCAAG  
 UCUUAGGAGAAAUUUUAGA  
 UGGCCUAAUAAAAGGAUAUGG  
 UAAUAAGCCACGGGAAAAAGG  
UUGUAAGACGUGACGAAGUC  
CUAAGGCCACAGUUUUGCUG  
 UGGCUAUGGAUGGAGUACA

perplexity: 1.3204  
 recovery: 0.7044 (45 edits)  
 sc2D = 0.7922  
 scRMSD = 8.8211  
 scTM = 0.4582  
 scGDT = 0.2909

**Figure 10: Cherry-picked designs for Tetrahymena Ribozyme P4-P6 domain (PDB: 2R8S, sequence: GGAAUUGCGGGAAAGGGGUCAACAGCCGUUCAGUACCAAGUCUCAGGGGAAACUUUGAGAUGGC CUUGCAAAGGGUAUGGUAAUAAGCUGACGGACAUGGUCCUAACACGCAGCCAAGUCCUAAGUCAACAGAUC UUCUGUUGAUUAUGGAUGCAGUUA).**

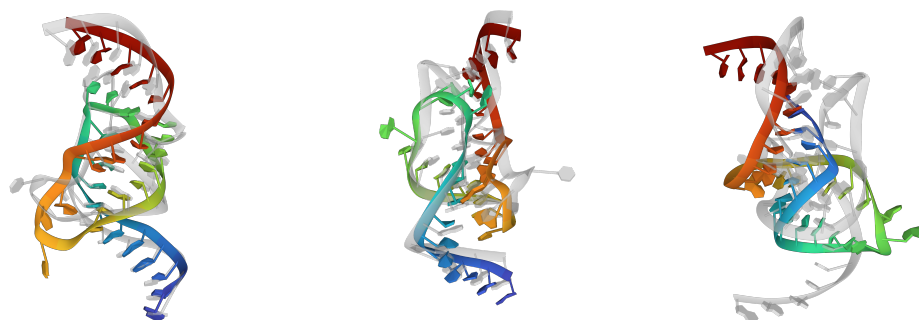

**Design 1:**

GUCAAACGCAGCCGAAA  
GCGCGAUAGUCCAGGAA

perplexity = 1.6237  
 recovery = 0.4571 (16 edits)  
 sc2D = -0.0074  
 scRMSD = 3.9505  
 scTM = 0.2597  
 scGDT = 0.4786

**Design 2:**

GGCAAACGCAGCCGAAA  
GCGCGUAGUCCCGGAC

perplexity = 1.6630  
 recovery = 0.4857 (16 edits)  
 sc2D = -0.0099  
 scRMSD = 3.3549  
 scTM = 0.2526  
 scGDT = 0.5000

**Design 3:**

CGUAGUCGGAGCCGAA  
GGCCGUUAGUCCAGGAG

perplexity = 1.7020  
 recovery = 0.4000 (17 edits)  
 sc2D = 0.4035  
 scRMSD = 16.4102  
 scTM = 0.0319  
 scGDT = 0.0571

**Figure 11: Cherry-picked designs for Vitamin B12 binding aptamer (PDB: 1ET4, sequence: GGAACCGGUGCGCAUAACCACCUCAGUGCGAGCAA).**

## E ADDITIONAL FIGURES

Figure 12: gRNAde model architecture.

Figure 13: Multi-graph tensor representation of RNA conformational ensembles.

Listing 1: Pseudocode for multi-state GNN encoder layer.

Figure 14: RNASolo data statistics.

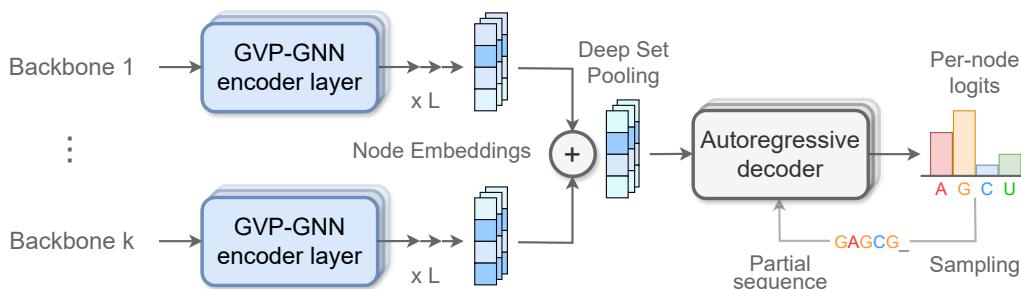


Figure 12: **gRNAde model architecture.** One or more RNA backbone geometric graphs are encoded via a series of SE(3)-equivariant Graph Neural Network layers (Jing et al., 2020) to build latent representations of the local 3D geometric neighbourhood of each nucleotide within each state. Representations from multiple states for each nucleotide are then pooled together via permutation invariant Deep Sets (Zaheer et al., 2017), and fed to an autoregressive decoder to predict a probabilities over the four possible bases (A, G, C, U). The probability distribution can be sampled to design a set of candidate sequences. During training, the model is trained end-to-end by minimising a cross-entropy loss between the predicted probability distribution and the true sequence identity.



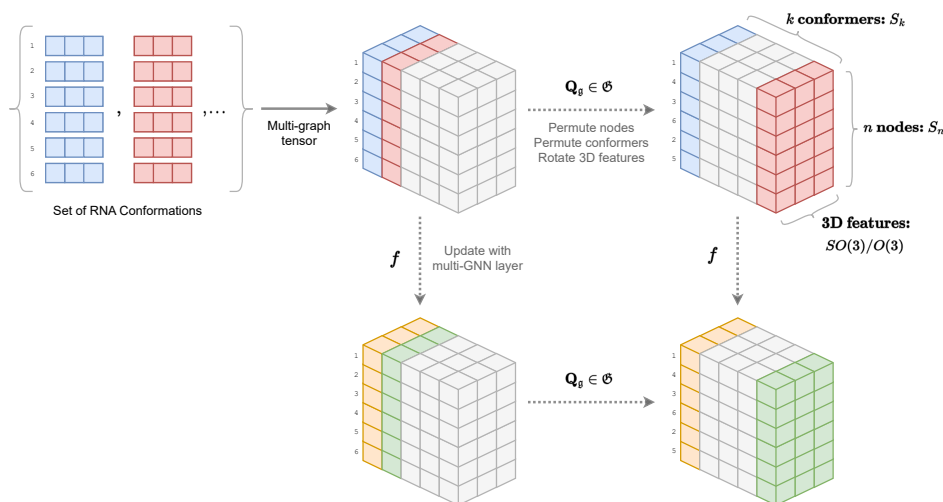


Figure 13: **Multi-graph tensor representation of RNA conformational ensembles**, and the associated symmetry groups acting on each axis. We process a set of  $k$  RNA backbone conformations with  $n$  nodes each into a tensor representation. Each multi-state GNN layer updates the tensor while being equivariant to the underlying symmetries; pseudocode is available in Listing 1. Here, we show a tensor of 3D vector-type features with shape  $n \times k \times 3$ . As depicted in the equivariance diagram, the updated tensor must be equivariant to permutation  $S_n$  of  $n$  nodes for axis 1, permutation  $S_k$  of  $k$  conformational states for axis 2, and rotation  $SO(3)/O(3)$  of the 3D features for axis 3.

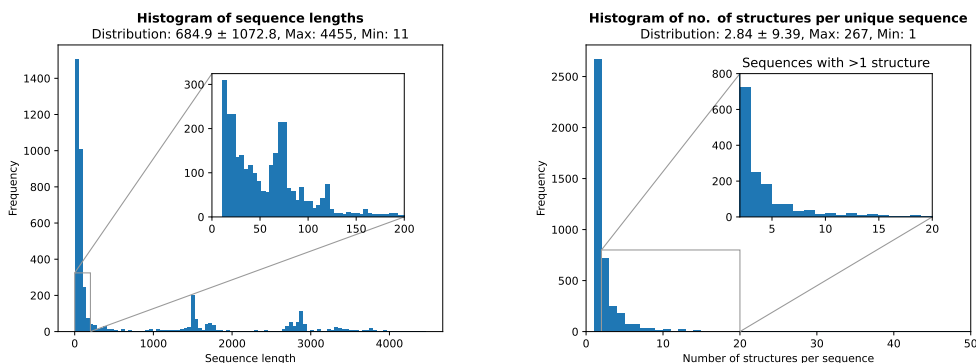

(a) **Sequence length.** The dataset is long-tailed in terms of RNA sequence length, with many short sequences including aptamers, riboswitches, ribozymes, and tRNAs (fewer than 200 nucleotides). The dataset also includes several longer ribosomal RNAs (thousands of nucleotides).

(b) **Number of structures per sequence.** The dataset covers a wide range of RNA conformation ensembles, with on average 3 structures per sequence. There are multiple structures available for 1,547 sequences. The remaining 2,676 sequences have one corresponding structure.

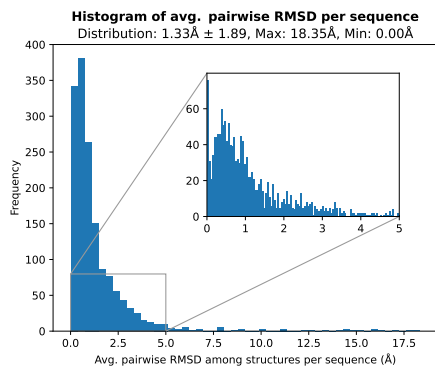

(c) **Average pairwise RMSD per sequence.** For 1,547 sequences with multiple structures, there is significant structural diversity among conformations. On average, the pairwise C4' RMSD among the set of structures for a sequence is greater than 1\text{\AA}.

(d) **Bivariate distribution for sequence length vs. avg. RMSD.** The joint plot illustrates how structural diversity (measured by avg. pairwise RMSD) varies across sequence lengths. We notice similar structural variations regardless of sequence length.

Figure 14: **RNASolo data statistics.** We plot histograms to visualise the diversity of RNAs available in terms of (a) sequence length, (b) number of structures available per sequence, as well as (c) structural variation among conformations for those RNA that have multiple structures. The bivariate distribution plot (d) for sequence length vs. average pairwise RMSD illustrates structural diversity regardless of sequence lengths.

```
1 class MultiGVPConv(MessagePassing):
2     '''GVPConv for handling multiple conformations'''
3
4     def __init__(self, ...):
5         ...
6
7     def forward(self, x_s, x_v, edge_index, edge_attr):
8
9         # stack scalar feats along axis 1:
10        # [n_nodes, n_conf, d_s] -> [n_nodes, n_conf * d_s]
11        x_s = x_s.view(x_s.shape[0], x_s.shape[1] * x_s.shape[2])
12
13        # stack vector feat along axis 1:
14        # [n_nodes, n_conf, d_v, 3] -> [n_nodes, n_conf * d_v*3]
15        x_v = x_v.view(x_v.shape[0], x_v.shape[1] * x_v.shape[2]*3)
16
17        # message passing and aggregation
18        message = self.propagate(
19            edge_index, s=x_s, v=x_v, edge_attr=edge_attr)
20
21        # split scalar and vector channels
22        return _split_multi(message, d_s, d_v, n_conf)
23
24    def message(self, s_i, v_i, s_j, v_j, edge_attr):
25
26        # unstack scalar feats:
27        # [n_nodes, n_conf * d] -> [n_nodes, n_conf, d_s]
28        s_i = s_i.view(s_i.shape[0], s_i.shape[1]//d_s, d_s)
29        s_j = s_j.view(s_j.shape[0], s_j.shape[1]//d_s, d_s)
30
31        # unstack vector feats:
32        # [n_nodes, n_conf * d_v*3] -> [n_nodes, n_conf, d_v, 3]
33        v_i = v_i.view(v_i.shape[0], v_i.shape[1]//(d_v*3), d_v, 3)
34        v_j = v_j.view(v_j.shape[0], v_j.shape[1]//(d_v*3), d_v, 3)
35
36        # message function for edge j-i
37        message = tuple_cat((s_j, v_j), edge_attr, (s_i, v_i))
38        message = self.message_func(message) # GVP
39
40        # merge scalar and vector channels along axis 1
41        return _merge_multi(*message)
42
43    def _split_multi(x, d_s, d_v, n_conf):
44        '''
45        Splits a merged representation of (s, v) back into a tuple.
46        '''
47        s = x[..., :-3 * d_v * n_conf].view(x.shape[0], n_conf, d_s)
48        v = x[..., -3 * d_v * n_conf:].view(x.shape[0], n_conf, d_v, 3)
49        return s, v
50
51    def _merge_multi(s, v):
52        '''
53        Merges a tuple (s, v) into a single 'torch.Tensor',
54        where the vector channels are flattened and
55        appended to the scalar channels.
56        '''
57        # s: [n_nodes, n_conf, d] -> [n_nodes, n_conf * d_s]
58        s = s.view(s.shape[0], s.shape[1] * s.shape[2])
59        # v: [n_nodes, n_conf, d, 3] -> [n_nodes, n_conf * d_v*3]
60        v = v.view(v.shape[0], v.shape[1] * v.shape[2]*3)
61        return torch.cat([s, v], -1)
```

Listing 1: **PyG-style pseudocode for a multi-state GVP-GNN layer.** We update node features for each conformational state independently while maintaining permutation equivariance of the updated feature tensors along both the first (no. of nodes) and second (no. of conformations) axes.

## F FAQs ON USING GRNADE

**How to chose the number of states to provide as input to gRNAd?** In general, this would depend on the design objective. For instance, designing riboswitches may necessitate multi-state design, while a single-state pipeline may be more sensible for locking an aptamer into its bound conformation (Yesselman et al., 2019). Note that it may be possible to benefit from multi-state gRNAd models even when performing single-state design by using slightly noised variations of the same backbone structure as an input conformational ensemble.

**How to prioritise or chose amongst designed sequences?** We have currently provided 3 types of evaluation metrics: native sequence recovery, structural self-consistency scores and perplexity, towards this end. We suspect that recovery may not be the ideal choice, except for design scenarios where we require certain regions of the RNA sequence to be conserved or native-like. Self-consistency scores may provide an overall more holistic evaluation metric as they accounts for alternative base pairings which still lead to similar structures as well as better capture the recovery of structural motifs responsible for functionality. However, structural self-consistency scores inherit the limitations of the structure prediction methods used as part of their computation. For instance, computing the self-consistency score between an RNA backbone and its own native sequence provides an upper bounds on the maximum score that designs can obtain under a given structure prediction method. Lastly, gRNAd's perplexity estimates the likelihood of a sequence given a backbone and can be useful for ranking designs and mutants in RNA engineering campaigns (especially for design scenarios where structure prediction tools are not performant).

In real-world design scenarios, we can pair gRNAd with another machine learning model (an 'oracle') for ranking or predicting the suitability of designed sequences for the objective (for instance, binding affinity or some other notion of fitness). We hope to conduct further experimental validation of gRNAd designs in the wet lab in order to better understand these tradeoffs.

**Why not average single-state logits over multiple states for multi-state design?** ProteinMPNN (Dauparas et al., 2022) proposes to average logits from multiple backbones for multi-state protein design. Here is a simple example to highlight issues with such an approach: Consider two states A and B, and choice of labels X, Y, and Z. For state A: X, Y, Z are assigned probabilities 75%, 20%, 5%. For state B: X, Y, Z are assigned probabilities 5%, 20%, 75%. Logically, label Y is the only one that is compatible with both states. However, averaging the probabilities would lead to label X or Z being more likely to be sampled in designs. As an alternative, gRNAd is based on multi-state GNNs which can take as input one or more backbone structures and generate sequences conditioned on the conformational ensemble directly.