

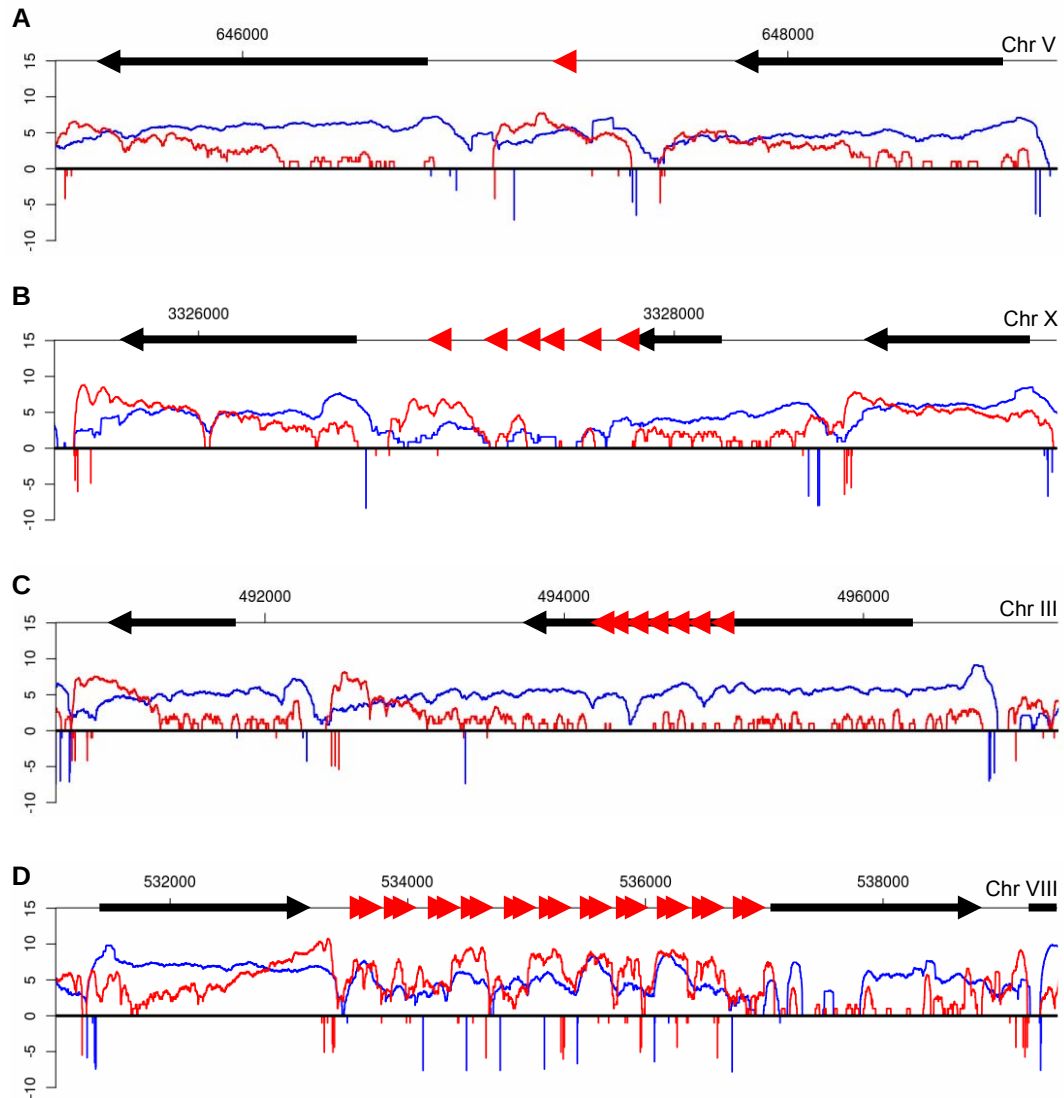


Figure S7. Examples of snoRNA-precursor transcripts. (A) A transcript containing a single snoRNA. (B) Multiple snoRNAs embedded in the 3' UTR of a protein coding transcript. (C) Multiple snoRNAs embedded in the ORF of a protein coding transcript. (D) A snoRNA cluster producing multiple precursor transcripts containing more than one snoRNA. All panels show the overlay of the number of reads ($\log_2$) from 5'-end- (blue) and 3'-end-enriched (red) libraries. Numbers of end-reads ($-\log_2$) are also shown (SL, blue; poly(A), red). Black arrows represent currently annotated ORFs and red arrowheads represent mature snoRNA sequences.