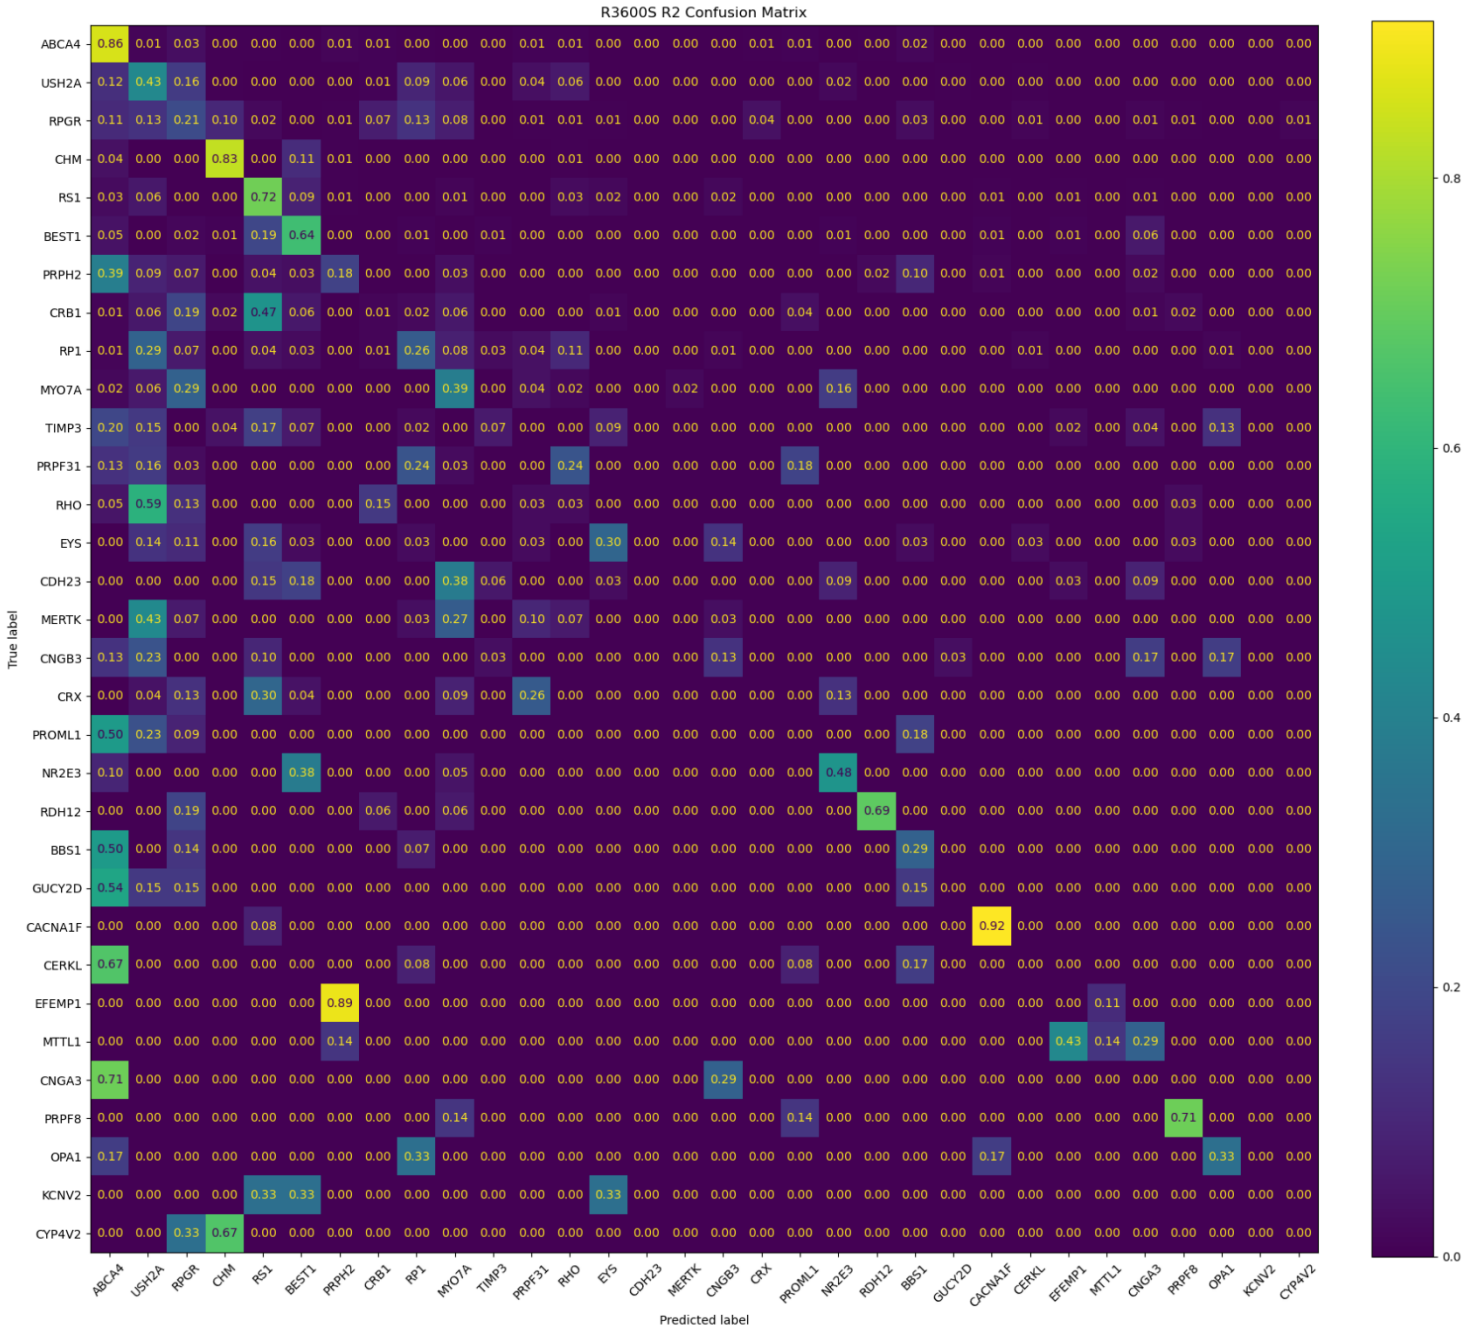Supplementary Figure 27: Confusion Matrix for the IRD classifier model trained on roughly 20% of the real IRD training dataset plus 3600 synthetic images (100 images augmented per class) (R3600S – Regime 2). Values are normalized over the true predictions (rows), thus each value represents the proportion of true examples classified by the model as the predict class indicated by the column.